
EEZ READER®

GM Z-KEY


10 CUT DOUBLE-SIDED NON-WARDED LOCKS

IF TOOL WON'T GO INTO LOCK - DO NOT FORCE IT!

1. Prepare the lock by flushing the lock with a degreaser. Exercise the wafers by inserting blank in and out of lock several times.

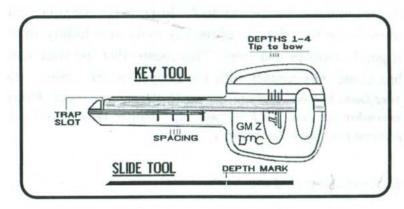


2. Put EEZ Reader® together, the slide and the key tool.

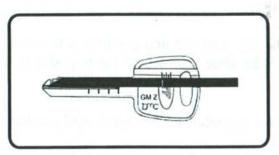

3. It is recommended that you start reading from the rear of the lock and work your way out towards the face cap. It is also important to cut the key accordingly. Remember that the door, deck and ignition locks are double-sided. You will trap and read one side and then turn the tool over and read the other side.

4. Capture a wafer in the trap slot by gently rocking the key

tool back and forth to settle the wafer into the trap slot.

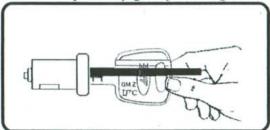

- 5. When a wafer has been trapped, apply and hold slight inward pressure on the key tool. Next, move the slide tool towards the trap slot (tip of the key tool), very lightly, until it gently touches and stops. This means that the slide tool has come into contact with the trapped wafer. (Note: We have found in some cases you may not be able to trap a wafer. Please remember this rule: If it will not trap, consider the depth #1 and progress from there if necessary.)
- 6. Read and record the depth.
- 7. Next, push the slide tool in to raise and release the trapped wafer.
- 8. Pull the key tool out and position it to catch the next wafer. Pull the slide tool out so the trap slot is no longer blocked.
- 9. Repeat the procedures 4 through 8 until you have read all the wafers.

EEZ READER® GM Z-KEY DOUBLE-SIDED NON-WARDED LOCKS

Key	D	lan	Ires
Lev	D	1411	BS.

B106

Code Card:

CX 263

Spacing	Depths	
1 - 1.033	1327	
2941	2306	
3849	3286 4265	
4757 5665	5245	
6573	3243	
7481	-	
8389		
9297		
10205		

 $\textit{EEZ READER}^{\scriptscriptstyle{\mathbb{B}}}$

Invented and Manufactured by

T. Doyle Mc Connell, Locksmith, Retired With support of the Grant Family Portland, Oregon

U.S. Pat. No. 4,680,870

Canadian Pat. No. 1,278,930