

ISO-BLOCO 600 premium edition



A Member of UKTFA




UK office

ISO-Chemie GmbH
Wheldon House, Front Street
Ebchester, Co. Durham DH8 0PJ
Tel +44 (0)1207 56 68 67
Fax +44 (0)1207 56 68 69
info@iso-chemie.co.uk
www.iso-chemie.co.uk

Head office

ISO-Chemie GmbH
Röntgenstraße 12
73431 Aalen, Germany
Tel. +49 (0)7361 / 94 90 - 0
Fax +49 (0)7361 / 94 90 90
info@iso-chemie.de
www.iso-chemie.de

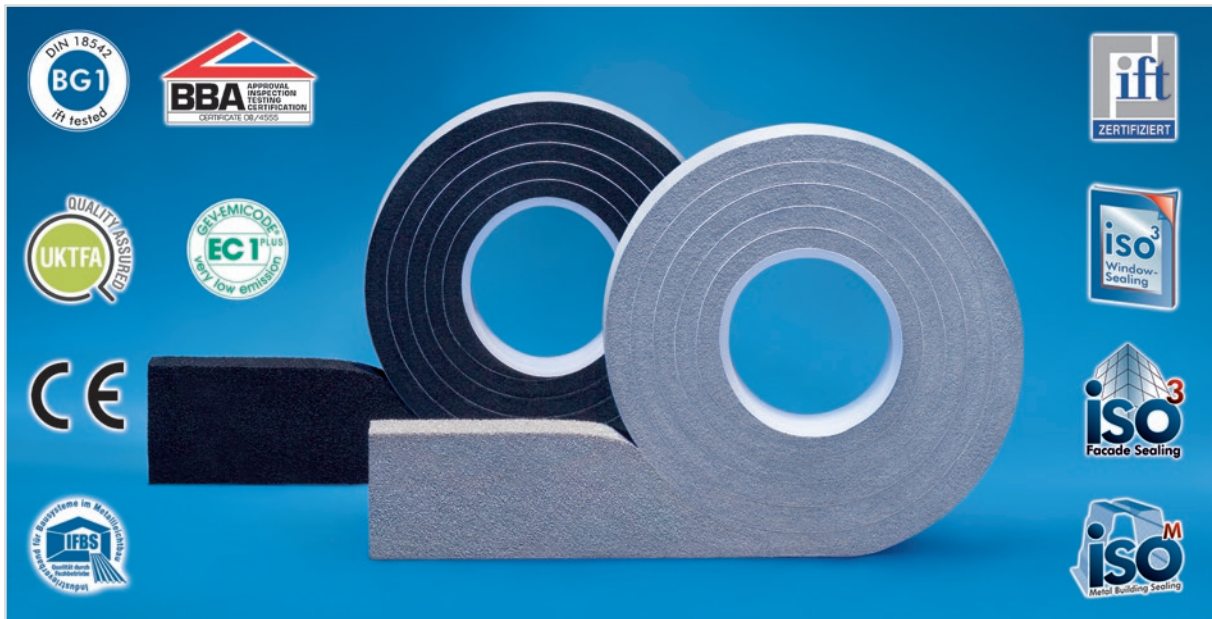

Product description

ISO-BLOCO 600 is a PUR sealing tape impregnated with a fire resistant polymeric dispersion. It is specially designed for joints in buildings up to 100 m high, in accordance with DIN 18055.

ISO-BLOCO 600 fulfils the stringent requirements of the DIN 18542 edition 2009. In addition to providing protection against driving rain to a minimum of 600 Pa (equivalent to wind force 11 - Violent Storm) the vapour permeable joint sealing tape also possesses outstanding thermal and acoustic characteristics, as well as allowing for diurnal movement.

Applications

A versatile product that has a wide range of uses, but generally for sealing construction joints (including moving joints) in areas such as:

- prefabricated concrete, and other material, elements (including civil engineering)
- perimeter seals for fenestration (windows/doors)
- skylights
- cladding panels
- curtain walling

Used in a variety of construction methods and industries including:

- general construction & civil engineering
- steel and/or timber framed buildings
- modular construction and other MMC types

Product advantages

- complies with the DIN 18542 BG 1 and DIN 18055
- reliability through a wider joint application range
- seals against wind, dust, driving rain
- vapour diffusion permeable
- good adhesive properties, to aid application
- permanently elastic with long term life expectancy
- thermal and acoustic insulation
- can be painted over with standard emulsion paints
- compatible with all known standard building materials
- applications in all construction areas and building types are possible
- CE-certified (ETA-07/0072)
- constant quality to DIN EN ISO 9001 & DIN standards, with regular controls from independent institutions
- externally supervised by ift Rosenheim: for driving rain and air permeability (a-value)
- 10 year performance guarantee*

Service

- standard sizes available from stock
- private label and/or special labelling available
- non standard lengths and widths available on request
- competent experienced technical support available in the field and by phone

Packaging

Pre-compressed rolls with one side self adhesive (to aid installation) in cardboard cartons

Technical Data

Standard

Classification

Material description		impregnated PUR flexible foam
Impregnant		fire resistant polymeric dispersion
Colour		grey, black
Classification, according to	DIN 18542	BG 1
Air permeability coefficient	DIN EN 12114	$\alpha \leq 1,0 \text{ m}^3/[\text{h} \cdot \text{m} \cdot (\text{daPa})^n]$ if externally supervised
Impermeable to driving rain, single joint	DIN EN 1027	$\geq 600 \text{ Pa}$ externally supervised by ift Rosenheim
Impermeable to driving rain, joint intersection	DIN EN 1027	$\geq 600 \text{ Pa}$
Temperature stability range	DIN 18542	-30 °C to +90 °C
UV light and weather stability	DIN 18542	requirements fulfilled
Compatibility with adjacent building materials	DIN 18542	requirements fulfilled
Dimension tolerance	DIN 7715 T5 P3	requirements fulfilled
Building material class	DIN 4102	B1 (fire resistant)
Thermal conductivity	DIN EN 12667	$\lambda = 0,052 \text{ W/m} \cdot \text{K}$
Water vapour diffusion resistance	DIN EN ISO 12572	$\mu \leq 100$
Long term stability		10 year performance guarantee*
sd-value	DIN EN ISO 12572	$\leq 0,5 \text{ m}$ for 50 mm width (vapour diffusion permeability)
Shelf life		2 years, dry and in original packing
Storage temperatur		+1 °C to +20 °C

ISO-BLOCO 600

dimension joint depth x width	recommended joint width *)	(metres) carton
8 / 1 - 2		740,0
10 / 1 - 2	1 - 2 mm	600,0
15 / 1 - 2		400,0
10 / 1 - 4		390,0
15 / 1 - 4	1 - 4 mm	260,0
20 / 1 - 4		195,0
15 / 2 - 6		240,0
20 / 2 - 6	2 - 6 mm	180,0
30 / 2 - 6		120,0
15 / 4 - 9		160,0
20 / 4 - 9	4 - 9 mm	120,0
30 / 4 - 9		80,0
15 / 5 - 12		112,0
20 / 5 - 12	5 - 12 mm	84,0
30 / 5 - 12		56,0
15 / 6 - 15		86,0
20 / 6 - 15	6 - 15 mm	64,5
30 / 6 - 15		43,0
20 / 9 - 20		49,5
25 / 9 - 20	9 - 20 mm	39,6
30 / 9 - 20		33,0
25 / 11 - 25		31,2
30 / 11 - 25	11 - 25 mm	26,0
35 / 18 - 34		26,4
40 / 18 - 34	18 - 34 mm	23,1
40 / 24 - 42		18,2
50 / 24 - 42	24 - 42 mm	15,6

Alternative dimensions available on request

*) Movement in structural elements and temporary longitude changes are to be taken into account by the max. joint width.

ISO-Sealing System

- 10 year performance guarantee*
- tested in accordance with state-of-the-art technology
- complies with the principles of the RAL-window installation instructions
- fulfils the requirements of the energy saving regulations (EnEV)

*On the conditions of the manufacturer (available upon request).

Additional products

- **ISO-PROFIL** filler strips and pieces for trapezoid and wave profiles
- **ISO-ZELL** for sealing and thermal insulation of construction elements, including windows
- **ISO-FLAME** for increased fire protection on constructions
- **ISO-CONNECT** for professional window sealing in accordance with the RAL-installation instructions
- **ISO-MEMBRA SX** a special sealing tape for a reliable sealing on moving joints with extremely large joint tolerances