



Shown actual size: Skylark dimmer and 1-gang Claro wallplate in White (WH).

### Product family features









- Rocker switch returns light to your favorite light level
- Slide up to brighten, down to dim (adjust light to suit any activity)
- eco-dim® model available
- 1000 W preset dimmers have voltage compensation which maintains stable light levels, despite line voltage variations
- 100% factory tested
- Coordinating Claro® and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates, see pg. 155

### Control types


 Single-pole (one location)

 3-way or 4-way (two or more locations)

### Direct load type compatibility

-  Incandescent/halogen lighting
-  Magnetic low-voltage lighting
-  Electronic low-voltage lighting
-  Fluorescent lighting
-  LED lighting
-  Dimmable compact fluorescent
-  Ceiling fans
-  Ceiling fan/lights

### Load type requiring load interface

 Neon/cold cathode lighting

Lighting load interfaces may be applicable for some additional load type, voltage and capacity combinations.

For additional information, see pg. 174.

### Available finishes

Use **BOLD** color code in model number (Example: S-600P-**GR**)

Gloss finishes\*



**WH**  
White



**LA**  
Light Almond



**AL**  
Almond



**IV**  
Ivory



**GR**  
Gray



**BR**  
Brown



**BL**  
Black



**SS**  
Stainless Steel

\*Coordinating wallplates only available separately. For wallplate information, see pg. 160.

Stainless Steel wallplate includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls.

## Dimmers

### Slide-to-off dimmers



- Slide up to on/brighten; down to dim/off

### Dimmers with on/off switch and locator light



- Rocker switch turns on/off
- Slide up to brighten; down to dim
- Includes amber locator light

### Dimmers with on/off switch



- Rocker switch turns on/off
- Slide up to brighten; down to dim
- **eco-dim**® model guarantees at least 15% energy savings compared to a standard switch

## Fan and fan/light controls

### Slide-to-off fan controls



- Slide up to on/increase speed; down to decrease/off
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum

### Slide-to-off fan controls with on/off light switch



#### Fan control (top)

- Slide up to on/increase fan speed; down to decrease fan speed/off
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum

#### Switch (bottom)

- Rocker switch turns light on/off

## Dual devices

### Dual slide-to-off dimmers (two loads)



#### Dimmers (left/right)

- Slide up to on/brighten; down to dim/off

### Dual slide-to-off fan control and dimmer



#### Fan control (left)


- Slide up to on/increase speed; down to decrease/off
- 3-quiet fan speeds for increased comfort
- Quiet 3-speed designed to prevent motor hum
- Fully variable available for use with multiple paddle or exhaust fans

#### Dimmer (right)



- Slide up to on/brighten; down to dim/off

Connections overview

Load connections\*

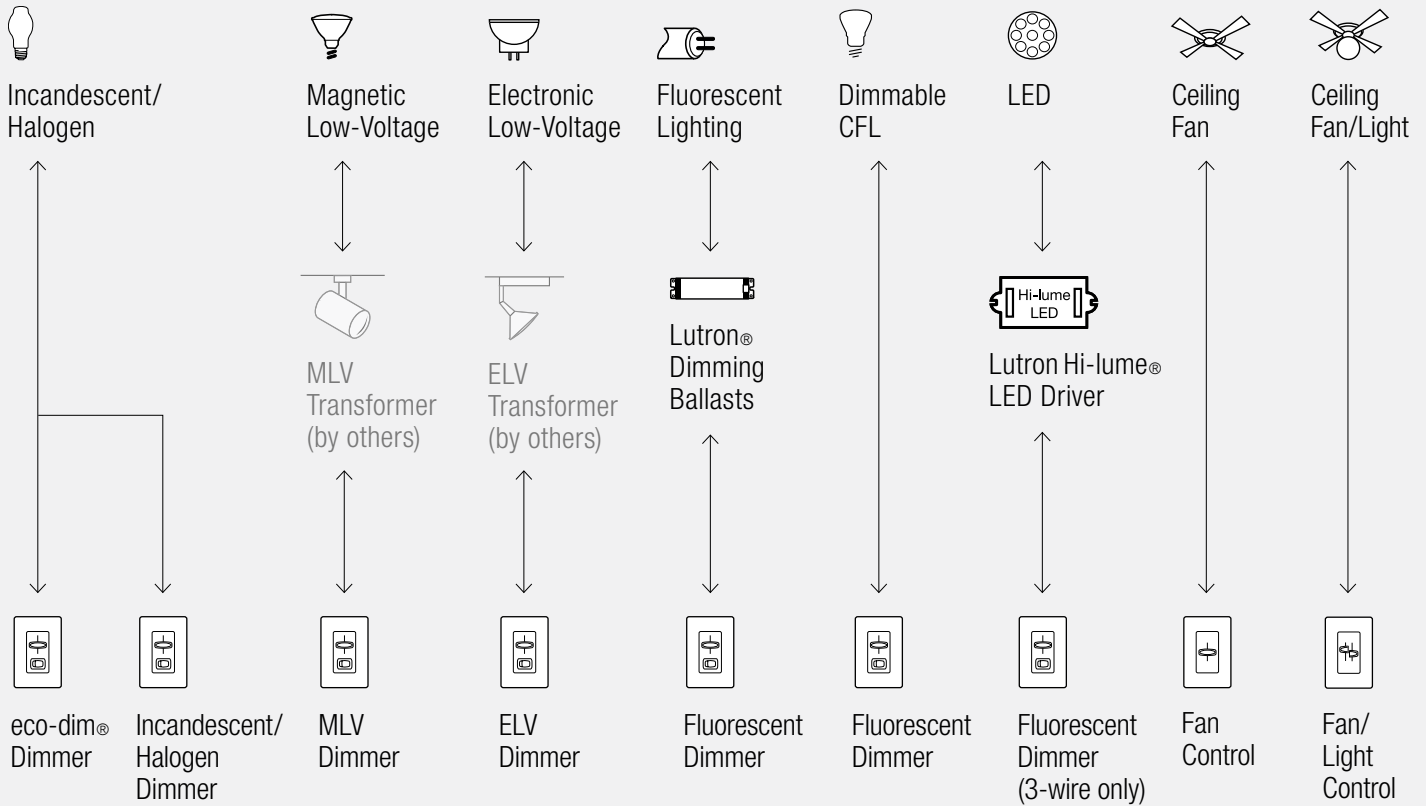

Control types (for 2 or more locations)  
Dim from one location, switch from the others

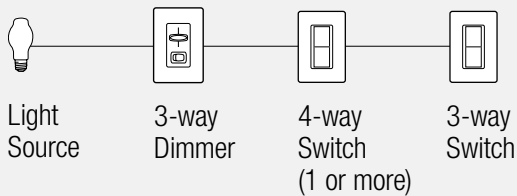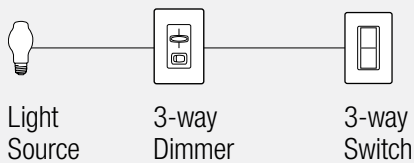

For more information on ballasts, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).  
For more information on LED drivers, visit [www.lutron.com/LED](http://www.lutron.com/LED).

\*For illustration purposes only. Consult model number pages for specific voltage and capacity information.

### Dimmer model numbers

#### Incandescent/halogen dimmers

##### Dimmers with on/off switch

|                           |                                |
|---------------------------|--------------------------------|
| Single-pole<br>120V 600W  | S-600P- <b>CC</b> <sup>3</sup> |
| Single-pole<br>120V 1000W | S-10P- <b>CC</b> <sup>3</sup>  |
| 3-way<br>120V 600W        | S-603P- <b>CC</b> <sup>3</sup> |
| 3-way<br>120V 1000W       | S-103P- <b>CC</b> <sup>3</sup> |

##### eco-dim® dimmer with on/off switch

|                                |                                 |
|--------------------------------|---------------------------------|
| 3-way/single-pole<br>120V 600W | S-603PG- <b>EE</b> <sup>2</sup> |
|--------------------------------|---------------------------------|

eco-dim model guarantees at least 15% energy savings compared to a standard switch.

##### Dimmers with on/off switch and locator light

|                           |                                  |
|---------------------------|----------------------------------|
| Single-pole<br>120V 600W  | S-600PNL- <b>CC</b> <sup>3</sup> |
| Single-pole<br>120V 1000W | S-10PNL- <b>CC</b> <sup>3</sup>  |
| 3-way<br>120V 600W        | S-603PNL- <b>CC</b> <sup>3</sup> |
| 3-way<br>120V 1000W       | S-103PNL- <b>CC</b> <sup>3</sup> |

##### Slide-to-off dimmers

|                           |                                |
|---------------------------|--------------------------------|
| Single-pole<br>120V 600W  | S-600- <b>CC</b> <sup>3</sup>  |
| Single-pole<br>120V 1000W | S-1000- <b>CC</b> <sup>3</sup> |

For dual slide-to-off dimmers (two loads), see page 111.

**CC**<sup>3</sup>: Gloss color codes, see pg. 105  
**EE**<sup>2</sup>: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)  
 (Wallplates not included, order separately, see pg. 160)

#### Magnetic low-voltage dimmers

##### Dimmers with on/off switch

|                                  |                                  |
|----------------------------------|----------------------------------|
| Single-pole<br>120V 600VA (450W) | SLV-600P- <b>CC</b> <sup>3</sup> |
| 3-way<br>120V 600VA (450W)       | SLV-603P- <b>CC</b> <sup>3</sup> |

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

#### Electronic low-voltage dimmers\*

##### Dimmers with on/off switch

|                          |                                   |
|--------------------------|-----------------------------------|
| Single-pole<br>120V 300W | SELV-300P- <b>CC</b> <sup>3</sup> |
| 3-way<br>120V 300W       | SELV-303P- <b>CC</b> <sup>3</sup> |

Certain LED drivers are dimmable using an ELV dimmer, for more information, visit [www.lutron.com/LED](http://www.lutron.com/LED).

All models must be derated if ganged unless otherwise noted, see pg. 170.

\*Requires neutral wire connection.

## Dimmer model numbers

### 3-wire fluorescent dimmers\*

#### Dimmers with on/off switch

|                        |                                      |
|------------------------|--------------------------------------|
| Single-pole<br>120V 8A | SF-10P- <b>CC</b> <sup>3</sup>       |
| Single-pole<br>277V 6A | SF-12P-277- <b>CC</b> <sup>3</sup>   |
| 3-way<br>120V 8A       | SF-103P- <b>CC</b> <sup>3</sup>      |
| 3-way<br>277V 6A       | SF-12P-277-3- <b>CC</b> <sup>3</sup> |

For use with Hi-lume®, Hi-lume® Compact SE, Hi-lume® 3D, Eco-10®, EcoSystem® ballasts.

No derating required if ganged.

Adjustable low-end trim.

### Hi-lume® LED drivers: 3-wire fluorescent dimmers\*

#### Dimmers with on/off switch

|                        |                                      |
|------------------------|--------------------------------------|
| Single-pole<br>120V 8A | SF-10P- <b>CC</b> <sup>3</sup>       |
| Single-pole<br>277V 6A | SF-12P-277- <b>CC</b> <sup>3</sup>   |
| 3-way<br>120V 8A       | SF-103P- <b>CC</b> <sup>3</sup>      |
| 3-way<br>277V 6A       | SF-12P-277-3- <b>CC</b> <sup>3</sup> |

For use with Hi-lume LED driver only.

For more information on Hi-lume LED drivers, visit [www.lutron.com/HilumeLED](http://www.lutron.com/HilumeLED).

No derating required if ganged.

Adjustable low-end trim.

**CC**<sup>3</sup>: Gloss color codes, see pg. 105  
(Wallplates not included, order separately,  
see pg. 160)

### Tu-Wire® fluorescent dimmers

#### Dimmers with on/off switch

|                              |                                   |
|------------------------------|-----------------------------------|
| 3-way/single-pole<br>120V 5A | SFTU-5A3P- <b>CC</b> <sup>3</sup> |
|------------------------------|-----------------------------------|

Also compatible with Advance Mark X ballasts, for further information, visit [www.lutron.com/advance](http://www.lutron.com/advance).

For information on use with Universal and OSRAM ballasts, contact Technical Support at 1.800.523.9466.

### Philips Energy Saver DIMMABLE CFL dimmer (screw base)

#### Dimmer with on/off switch

|                                |                                   |
|--------------------------------|-----------------------------------|
| 3-way/single-pole<br>120V 200W | SPDC-203P- <b>CC</b> <sup>3</sup> |
|--------------------------------|-----------------------------------|

UL listed for Philips screw base dimmable compact fluorescent (CFL) lamps.

Use only with Philips models: EL/A R30 DIM, R40 DIM, PAR38 DIM.

No derating required if ganged.

For more information on ballasts, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).

All models must be derated if ganged unless otherwise noted, see pg. 170.

\*Requires neutral wire connection.

## Fan control model numbers

### ✂ Fan controls

#### Slide-to-off fan controls—quiet 3-speed

Single-pole SFSQ-F-**CC**<sup>3</sup>  
120V 1.5A

Single-pole SFSQ-F-HO-**CC**<sup>3</sup>  
120V 2.0A

For use with only one ceiling paddle fan.

SFSQ-F-HO- for use with Hunter Original Series.

#### Slide-to-off fan control—fully variable

Single-pole SFS-5E-**CC**<sup>3</sup>  
120V 5A

For use with multiple ceiling paddle fans or exhaust fans.

### ✂ Fan/light controls

#### Fan control—quiet 3-speed and dimmer

Single-pole fan control S2-LFSQ-**CC**<sup>3</sup>  
120V 1.5A (left)

120V single-pole dimmer 300W (right)

For use with only one ceiling paddle fan.

#### Fan control—fully variable and dimmer

Single-pole fan control S2-LF-**CC**<sup>3</sup>  
120V 2.5A (left)

120V single-pole dimmer 300W (right)

For use with multiple ceiling paddle fans.

### ✂ Fan control/light switch

#### Fan control—quiet 3-speed and switch

Single-pole fan control SFSQ-LF-**CC**<sup>3</sup>  
120V 1.5A (top)

120V single-pole switch 360W (bottom)  
(incandescent/halogen loads only)

**CC**<sup>3</sup>: Gloss color codes, see pg. 105  
(Wallplates not included, order separately,  
see pg. 160)

All models must be derated if ganged unless  
otherwise noted, see pg. 170.

**\*Requires neutral wire connection.**