



## 7-Day Digital In-Wall Programmable Timer Switch

**Model No: HET01-C**

### Description

Wiring your lights through a timer switch like the Enerlites HET01 can help save you money while adding a level of convenience and safety to your home. This Enerlites 7-day programmable timer switch has the flexibility of being able to use eighteen different programs per week. This unit works with incandescent and halogen lighting. The large and easy-to-read LCD screen displays the current day of week, time, Auto/Manual mode, whether the Load is ON or OFF, and in programming. Manual override switch enables load to be turned on/off. This unit also has a built-in rechargeable battery and the programming is protected during power outages.


### Features

- For use with incandescent and halogen lights up to 500 watts and 150W LED
- 7-day programming (up to 18 on and 18 off times per week)
- Two operating modes: Manual or Automatic (conventional on/off switch)
- Sleek design mounts flush with wall plate
- Programming protected during power outages
- Manual override enables load to be turned on/off
- Built-in rechargeable battery last up to 14 days

### Specifications

Voltage .....	120VAC @ 60Hz
Resistive .....	15amp, 1800W
Tungsten .....	1200W
Ballast .....	1200VA
Motor .....	1/2HP

### Wiring Diagram:

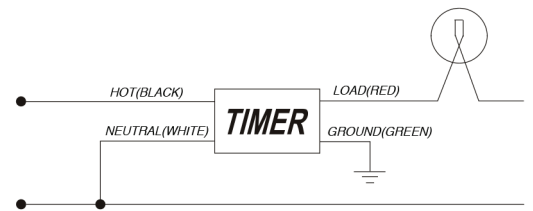

### Testing & Code Compliance

