


## Transformer - 300 W Pool & Spa Safety Transformer, Stainless Steel Enclosure, Input 120V, Output 12,13,14 V

Item PX300S

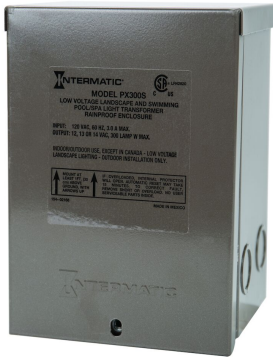

### PRODUCT DESCRIPTION

These safety transformers are specifically designed to supply 12-14 VAC and are suitable for direct connection to underwater pool/spa lights. A grounded shield between the primary and secondary winding assures safe operation. Built-in circuit protection will disconnect power to the transformer in case of an overload.

### FEATURES

- ▶ Mounting brackets on the top and bottom
- ▶ Built-in circuit protection disconnects power temporarily in case of overload
- ▶ Complies with NEC Code 680.23 requirements for underwater luminaries

### APPLICATIONS

- ▶ Landscape Lighting
- ▶ Underwater Lighting

### TECHNICAL DATA

General	
Model Number	PX300S
Description	300 W Pool & Spa Safety Transformer, Stainless Steel Enclosure, Input 120V, Output 12,13,14 V
UPC Code	078275067578
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

### Mechanical Specifications

Enclosure Type	3R Brown stainless steel
----------------	--------------------------

### Dimensions

Product Dimensions (H x W x D) in	7.25 x 5.25 x 4.5 in
Knockout Dimensions Bottom	(4) combination 1/2" - 3/4"
Knockout Dimensions Back	(2) combination 1/2" - 3/4"
Knockout Dimensions Left	(2) combination 1/2" - 3/4"
Knockout Dimensions Right	(2) combination 1/2" - 3/4"

### Material Specifications

Color	Beige
-------	-------

### Electrical Specifications

Output Voltages	12 VAC; 13 VAC; 14 VAC
Maximum Power Consumption (W)	300 W
Transformer (W)	300
Transformer Input Voltage	3 A, 120 VAC, 60 Hz
Transformer Output Voltage	12, 13, 14 VAC

### Packaging

Product Weight (kg)	4.65
Unit Carton Dimensions (H x W x L) in	7.88 x 4.56 x 5.69 in
Product Weight (lbs)	10.25

**Standards and Certifications**

CSA Certification	cCSAus
Other Certifications and Compatibilities	NEC Code 680.23
California Proposition 65	DEHP

---

## ACCESSORIES



ET-NF  
RC Snubber Noise Filter 24-277VAC/DC for Electronic Controls