



8mm Striplight Connector

Use with 8mm wide striplights with 2 'targets'
to connect to roundwire miniature wiring




1. Cut ExtraBrite Striplights to the desired length at a cut-line (there is a cut-line every 3 emitters)

2. Open the 'Door' on the opposite side from the wires.

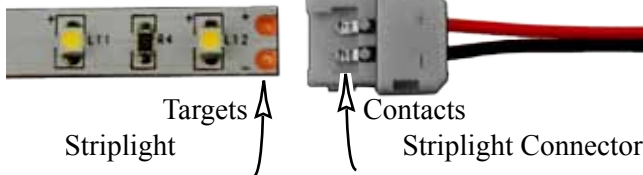

3. Slide the Striplight under the contacts so the contacts are centered on the targets.

The "+" on the Striplight lines up with the "+" on the Connector (the red wire)

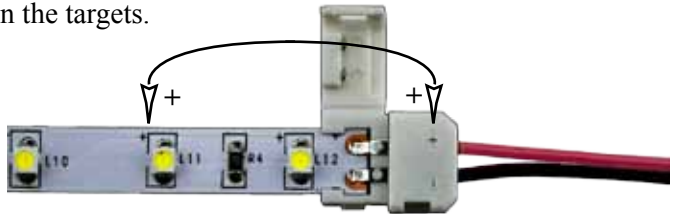

4. Squeeze the door closed until it snaps in place.



5. Pinch 1/2" or so of insulation off.



6. Twist the connector's wire and the house's wire together, "+" to "+" and "-" to "-" (red to striped).



Cover the bare wire with tape or other insulation.