


Acoustic Dampener Placement

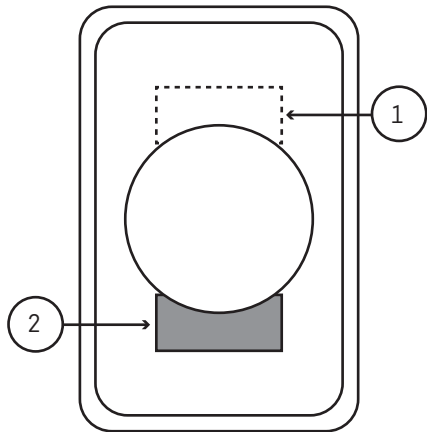

1. SUGGESTED PLACEMENT

2. FIXED DAMPENER

Installation Guide

REMOVE THE HEADPHONE PAD FROM THE HEADPHONE CUP. PLACE YOUR PREFERRED ACOUSTIC DAMPENER ONTO THE AREA OF HEADPHONE CUP WHERE THE CUTOUT WILL ALIGN. RETURN THE HEADPHONE PAD TO THE HEADPHONE CUP CLICKING THE CUP INTO PLACE VIA THE ALIGNMENT PINS AND MAGNETIC CONNECTION. ENJOY THE UPDATED TUNING.



THE LOWER NUMBER VALUE OF THE ACOUSTIC DAMPENER THE HIGHER THE LEVEL OF MID AND LOW FREQUENCY RESPONSE WILL BE. ALL INCLUDED VALUES HAVE ACOUSTIC MERIT AND ARE WORTH YOUR TIME TO EXPERIMENT WITH TO FIND THE RIGHT SOUND FOR YOU.

ACOUSTIC DAMPENER
TUNING GUIDE

CAMPFIRE
AUDIO

CASCADE


VISIT US AT CAMPFIREAUDIO.COM

CAMPFIRE AUDIO'S NAMES AND LOGOS ARE
PROTECTED BY US COPYRIGHT



HD7


PORE SIZE = 7 μ m



NOTCH IDENTIFICATION

HD10


PORE SIZE = 10 μ m



NOTCH IDENTIFICATION

HD12


PORE SIZE = 12 μ m



NOTCH IDENTIFICATION

HD15

PORE SIZE = 15 μ m



NOTCH IDENTIFICATION