

PRODUCT DESCRIPTION




- Operating Watt: 5W.
- Diameter: 13.8 inch (350mmx350mmx23mm).
- Color of Light: Red.
- Waterproof: IP67 rated
- Usage: spare tire wheel brake light.
- Placement on vehicle: Rear.

JK INSTALLATION STEPS




- Fits 2007-2017 Jeep Wrangler
- Fits 16"+ Rims, may fit some 15" rims.
- Fits Jeep Wranglers with 5" X 4.5" and 5" X 5" wheel hubs.

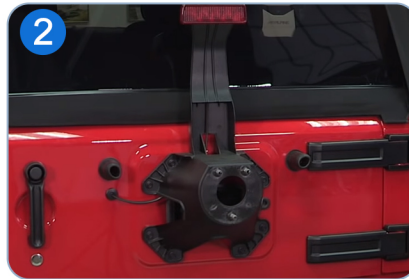

Remove the spare tire from your vehicle following owners manual.



Expose the wiring harness as the figure showed.

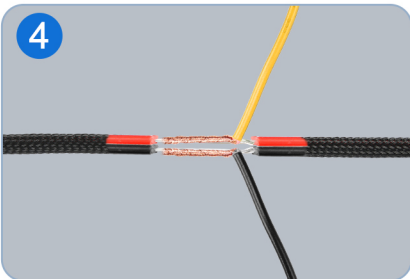

Cut the wire harness and reveal the wire cores. Connect the yellow wire of the spare tire light to the red wire of the original high brake light.



Connect the red wire (RGB) to the ACC or the wire of turn signal light (All fuses over 5A can be used. Note: Please use an extension cord if connect the wire to ACC)



Glue all the wire harnesses with tape, then install the spare tire back on the vehicle, the installation is complete.

JL INSTALLATION STEPS



Remove the third spare tire
(Note: Be careful not to damage the camera in the middle.)



Remove all the screws of the third brake light.



Use a plastic screwdriver to separate the plastic plate of the high brake light.

Please repeat the above wiring steps.