

# SG9085 GARDEN LIGHT

## STANDARD SPECIFICATIONS

### HOUSING

Attractive traditional styling is constructed entirely of die-cast aluminum.

### LENS / DIFFUSER

Tempered glass panels protect Edison-bulb style LED. Premium materials won't yellow or crack.

### LAMP PERFORMANCE – 5000K STANDARD

3.5W LED Array – 400Lm – 5000K – 85 CRI

L80 rating: 75,000 hrs

3000K – 6000K Color Temperature Option

Operating Ambient Temperature: -25°C – 65°C | -13°F – 149°F

32hrs Autonomous Operation – Automatic On/Off

Assured Operation When Installed In Direct Sun

### POWER COLLECTION

5.2W Monocrystalline Solar Panel – 20.2% Efficiency

### POWER STORAGE

6.4V LiFePO<sub>4</sub> Battery – 4.5Ah – 2,000 Cycle Rating

### MOUNTING

Ground mount – 4-hole pattern accepts up to 3/8" bolts



### FINISH

Available in various color options; polyester powder coat.

### WARRANTY

Accompanied by 5 year limited warranty.

For ordering or questions please contact SELS USA at 704-495-3535 or [CustomerService@SELSLED.com](mailto:CustomerService@SELSLED.com)

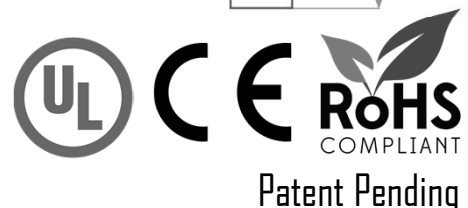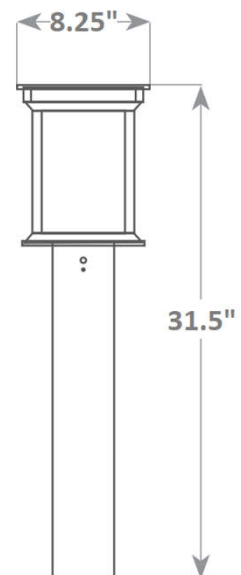


# SG9085 GARDEN LIGHT



## OPTICAL ASSEMBLY DETAILS

---

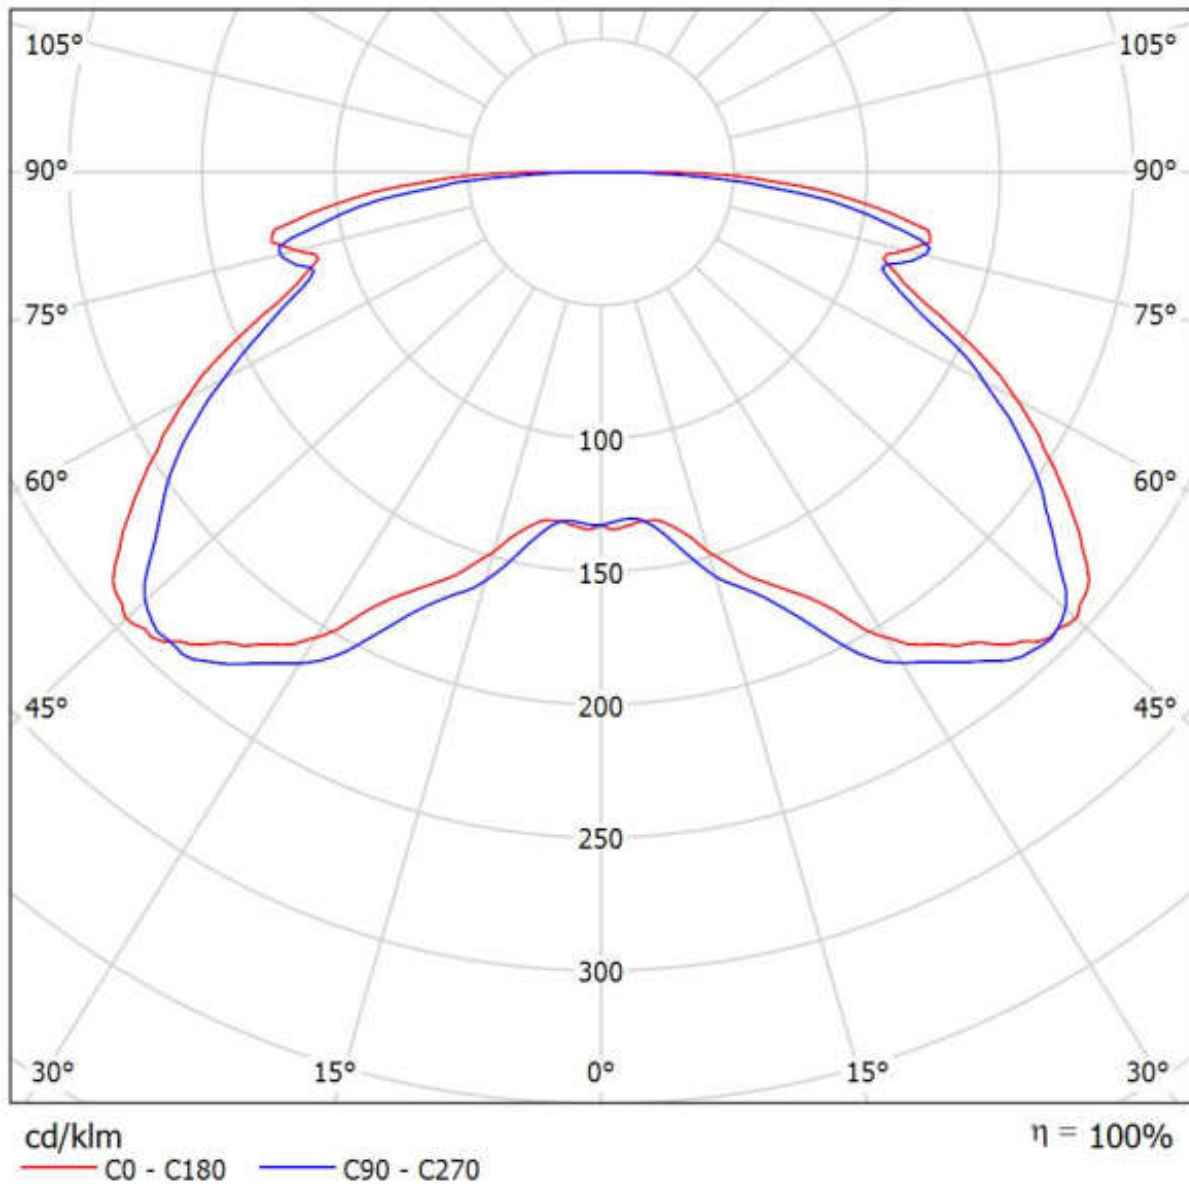

For ordering or questions please contact SELS USA at  
704-495-3535 or [CustomerService@SELSLED.com](mailto:CustomerService@SELSLED.com)