

SP9550 PARK LIGHT

STANDARD SPECIFICATIONS

HOUSING

The sleek, modern styling is constructed entirely of die-cast aluminum.

LENS / DIFFUSER

UV stabilized polycarbonate panel covering LED array.
Premium materials won't yellow or crack.

LAMP PERFORMANCE – 5000K STANDARD

15W LED Array – 2000lm – 5000K – 85 CRI – L80 rating:
75,000 hrs

Operating Ambient Temperature: -25°C – 65°C | -13°F – 149°F

36hrs Autonomous Operation – Automatic On/Off

Assured Operation When Installed In Direct Sun

POWER COLLECTION

35W Monocrystalline Solar Panel – 20.2% Efficiency

POWER STORAGE

12.8V LiFePO₄ Battery – 15Ah – 2,000 Cycle Rating

MOUNTING

Has a fitter designed for 4" diameter poles. Comes with optional 10.5' steel pole (Total Height: 11.5 ft).


FINISH

Available in various color options; polyester powder coat.

WARRANTY

Accompanied by 5 year limited warranty.


For ordering or questions please contact SELS USA at
704-495-3535 or CustomerService@SELSLED.com

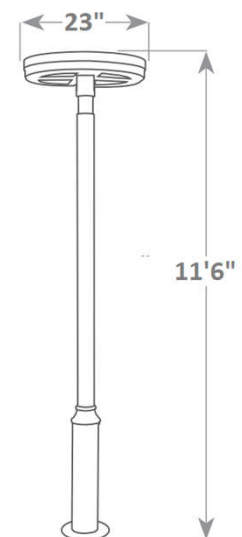

Patent Pending

SP9550 PARK LIGHT

OPTICAL ASSEMBLY DETAILS

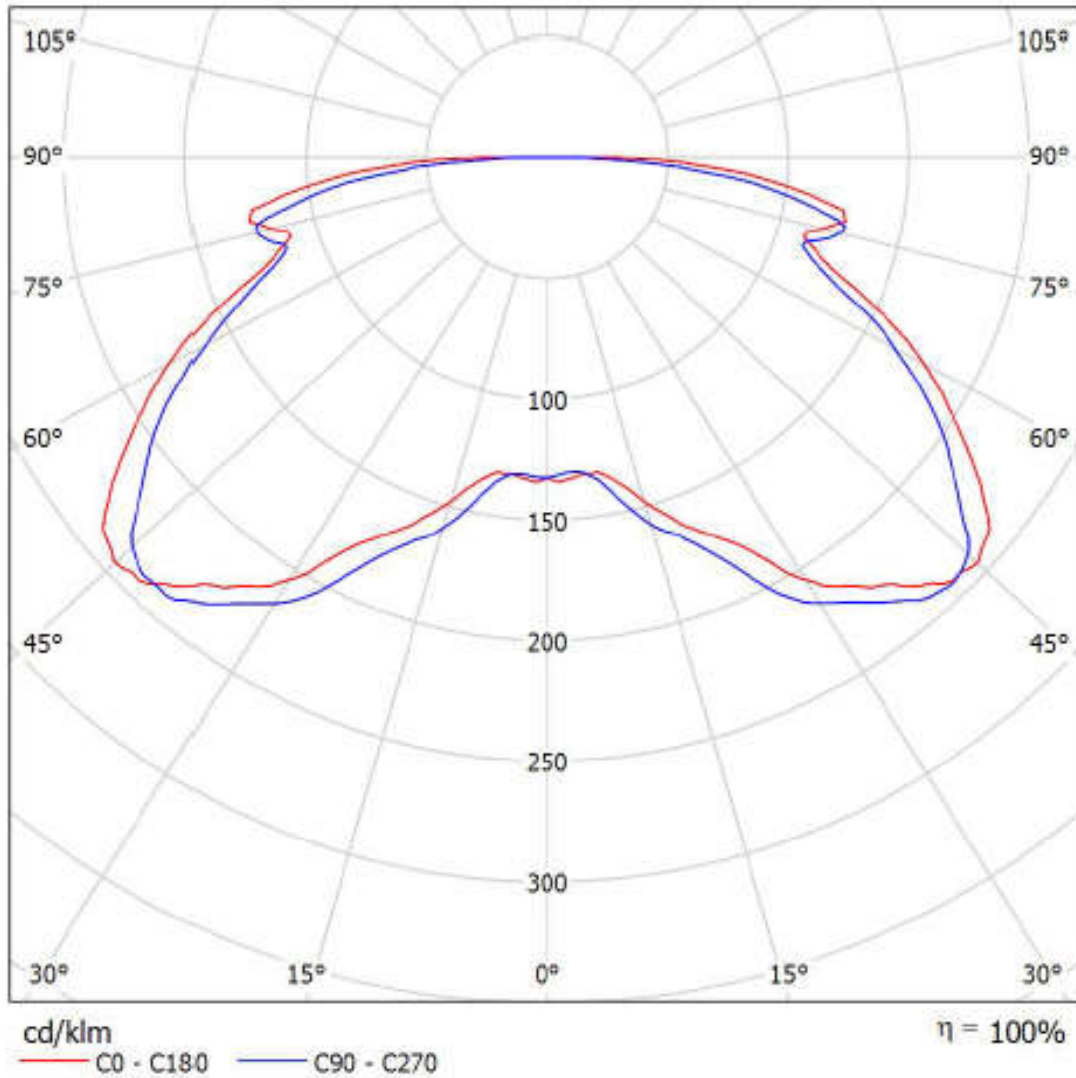

For ordering or questions please contact SELS USA at
704-495-3535 or CustomerService@SELSLED.com