

SP9555 PARK LIGHT

STANDARD SPECIFICATIONS

HOUSING

The sleek, modern styling is constructed entirely of die-cast aluminum.

LENS / DIFFUSER

UV stabilized polycarbonate panel covering LED array. Premium materials won't yellow or crack.

LAMP PERFORMANCE – 5000K STANDARD

14W LED Array – 1800lm – 5000K – 85 CRI – L80 rating: 75,000 hrs

Operating Ambient Temperature: -25°C – 65°C | -13°F – 149°F

36hrs Autonomous Operation – Automatic On/Off – Assured Operation When Installed In Direct Sun

POWER COLLECTION

33W Monocrystalline Solar Panel – 20.2% Efficiency

POWER STORAGE

12.8V LiFePO₄ Battery – 20Ah – 2,000 Cycle Rating

MOUNTING

Has a fitter designed for 3" diameter poles. Comes with optional 6.5' aluminum pole (Total Height: 8.2 ft).


FINISH

Available in various color options; polyester powder coat.

WARRANTY

Accompanied by 5 year limited warranty.

For ordering or questions please contact SELS USA at 704-495-3535 or CustomerService@SELSLED.com

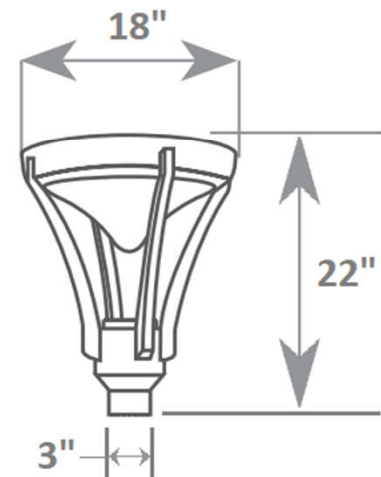


Patent Pending

SP9555 PARK LIGHT



OPTICAL ASSEMBLY DETAILS

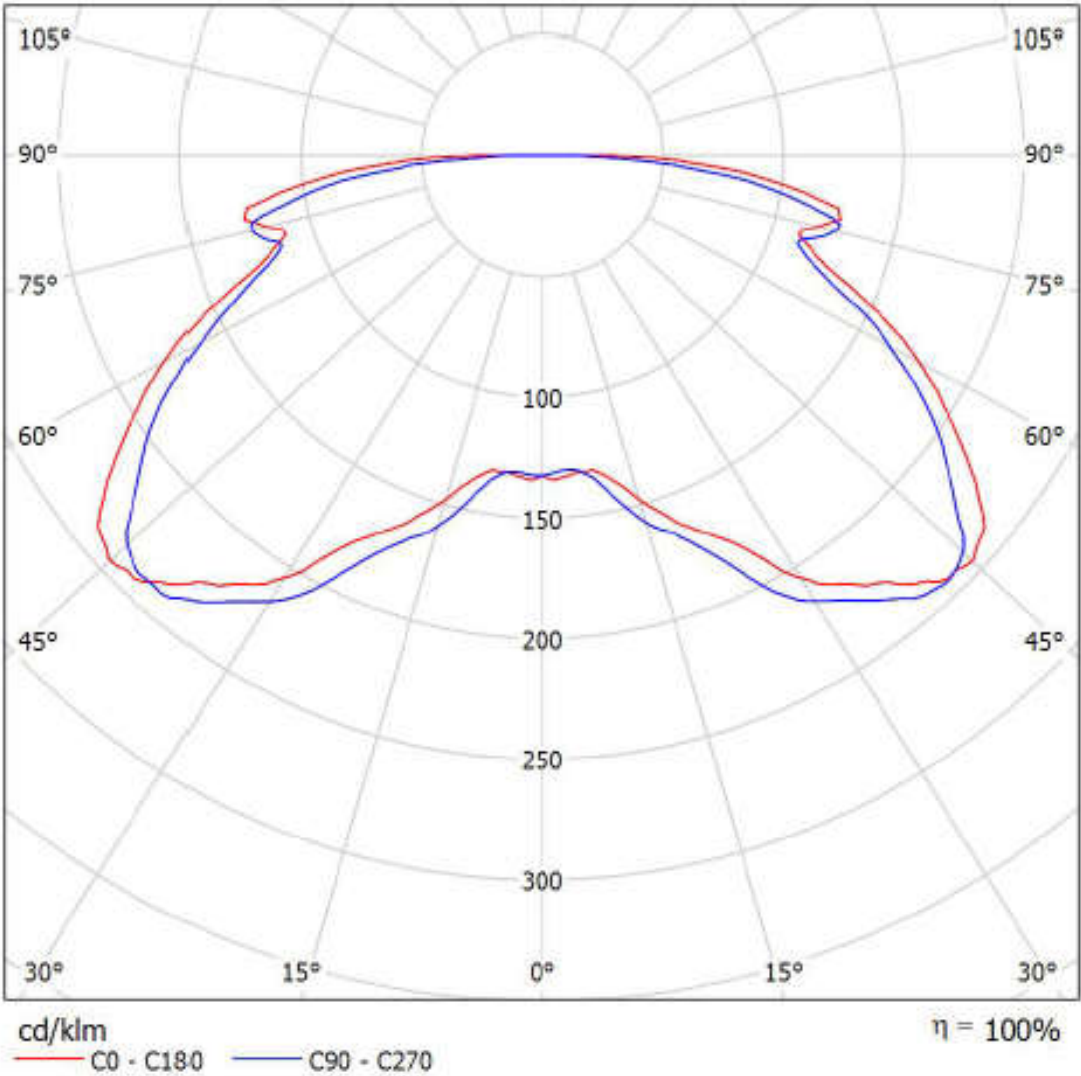

For ordering or questions please contact SELS USA at 704-495-3535 or CustomerService@SELSLED.com