




**HP:** 75-300  
**Pole:** 4/6

**Frame:** 365T-449T  
**Volt:** 460V

**RPM:** 1800/1200  
**Body:** T

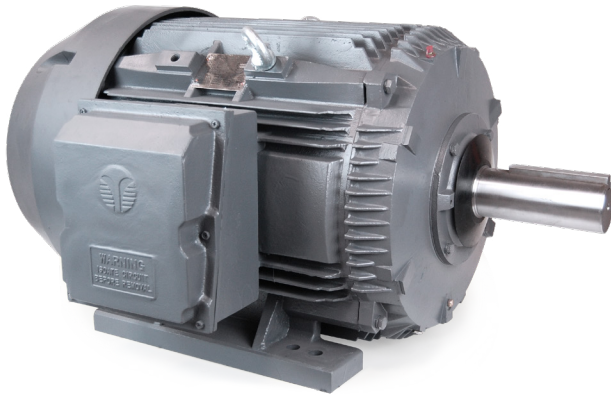

## STANDARD FEATURES



- NEMA Premium Efficiency- Design C Torque
- 6 Lead - 460V
- Drive-end Roller Bearing
- Oversized Bearings on DE & ODE
- 1.15 Service Factor
- 40° C Ambient Temperature Rated
- VPI Lap Wound Coil
- Wye-Delta Start Wound
- 4140 Carbon Steel Shaft
- Zerk Fitting Regreaseable Bearing
- Full Cast Iron Construction
- Double Lip Oil Seals on DE & ODE
- Rubber Slinger
- Split Conduit Box is 90° Rotatable
- F1 to F2 Field Convertible ( Shipped F1)
- Class F Insulation with Class H Stator
- EISA Compliant
- 24 Month Warranty from Purchase Date

HP	Sync. Speed	Model Number	LRT	List Price
75	1800	OX3-CI-TF-365T-4-RR-E-75	331%	\$ 6,903
	1200	OX3-CI-TF-405T-6-RR-E-75	275%	\$ 8,097
100	1800	OX3-CI-TF-405T-4-RR-E-100	219%	\$ 8,290
	1200	OX3-CI-TF-444T-6-RR-E-100	210%	\$ 12,558
125	1800	OX3-CI-TF-444T-4-RR-E-125	269%	\$ 12,603
	1200	OX3-CI-TF-445T-6-RR-E-125	217%	\$ 13,870
150	1800	OX3-CI-TF-445T-4-RR-E-150	222%	\$ 15,067
	1200	OX3-CI-TF-447T-6-RR-E-150	236%	\$ 17,532
200	1800	OX3-CI-TF-447T-4-RR-E-200	243%	\$ 18,837
	1200	OX3-CI-TF-449T-6-RR-E-200	241%	\$ 21,917
250	1800	OX3-CI-TF-449T-4-RR-E-250	228%	\$ 21,375
300	1800	OX3-CI-TF-449T-4-RR-E-300	251%	\$ 24,446

**Lift Strap  
Included**

