



LAWN & GARDEN EQUIPMENT



made in the
 **USA**
with US and imported components

CONSUMER TILLERS

You don't have to be a professional to own garden equipment that works and lasts.

Our consumer tiller line is perfect for homeowners. We offer a wide array of easy to use tillers to provide you with the power and tine speed you need. Sturdiness, simplicity and ease of maintenance guaranteed, you only have to choose the model.

Knowing that soil conditions and all gardeners are not alike, Maxim manufactures its tillers with options and the flexibility of a multitude of accessories.

Choose your power, tine speed and attachments, then let the equipment help with the hard work of gardening.



STEEL CONSTRUCTION



SERVICEABLE CHAIN DRIVE TRANSMISSION



ADJUSTABLE TILLING WIDTH



2-YEAR WARRANTY

FOR CONSUMERS

CONSUMER TILLERS

**MINI
MAX**
TILLER/CULTIVATOR

POWERED BY
HONDA

HEAVY-DUTY
TRANSMISSION



	MTC35H	MS50B	MS50NB
ENGINE	Honda GX35, 35 cc	Briggs & Stratton 750 Series, 163 cc	Briggs & Stratton 550 Series, 127 cc
TRANSMISSION	Exclusive, Heavy-Duty Gear Drive	Chain Drive (Available with Reverse)	Chain Drive
TINE SPEED (MAX)	250 RPM	78 RPM	78 RPM
TINES	Steel Forged Tines (6)	Heat-Treated, Welded Slasher Tines	Heat-Treated, Welded Slasher Tines
TILLING WIDTH	7" to 16"	14" or 26"	14" or 26"
TILLING DEPTH	Up to 8"	Up to 10"	Up to 10"
DRAG BAR	Standard	Standard	Standard
HANDLES	3/4" - .06" Thick Q195 Steel	1" - 14 Gauge Tubular Steel	1" - 14 Gauge Tubular Steel
HITCH	N/A	Stamped Hitch with 3/8" x 1.5" Drag Stake	Stamped Hitch with 3/8" x 1.5" Drag Stake
WHEELS	1.375" x 7"	10 x 1.75 (for transport only)	8 x 1.75 (for transport only)
INCLUDED ACCESSORIES	N/A	N/A	N/A
LENGTH	47"	55"	55"
WIDTH	17.25"	26"	26"
HEIGHT	36.75"	36"	40"
SHIPPING WEIGHT	50 lbs	135 lbs	130 lbs



NEW Mini Max

New to the line-up, Maxim's Mini Max is a tiller/cultivator in one. Till hard soil to create new garden beds or prepare soil for planting by loosening and mixing soft soil for planting. Transport wheels and drag stake adjust without tools.

CONSUMER TILLERS



	M30NB	MT50B
ENGINE	Briggs & Stratton 550 Series, 127 cc	Briggs & Stratton 750 Series, 163 cc
TRANSMISSION	Chain Drive	Chain Drive (Available with Reverse)
TINE SPEED (MAX)	150 RPM	72 RPM
TINES	Heat-Treated, Welded Slasher Tines	Heat-Treated, Welded Slasher Tines
TILLING WIDTH	13" or 19"	14" or 26"
TILLING DEPTH	Up to 8"	Up to 10"
DRAG BAR	Standard	Standard
HANDLES	1" - 14 Gauge Tubular Steel	1" - 14 Gauge Tubular Steel
HITCH	Stamped Hitch with 3/8" x 1.5" Drag Stake	Precision Cast Hitch with Spring Loaded Pin
WHEELS	8 x 1.75 (for transport only)	10 x 1.75 (for transport only)
INCLUDED ACCESSORIES	N/A	N/A
LENGTH	51"	57"
WIDTH	23"	24"
HEIGHT	36"	39"
SHIPPING WEIGHT	130 lbs	140 lbs



Drag Bar

Drag bar comes standard and enables the operator to ensure a consistent working depth.

COMMERCIAL TILLERS

Tillers in the rental industry must be able to withstand heavy use, rough handling and transportation bruises, yet still rent tomorrow.

These beefy tillers combine ease of operation and maintenance to make a tiller worthy of the Maxim name.

Maxim front tine tillers feature heavy gauge steel, heat treated tines, lift bar and a ruggedly built transmission. For additional durability, an extra heavy-duty frame offers reinforcements at points of stress. It's this simple, yet sturdy design that makes Maxim tillers low maintenance and easy to use.



STEEL CONSTRUCTION



SERVICEABLE CHAIN DRIVE TRANSMISSION



ADJUSTABLE TILLING WIDTH



STEEL TRANSPORT WHEELS



LIFT HANDLE



HEAVY-DUTY BOLT-ON TINES



2-YEAR WARRANTY

FOR COMMERCIAL USERS

COMMERCIAL TILLERS



	RM4H	RMT65BVG
ENGINE	Honda GX120, 118 cc	Briggs & Stratton, 205cc
TRANSMISSION	Chain Drive	Chain Drive
TINE SPEED (MAX)	150 RPM	72 RPM
TINES	Heavy-Duty Bolo Tines with Replaceable, Bolt-On Blades	Heavy-Duty Slasher Tines with Replaceable, Bolt-On Blades
TILLING WIDTH	13" or 19"	14" or 26"
TILLING DEPTH	Up to 8"	Up to 10"
DRAG BAR	Standard	Heavy-Duty with Spring Loaded Pin
HANDLES	1" - 14 Gauge Tubular Steel	1" - 12 Gauge Tubular Steel
HITCH	Stamped Hitch with 3/8" x 1.5" Drag Stake	Precision Cast Hitch with Spring Loaded Pin
WHEELS	8 x 1.75 (for transport only)	10 x 1.75 (for transport only)
INCLUDED ACCESSORIES	N/A	N/A
LENGTH	55"	61"
WIDTH	23"	24"
HEIGHT	36"	39"
SHIPPING WEIGHT	110 lbs	146 lbs



Bolo Tines vs. Slasher Tines

Bolo tines have broad blades for deeper digging and mulching without clogging. Slasher tines are shorter and sharper – ideal for breaking through thick vegetation or roots.



POWERED by
HONDA

RMT55H

Honda GX160, 163cc

Chain Drive

72 RPM

Heavy-Duty Slasher Tines
with Replaceable, Bolt-On Blades

14" or 26"

Up to 10"

Heavy-Duty with Spring Loaded Pin

1" - 12 Gauge Tubular Steel

Precision Cast Hitch with Spring Loaded Pin

10 x 1.75
(for transport only)

N/A

61"

24"

39"

147 lbs



MAXIMIZE YOUR TILLING



Chain Drive Transmission

Maxim's chain drive transmission is enclosed in our specially designed double-welded case with additional reinforcements to keep lower supports secure. An extra metal shield keeps wires and vines from getting into the seal.

TILL 'N PLOW®

Make your gardening friends jealous with our largest front tine tiller.

Standard accessories package includes A-frame cultivator, an 8" furrower kit, and left and right turn shovels. Till using heat-treated Slasher tines with replaceable blades. Standard 16" Sure Grip tractor wheels can be filled with water for improved traction.



STEEL CONSTRUCTION



SERVICEABLE CHAIN DRIVE TRANSMISSION



ADJUSTABLE TILLING WIDTH

2-YEAR WARRANTY

FOR CONSUMERS



	TP50B
ENGINE	Briggs & Stratton 750 Series, 163 cc
TRANSMISSION	Chain Drive
TINE SPEED (MAX)	72 RPM
TINES	Heat-Treated Slasher Tines with Replaceable, Bolt-On Blades
TILLING WIDTH	14" or 26"
TILLING DEPTH	Up to 10"
DRAG BAR	Heavy-Duty with Spring Loaded Pin
HANDLES	1" - 14 Gauge Tubular Steel
HITCH	Precision Cast Hitch with Spring Loaded Pin
WHEELS	For Transport Only: 10 x 1.75 For Drive: 4.80 / 4.80 Agricultural Lug
INCLUDED ACCESSORIES	A-Frame Cultivator, 8" Furrower and 2 Turn Shovels
LENGTH	57"
WIDTH	24"
HEIGHT	39"
SHIPPING WEIGHT	200 lbs

PLOW HOSS

Maxim's one wheel garden cultivator comes with a selection of plows – does everything a mule and plow used to do, only faster!

Get improved traction by filling 6-12 Super Sure Grip tractor lug tires with water.

Standard attachments include 8" furrower, 7" turn shovel and 12" sweep. Furrower makes rows, turn shovel builds up rows and sweep eliminates weeds.

{ PLOWS
LIKE A MULE }
WITHOUT THE KICK



STEEL CONSTRUCTION



6:1 GEAR REDUCTION

2-YEAR WARRANTY

FOR CONSUMERS

PLOW HOSS



	PH50B
ENGINE	Briggs & Stratton 550 Series, 127 cc
TRANSMISSION	6:1 Gear Reduction (Box on Engine)
HANDLES	1" - 14 Gauge Steel
WHEELS	6-12 Super Sure Grip Tractor Lug
INCLUDED ACCESSORIES	7" Turn Shovel, 12" Sweep & 8" Furrower
LENGTH	77"
WIDTH	26"
HEIGHT	44"
SHIPPING WEIGHT	160 lbs



Improve Traction

Fill tractor lug tires with water for improved traction.

ACCESSORIES

A variety of attachments for your tiller or plow give you the versatility to complete the job at hand.



A-FRAME CULTIVATOR KIT

ACCESSORIES



A-Frame Cultivator Kit
PN: KT1932-B



A-Frame Turn Shovel Kit
PN: KT1933



Brackets
PN: 336701



Cultivator Blades
PN: 336703

Picture coming soon.

Picture coming soon.

Cultivator: 3-Spring
PN: 336688

Cultivator: 3-Spring
PN: 336708

Picture coming soon.

Picture coming soon.

Picture coming soon.



Depth Gauge Kit
PN: KT1940



Furrower, 8"/10"
PN: 336695/336696



Furrower Opener Kit
PN: KT1942



Rotors, Aerator
PN: 130775



Shovel, Corn
PN: 336711



Shovel, Turn (RH)
PN: 336697



Shovel, Turn (LH)
PN: 336698

Picture coming soon.



Spoon, Aerator (2)
PN: 130764

Standards
PN: 336700



Sweep, 12"/18"
PN: 336693/336694



Till Hoe
PN: 336801

Picture coming soon.

Picture coming soon.

Tiller Conversion Kit
PN: KT1935

Tiller Conversion Kit
PN: KT1935-A



Tines, Bolo
PN: 130744



Tines, Mini Bolo
PN: 130832



Tines, Finger
PN: 130750



Tines, Finger
PN: 130752



Tines, Slasher
PN: 130761



Tines, Slasher
PN: 130718



Tines, Slasher
PN: 130717



Tines, Pick
PN: 130774

HI-WHEEL PLOWS

Perfect for smaller gardens, this human powered cultivator will furrow and weed your tilled soils. Its been around for generations because it's easy to push and maneuver.

The 4.5-foot handles provide excellent leverage and maneuverability.

Standard attachments include double point blade, turn shovel and 5-tine cultivator. Double point blade makes rows, turn shovel builds up rows and cultivator removes weeds.



HUMAN POWERED



2-YEAR WARRANTY

FOR CONSUMERS

HI-WHEEL PLOWS



BHW-24

HANDLE LENGTH	4.5'
HANDLE MATERIAL	Wood
WHEEL DIAMETER	24"
WHEEL MATERIAL	Steel
INCLUDED ACCESSORIES	Double Point Blade, Turn Shovel & 5-Tine Cultivator
LENGTH	60"
WIDTH	24"
HEIGHT	38"
SHIPPING WEIGHT	20 lbs



{ DOUBLE POINT BLADE }



{ TURN SHOVEL }



SEE IT IN ACTION ON
YouTube



{ CULTIVATOR }

PLUG AERATORS

Maxim tow-behind aerators are perfect for residential or commercial use.

Aerators easily attach to your riding lawn mower with widths as small as 36" to fit through gates and as large as 48" for bigger properties.

Plug aerators utilize built-in spoons to remove plugs of soil from the turf. These small holes allow oxygen, water and nutrients to reach grass roots.

Plug aerators are ideal for clay soils and larger lawns.



STEEL CONSTRUCTION



REINFORCED BOLT-IN SPOON MOUNT




GREASABLE BEARINGS

2-YEAR WARRANTY

FOR CONSUMERS

PLUG AERATORS

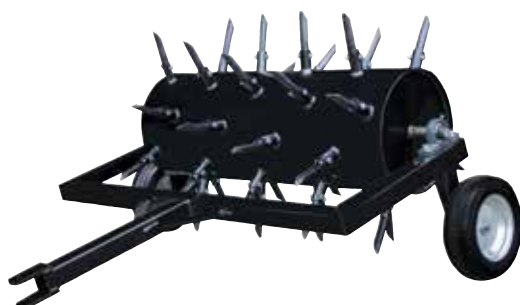

	MSP36	MSP48
AERATION WIDTH	36"	48"
OVERALL WIDTH	52"	64"
TINES	Bolt-On Sod Pluggers	Bolt-On Sod Pluggers
PLUG QUANTITY	36	44
TINE LENGTH	6"	6"
PLUG PENETRATION DEPTH	4"	4"
WATER CAPACITY	24 Gallons / 200 lbs	32 Gallons / 267 lbs
HITCH	No Pin Included	No Pin Included
WHEELS	410/350-4, 2-Ply with Greasable Ball Bearings (for transport only)	410/350-4, 2-Ply with Greasable Ball Bearings (for transport only)
TOWING SPEED	5 mph	5 mph
LENGTH	52"	52"
WIDTH	52"	80"
HEIGHT	27" on Wheel / 25" on Plug	27" on Wheel / 25" on Plug
SHIPPING WEIGHT	125 lbs	135 lbs



SPIKE AND PLUG AERATORS SHOWN

TRANSPORTING

Transport with wheels in down position, then when ready to begin aeration, simply rotate hitch over top of unit and hook to mower to begin aeration.

Wheels are not for highway use. Not applicable for 3-point hitch models.

SPIKE AERATORS

Maxim tow-behind aerators are perfect for residential or commercial use.

Aerators easily attach to your riding lawn mower with widths as small as 36" to fit through gates and as large as 48" for larger properties.

Spike aerators utilize spikes to slice holes in the turf, pushing the soil aside. This loosens the soil allowing oxygen, water and nutrients to reach grass roots.

Spike aerators are ideal for sandy soils and smaller lawns.

 STEEL CONSTRUCTION

 GREASABLE BEARINGS

2-YEAR WARRANTY

FOR CONSUMERS

SPIKE AERATORS



	MSAT36	MSAT48 / MSA3P48
AERATION WIDTH	36"	48"
OVERALL WIDTH	52"	64"
TINES	Welded Steel Tines	Welded Steel Tines
SPIKE QUANTITY	78	102
TINE LENGTH	2.75"	2.75"
SPIKE PENETRATION DEPTH	2.75"	2.75"
WATER CAPACITY	24 Gallons / 200 lbs	32 Gallons / 267 lbs
HITCH	No Pin Included	No Pin Included or 3-Point Hitch
WHEELS	410/350-4, 2-Ply with Greasable Ball Bearings (for transport only)	410/350-4, 2-Ply with Greasable Ball Bearings (for transport only)
TOWING SPEED	5 mph	5 mph
LENGTH	52"	52"
WIDTH	52"	80"
HEIGHT	24" on Wheel / 18.5" on Spike	24" on Wheel / 18.5" on Spike
SHIPPING WEIGHT	115 lbs	120 lbs



SPIKE AND PLUS AERATORS SHOWN

TRANSPORTING

Transport with wheels in down position, then when ready to begin aeration, simply rotate hitch over top of unit and hook to mower to begin aeration.

Wheels are not for highway use. Not applicable for 3-point hitch models.

LAWN ROLLERS

Our rollers help you achieve a professional, beautiful lawn by packing down sod or seed, smoothing out ruts or mole tunnels and flattening ant and mole hills. Eliminate the damaged look from the freezing and thawing weather cycle your lawn endures.

 STEEL CONSTRUCTION

 GREASABLE BEARINGS

2-YEAR WARRANTY

FOR CONSUMERS

LAWN ROLLERS



	MLR36	MLR48 / MLR3P48
AERATION WIDTH	36"	48"
OVERALL WIDTH	52"	64"
WATER CAPACITY	24 Gallons / 200 lbs	32 Gallons / 267 lbs
HITCH	No Pin Included	No Pin Included or 3-Point Hitch
WHEELS	410/350-4, 2-Ply with Greasable Ball Bearings (for transport only)	410/350-4, 2-Ply with Greasable Ball Bearings (for transport only)
TOWING SPEED	5 mph	5 mph
LENGTH	52"	52"
WIDTH	52"	80"
HEIGHT	24" on Wheel / 18.5" on Spike	24" on Wheel / 18.5" on Spike
SHIPPING WEIGHT	115 lbs	120 lbs



TRANSPORTING

Transport with wheels in down position, then when ready to begin rolling, simply rotate hitch over top of unit and hook to mower to begin lawn rolling.

Wheels are not for highway use. Not applicable for 3-point hitch models.

TRIMMASTER

If a lawnmower just won't cut it, Maxim's TrimMaster probably will! With the power of a lawnmower and the versatility of a string trimmer, you can get close to fence rows, trees, landscaping and other hard to reach areas.

Problem trimming areas disappear with the lightweight, simple to operate TrimMaster. Ease of operation, combined with the durability of all steel construction, make the TrimMaster a smart choice.



STEEL CONSTRUCTION



SIDE DISCHARGE SHIELD



HEAVY-DUTY CUTTING CORD

2-YEAR WARRANTY

FOR CONSUMERS



	MBWT5BN	MBWT5B
ENGINE	Briggs & Stratton 625 Series, 190cc	Briggs & Stratton Vanguard™, 205 cc
SHAFT	3/4"	3/4"
DISCHARGE SIDE	Side	N/A
CUTTING WIDTH	24"	24"
CUTTING HEIGHT	1-7/8" & 3-3/4"	1-7/8" & 3-3/4"
CUTTING CORD	.155" Diameter	.155" Diameter
HANDLES	1" - 14 Gauge Tubular Steel	1" - 14 Gauge Tubular Steel
GLIDE BOWL MATERIAL	Aluminum	Aluminum
WHEELS	16" Steel Ball Bearing	16" Steel Ball Bearing
LENGTH	45"	45"
WIDTH	25"	25"
HEIGHT	44"	44"
SHIPPING WEIGHT	95 lbs	95 lbs



LARGE, BALL-BEARING WHEELS

TrimMaster's wheels make maneuvering around trees, fences, hard to reach areas and obstacles a breeze.



20195 S. DIAMOND LAKE RD, SUITE 100
ROGERS, MN 55374

Call (800) 621-2789 or visit maximmfg.com to learn more.



Your Local Dealer

Maxim® reserves the right to change engineering, specifications and options at any time without notice or obligation. Information contained within was current at time of printing and may change with new product development. Contact Maxim® for more information. © 2018 Maxim® All rights reserved.

REV 02/18

Item # MAXIMLIT.MAX