

ELECTRO DOT SIGHT INSTRUCTIONS

Congratulations, you have purchased one of the finest dot sights available. Special features of ELECTRO-DOT SIGHT include:

- ◆Tubeless design with 33mm reflex lens aperture provides a wide field of view, suitable for rapid-firing or shooting of moving targets besides normal shooting.
- ◆Multi-Reticule (4 patterns) or Variable Dot (4 different sizes) are installed.
- ◆Parallax corrected and unlimited eye-relief.
- ◆Allen head screw type windage and elevation click adjustments, with locking screw (see diagram below).
- ◆Built-in mount (integrated rail) for standard bases, no need to rezero when remounting the dismounted sight.
- ◆Very light weight, shockproof.
- ◆Low power consumption for long battery life.

BATTERY:

Your Electro-Dot (E/D) sight is powered by one 3V lithium battery (CR2032 or equivalent). Should your reticle grow dim or not light, you will need to replace the battery. To install battery, unscrew battery cover and insert new battery +side up, and replace the cover.

MOUNTING:

Your E/D sight includes an integrated rail that fits standard, dovetailed bases. This is suitable for most applications. Because of unlimited eye-relief with the E/D sight, you should provide at least three inches of clearance between the end of LED & Mirror housing and your eye when shooting. Set the rail onto the base so that the rail claw align with the crosscut grooves. Work the claw into the base until the cross-bolt seats into the groove. Securely tighten the locking screw with a Allen wrench included in the E/D sight.


1.

ゼロイン:

レティクル（照準線）セクターノブを回して、好みのレティクル（照準線）を選び、強度をお好みでセットしてください。E/Dサイトを装着すれば、銃をしっかりと固定して支えることができ、50から100ヤード（またはメートル）離れたターゲットを狙うことができます。テスト射撃は、最高の調整の精度を得るために、射撃のための固定した構え、同型のカートリッジの使用という同条件において行なう事をお薦めします。一回のクリック調整により着弾点が1 MOA（およそ100ヤード(約91M)先の1インチ(約2.54cm)、50ヤード先の0.5インチ）動きます。

スペック:

倍率	口径	視界	長さ
1倍	33mm	15.8m @ 100m	82mm

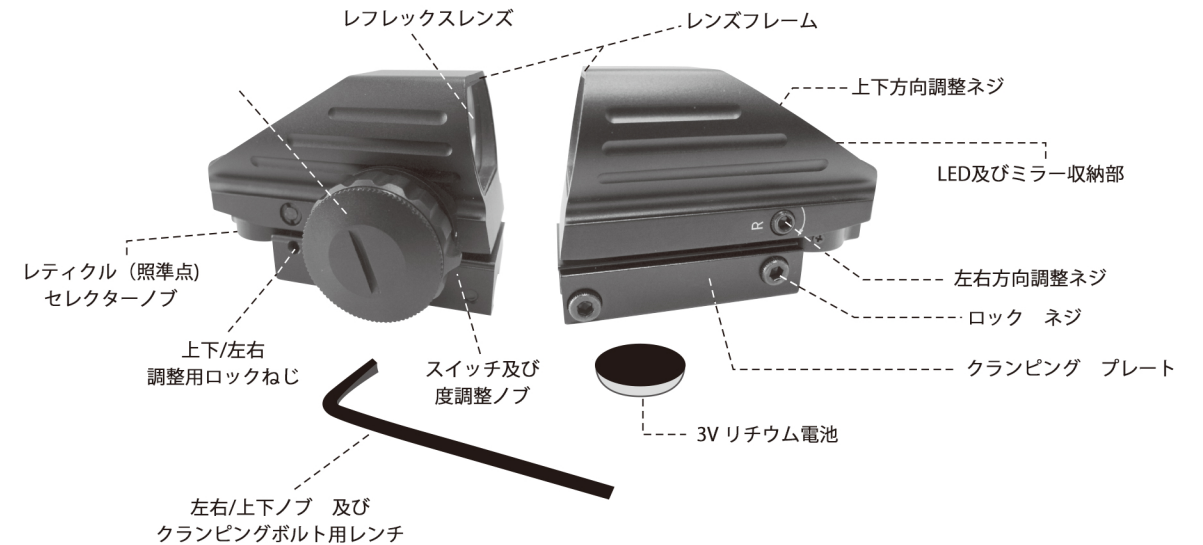

6.