

# PV-RC10FHD

## TV Remote Control 1080P Covert DVR


### Home Security Covert DVR with 3MP Camera



#### Feature

- Footage will be automatically saved when device runs out of battery
- 1080p PIR Covert DVR in TV remote design
- Smallest 3 mega pixels pin-hole camera made especially for recording use
- Overwrite function
- Full HD & HD recording resolution options
- PIR function for auto monitoring
- PIR function for video recording and photo shooting
- 1080P high definition video 1920X1080 at 30fps .avi format
- LED indicators for status review on installation,
  - 1) Green: battery charging
  - 2) Blue: power on / low battery
  - 3) Red: video recording / photo shooting
  - 4) Bright Green: Overwrite on

#### Product Sketch

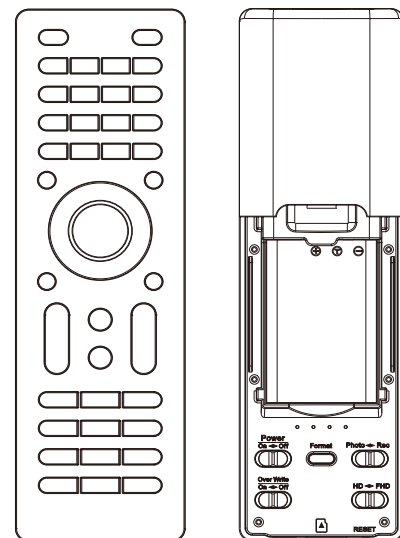

#### Specification

Built-in Camera Module	
Built-in image sensor	1/3" progressive CMOS sensor
Sensor resolution	2304x1536
Sensor sensitivity	3.3 Lux @ F 2.0
Lens F/No.	F 3.2
Focal Length	4mm
Angle of View	66°
Video Spec.	
Algorithm	H.264, JPEG
File Format	MOV, JPG
Video recording mode	Manual & Auto
Recording Capability	1920x1080 / 1280x720
Frame rate	Up to 30 fps
Photo Capability	5M
Storage & I/O	
Memory type	Micro SD Card ( Support SDHC max.32GB)
Data interface	Mini USB 2.0
Misc.	
Date/Time Table	YYYY/MM/DD, HH:MM:SS
Power	
Power Input	DC 5V
Power Consumption	250mA-390mA
Standby Consumption	About 6.4mA
Standby time	9 days
Battery Input	DC 3.7V / 1100mA polymers battery
Physical	
Dimension	17 x 5 x 1.5 cm
Weight	110 g

#### Standard Accessories

BA-PV900



3.7V/1100 mA Lithium Batt.



Micro SD Card

S-USB/MICRO USB



USB Cable

\*Specifications are subject to change without prior notice.

# LawMate

LawMate International Law Enforcement & Security Products Manufacturer

Web: [www.lawmate.com](http://www.lawmate.com)

Email: [sales@lawmate.com](mailto:sales@lawmate.com)

TEL: +886 2 8797-5728

FAX: +886 2 8797-5727