


TOP VIEW

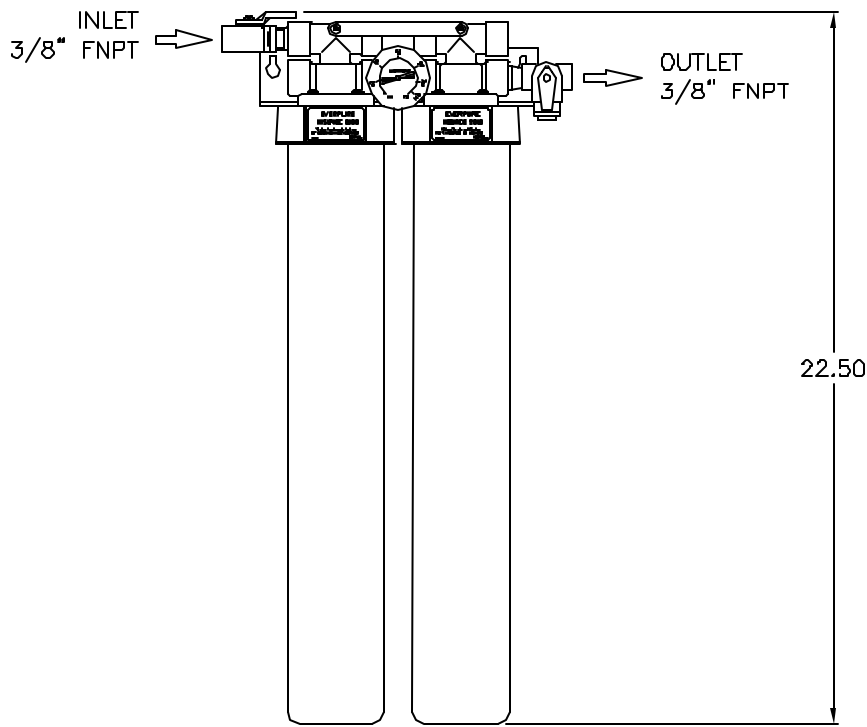

FRONT VIEW

INSURICE 2000 TWIN


PART NO. EV9324-02
 REPL. CART. (1 PK) EV9612-21
 REPL. CART. (6 PK) EV9612-26

SYSTEM DETAILS

SHIPPING WEIGHT, LBS: 12
 OPERATING WEIGHT, LBS: 19
 MAX. FLOW RATE, GPM: 3.34
 MAX. WORKING PRESSURE, PSI: 125
 MAX. OPERATIONAL TEMP, °F: 100

NOTES:

- (1) ITEMS SHOWN IN BROKEN LINES TO BE FURNISHED BY OTHERS.
- (2) ALL DIMENSIONS ARE ± 1 INCH (25mm) AND SUBJECT TO CHANGE WITHOUT NOTICE.
- (3) ALLOW MINIMUM 2.5 INCHES BELOW SYSTEM FOR CARTRIDGE CHANGE.

DO NOT SCALE DRAWING TOLERANCES: ±1/8" UNLESS OTHERWISE NOTED				 ENGINEERED SYSTEMS NORTHBROOK, ILLINOIS <small>PRINT AND BILL OF MATERIAL ARE NOT TO BE USED WITHOUT THE WRITTEN CONSENT OF CULLIBAN INTERNATIONAL CO.</small>		NAME INSURICE 2000 TWIN 0.5 MICRON PRE-COAT FILTER TECHNICAL DATA SHEET	
Rev.	Change	By	App			Date	DETAILED BY: KWR 8/17/02
						REF. NO.	PART NO. INSURICE_2000_2