

# ALPHA™

## Solar Flood Light



Our budget friendly Alpha Solar Flood Light can be used in garden, courtyards, Landscapes, Billboard as well as on building for extra parking lot light. You don't have to invest thousands of dollars over the next decade paying for the power to run it. Instead, that free renewable energy from the sun keeps your home or business lit and secure. No messy wiring into an electrical system, they are very easy to install that just about anyone can do it.

50% and remaining hours at 30% when motion is detected power turns to 100%.

- 130 Lumen per watt and IP67 rated
- PWM and MPPT Controller automatically track the maximum power point according to the weather verification.
- 3 Years limited warranty on all components
- Bracket Option: Yoke mount and Slip Fitter

- Adjusting the solar panel angle maximizes solar collection and allows snow to slide off
- The solar flood light has separate solar panel to collect the energy from sun.
- These flood light have smart controller that enables the power brightness, and lighting time to be adjusted via remote control.
- The light automatically switches on at dusk and switches off at dawn. Permanent lighting for first 4 hours at 100%, 4 hours at




**Pole Mount**



# ALPHA™ Solar Flood Light

## Specifications

| Model #           | SKU #  | Power | PV Type | Solar Panel | Lithium Battery | Lumens | CCT     | Controller | Beam Angle | IP Rating |
|-------------------|--------|-------|---------|-------------|-----------------|--------|---------|------------|------------|-----------|
| AVS-SFL15W - Yoke | 786500 | 15W   | MONO    | 45W         | 16AH            | 2200LM | 3K / 6K | PWM        | 140°       | IP67      |
| AVS-SFL20W - Yoke | 786600 | 20W   | MONO    | 60W         | 24AH            | 2800LM | 3K / 6K | PWM        | 140°       | IP67      |
| AVS-SFL30W - Yoke | 786700 | 30W   | MONO    | 80W         | 32AH            | 4200LM | 3K / 6K | MPPT       | 140°       | IP67      |
| AVS-SFL40W - Yoke | 786800 | 40W   | MONO    | 90W         | 40AH            | 5500LM | 3K / 6K | MPPT       | 140°       | IP67      |
| AVS-SFL50W - Yoke | 786900 | 50W   | MONO    | 100W        | 45AH            | 6200LM | 3K / 6K | MPPT       | 140°       | IP67      |
| AVS-SFL60W - Yoke | 786000 | 60W   | MONO    | 110W        | 53AH            | 7200LM | 3K / 6K | MPPT       | 140°       | IP67      |
| AVS-SFL15W - Pole | 786502 | 15W   | MONO    | 45W         | 16AH            | 2200LM | 3K / 6K | PWM        | 140°       | IP67      |
| AVS-SFL20W - Pole | 786602 | 20W   | MONO    | 60W         | 24AH            | 2800LM | 3K / 6K | PWM        | 140°       | IP67      |
| AVS-SFL30W - Pole | 786702 | 30W   | MONO    | 80W         | 32AH            | 4200LM | 3K / 6K | MPPT       | 140°       | IP67      |
| AVS-SFL40W - Pole | 786802 | 40W   | MONO    | 90W         | 40AH            | 5500LM | 3K / 6K | MPPT       | 140°       | IP67      |
| AVS-SFL50W - Pole | 786902 | 50W   | MONO    | 100W        | 45AH            | 6200LM | 3K / 6K | MPPT       | 140°       | IP67      |
| AVS-SFL60W - Pole | 786002 | 60W   | MONO    | 110W        | 53AH            | 7200LM | 3K / 6K | MPPT       | 140°       | IP67      |

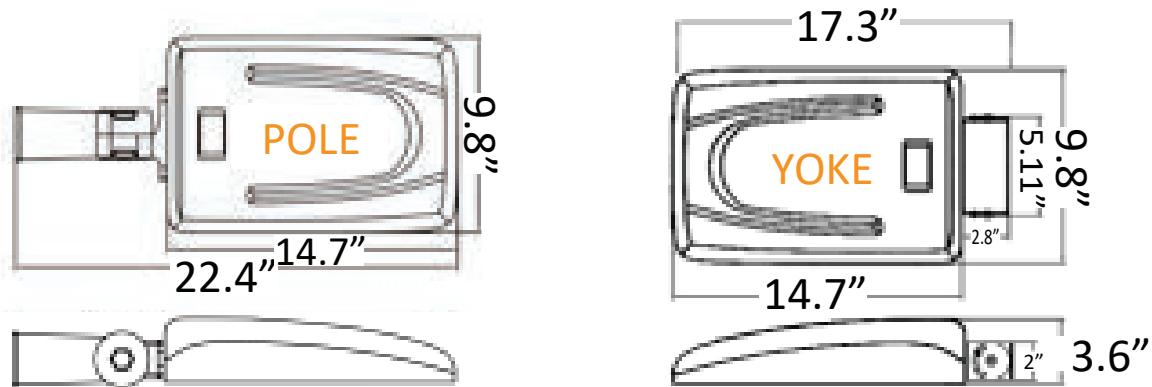

### Correlated Color Temperature

6000K

3000K



COOL WHITE

NATURAL WHITE

WARM WHITE



# ALPHA™ Solar Flood Light

## Product Design and Benefits

The Solar Billboard Light / Solar Sign Light uses 100% less power than traditional flood lights. The battery, solar controller, and sensor are built-in, and only need to be connected to an 18V panel via a MC4 plug. No other operations are needed, which allows for an easy and quick installation. Also, these lights have a smart controller that enables the power brightness, and lighting time to be adjusted via remote control.



### LED Power

This Solar Billboard Flood Light uses 72 pieces of Philips Lumileds 1W SMD3030 as a light source, the 72 pieces of LEDs are spread as 4 pieces in series connection and 18 pieces in parallel connection.



Solar Controller


Battery Pack



Motion Sensor



MC4 Plugs



Solar Cable



Remote Control



### PHOTOMETRIC SPECIFICATIONS

| Model No.     | AVS-SFL15W<br>- Pole                             | AVS-SFL20W<br>- Pole | AVS-SFL30W<br>- Pole | AVS-SFL40W<br>- Pole | AVS-SFL50W<br>- Pole | AVS-SFL60W<br>- Pole |
|---------------|--|----------------------|----------------------|----------------------|----------------------|----------------------|
| Wattage       | 15 W   | 20 W                 | 30 W                 | 40 W                 | 50 W                 | 60 W                 |
| LED No.       | 72 pcs of Philips Lumileds 1W SMD3030 - 6V 150mA |                      |                      |                      |                      |                      |
| Beam Angle    | 140° x 70°                                       |                      |                      |                      |                      |                      |
| Luminous flux | >2200 Lm   | >2800 Lm             | >4200 Lm             | >5500 Lm             | >6200 Lm             | >7200 Lm             |
| CCT           | 3000K / 6000K                                    |                      |                      |                      |                      |                      |
| CRI           | >82  |                      |                      |                      |                      |                      |



# ALPHA™ Solar Flood Light

## Product Structure

The Solar Sign Light has a streamlined design that is made of Aluminum Die Casting.





# ALPHA™ Solar Flood Light

## Operation

1. Use the MC4 connector to plug the light into the solar panel.
2. Press the button on the main body to switch to the ON position to make the light turn on automatically after sundown.

(the lighting mode was set by the factory before delivery)


3. The Solar Billboard Light / Solar Sign Light is now ready for use. You can also use the remote control to change the lighting modes or brightness.
4. Press the button into the OFF position then the light will stop working, or use the remote control to turn off the light.




**Solar Billboard Flood Light**

## Easy Installation

The Included Accessories are The Solar Billboard Light / Solar Sign Light, solar panel, and solar panel adapter bracket with screws.



**Solar Panel**



**Solar Panel Adapter Bracket With Screws**



1. Assemble the solar panel bracket with the screws



2. Attach the solar panel bracket to the solar panel



3. Connect the other side of the solar panel



4. Mount the solar panel on the desired surface



5. Attach the light into place for ideal lighting




# ALPHA™ Solar Flood Light







## Dimensions & Light Distribution



### Product Dimensions

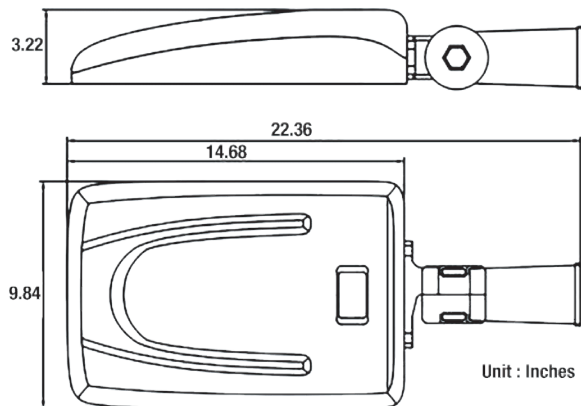

### Median Plane Light Distribution

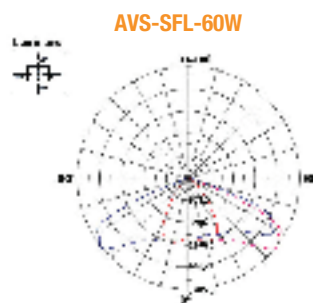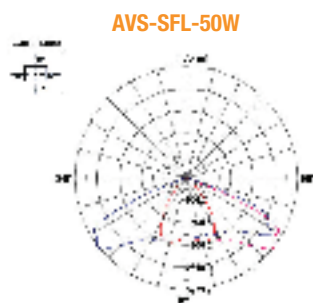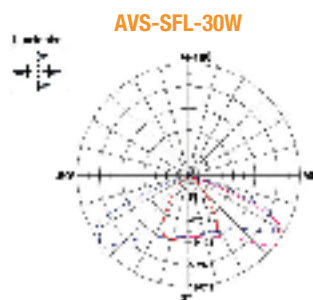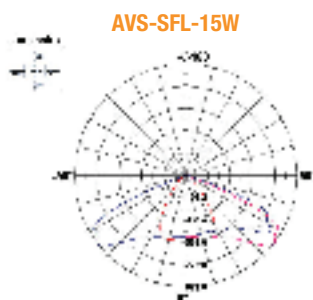

### MECHANICAL SPECIFICATIONS

| Model No.        | AVS-SFL15W - Pole                           | AVS-SFL20W - Pole | AVS-SFL30W - Pole | AVS-SFL40W - Pole | AVS-SFL50W - Pole | AVS-SFL60W - Pole |
|------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| Wattage          | 15 W  | 20 W              | 30 W              | 40 W              | 50 W              | 60 W              |
| Solar Connection | MC4 male & female plugs - 2.5mm² power cord |                   |                   |                   |                   |                   |
| IP Rating        | IP67 Waterproof                             |                   |                   |                   |                   |                   |



# ALPHA™

## Solar Flood Light


### Optimum Panel Orientation

The Solar charge in a battery pack won't last forever. The off-grid system relies on stored solar energy for autonomy. Angling your solar panels properly can boost the power intake of your solar lighting system. You want to angle your solar panels at a tilt based on the area's latitude.

#### Tip for Maximum Power

You can increase the tilt 15° in the winter or decrease 15° in the summer. In this way you can get the maximum sunlight to recharge the battery.

### Best Facing Direction of Solar Panel

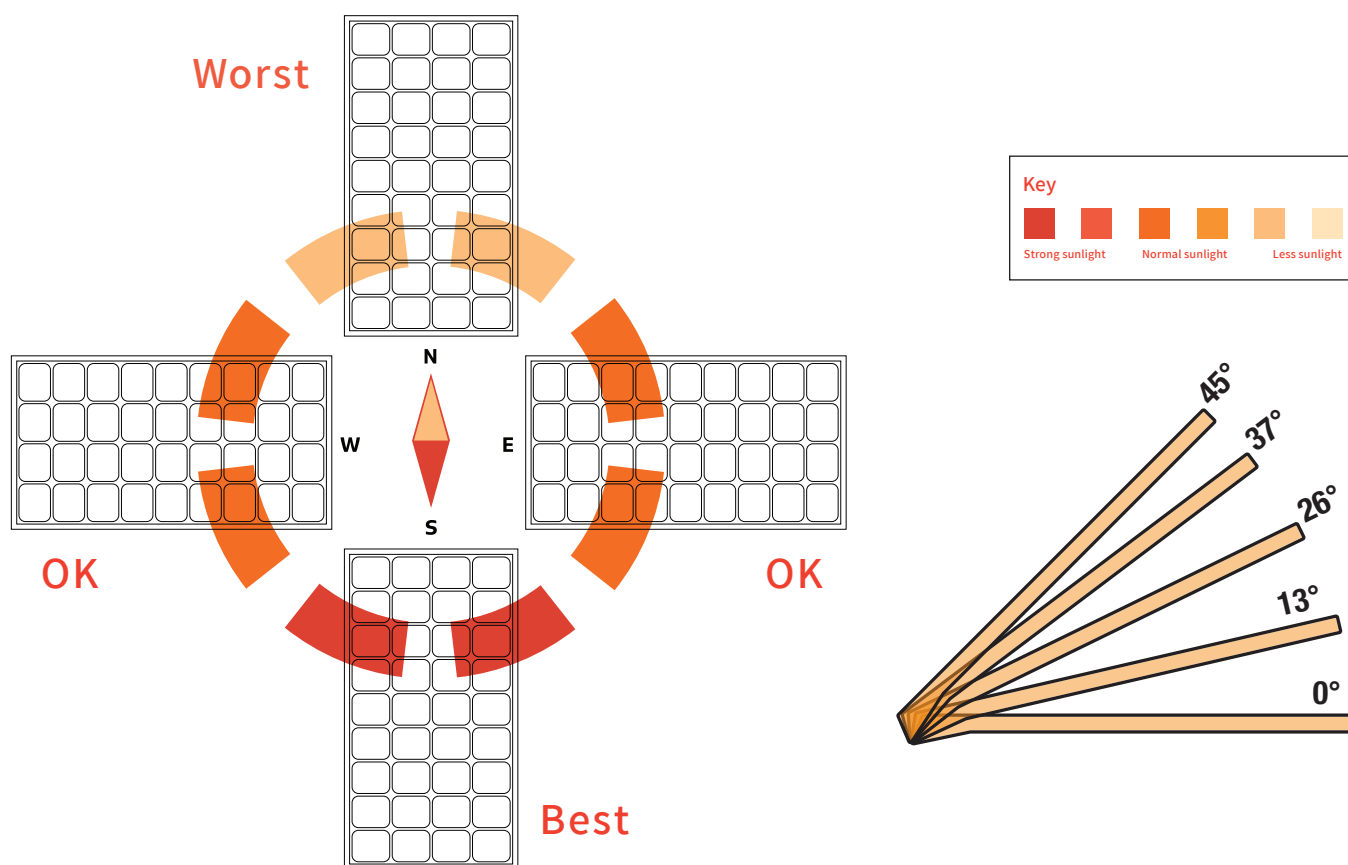


**The area will dictate the installation of the fixtures and will sometimes prevent the lights from facing south.** Panels facing West & East won't get as much light as Southern facing panels, but will still collect a good amount of sunlight. A North facing panel also works, but it will take longer to charge than any other direction. This would mean that the solar charge will be less optimal if installations are facing North.




# ALPHA™ Solar Flood Light

## Optimum Panel Orientation

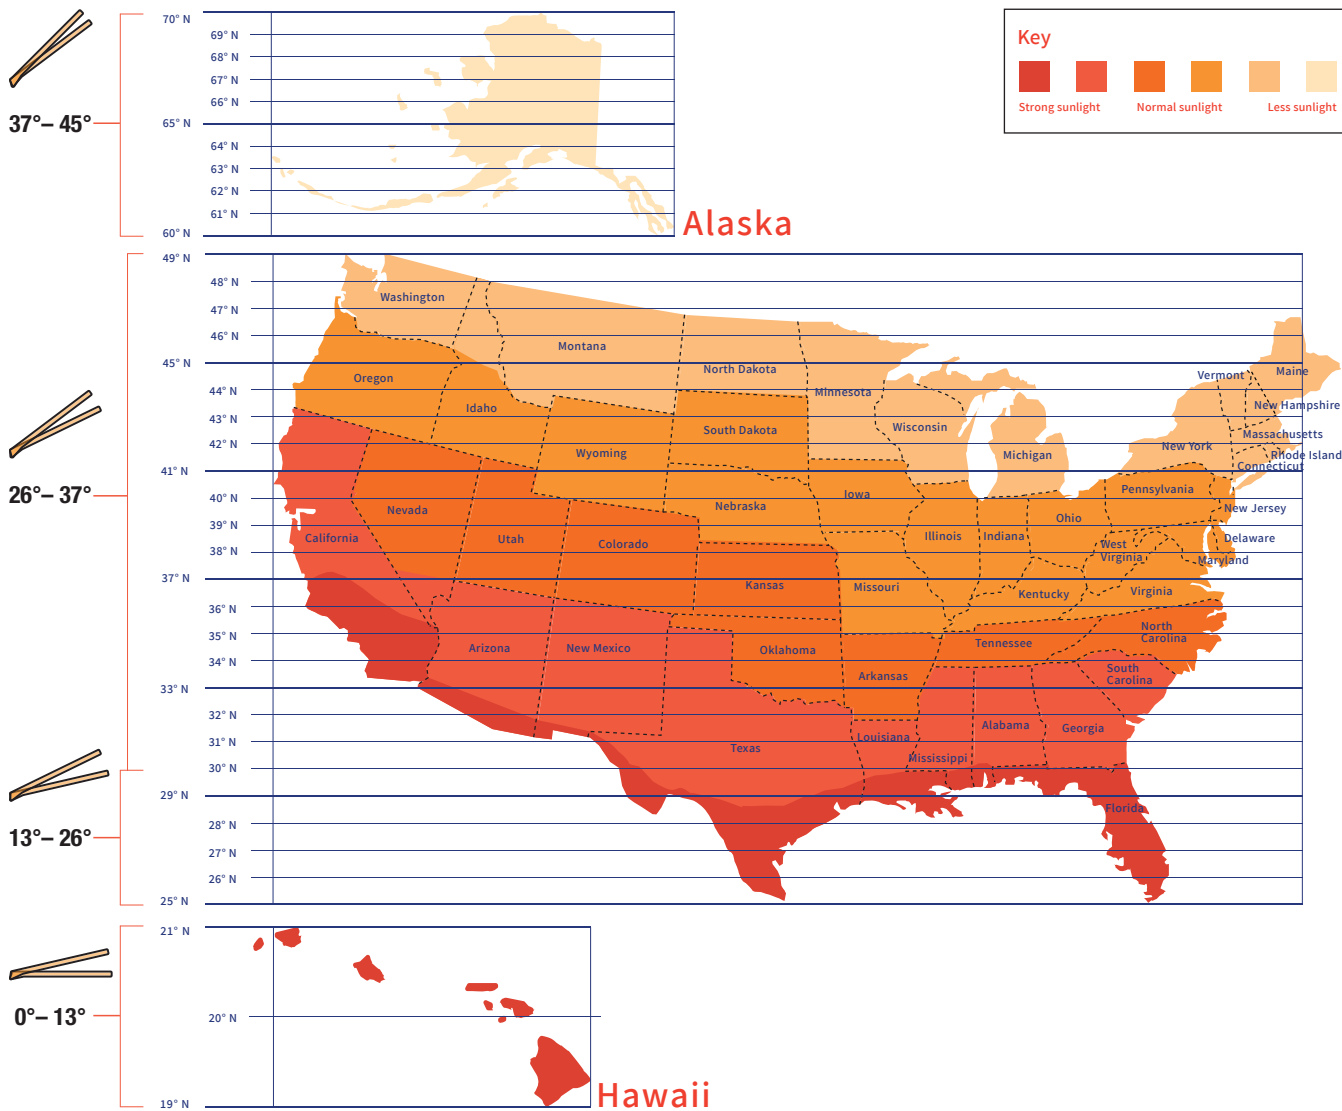

SOLAR FLOOD LIGHTS

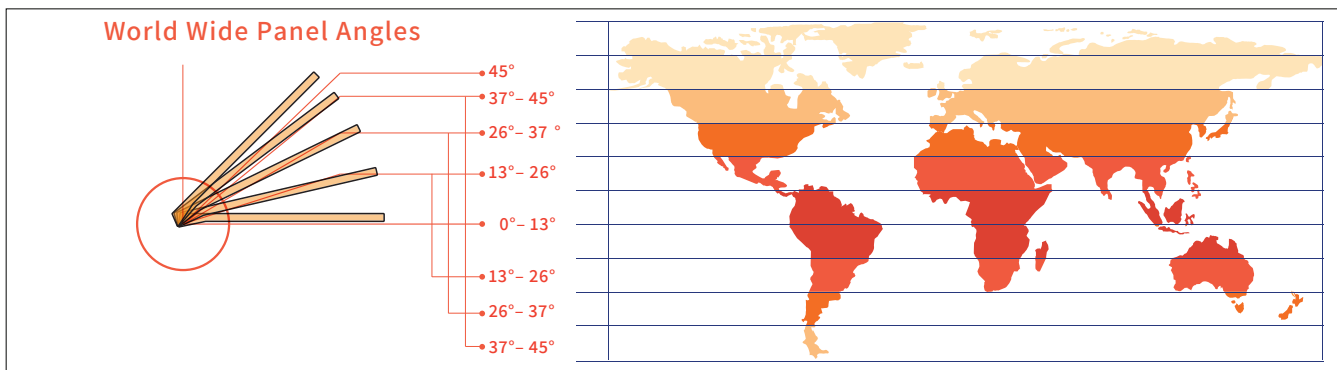



# ALPHA<sup>TM</sup> Solar Flood Light



#### ENERGY SAVING

Energy saving by 100% less power consumption than traditional flood light, endless power generated from solar.

#### HIGH LUMENS

Adopting 72pcs of Philips 1W SMD LED, driving by lower current, achieve more than 150lm/W as practical lumens output.

#### IP67 WATERPROOF

Designed based on water flow idea, with round corner, screws are sealed by rubber cover, fixtures are fixed tightly and properly, IP67 waterproof standard.

#### SOLAR CONNECTION

MC4 male & female plugs directly to 18V solar panel. quick and easy for connection. 2.5mm<sup>2</sup> power cord for less voltage drop.

#### COMPACT SYSTEM

Battery and solar controller, sensor are built-inside of light, only need to be connected to 18V system, NO more other operation, easy ,simple and quick installation.



## Troubleshooting



| Problem                   | Problem Cause  | Solutions   |
|---------------------------|--|---|
| Lamp doesn't work at all  | Light source is damaged  | Replace it with the same light source                                 |
|                           | The battery has run down   | Charging the battery  |
|                           | Light doesn't work in day time                                   | Changing the light setting with remote control                        |
| Battery can't get charged | Positive & negative of solar panel are connected conversely.     | Connect the positive & negative of solar panel to a correct position. |
|                           | Positive & negative of the solar panel are connected conversely. | Connect the positive & negative of solar panel to a correct position. |



# ALPHA™ Solar Flood Light

## Application



SOLAR FLOOD LIGHTS

