


# Lay Flat Discharge Hose (M) [KH-20]

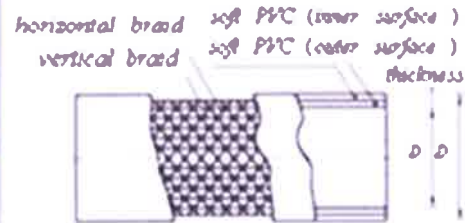

## Applications 用途

- High pressure water supply  
输送用
- Sprinkler  
洒水用
- Public works  
土木, 建设现场吸排水

## Features 特征

- Working pressure 2-7 kgf/cm<sup>2</sup>  
常用压力为 2-7 kgf/cm<sup>2</sup>
- Excellent mobility  
搬运方便
- Good pressure resistance  
耐压性极强

## Standard Specification 详细

Item No.	Nominal Size		Inner diameter (mm)	Thickness (mm)	Length (roll) (m)	Working Pressure (at 20°C) (kg/cm <sup>2</sup> )	B.P. (kg/cm <sup>2</sup> )
	(mm)	(inch)					
<b>KH20-25</b>	25	1"	26.5	1.70	50, 100	7	21
<b>KH20-32</b>	32	1-1/4"	33.5	1.70	50, 100	7	21
<b>KH20-38</b>	38	1-1/2"	40	1.80	50, 100	6	18
<b>KH20-50</b>	50	2"	52	2.00	50, 100	4.5	14
<b>KH20-65</b>	65	2-1/2"	65	2.00	50, 100	4	12
<b>KH20-75</b>	75	3"	77	2.20	50, 100	4	12
<b>KH20-100</b>	100	4"	103	2.20	50, 100	4	12
<b>KH20-125</b>	125	5"	128	2.20	50, 100	3	9
<b>KH20-150</b>	150	6"	153	2.30	50, 100	3	9
<b>KH20-200</b>	200	8"	207	2.50	50, 100	3	9
<b>KH20-250</b>	250	10"	256	2.40	50, 100	2	9
<b>KH20-300</b>	300	12"	303	2.70	50, 100	2	9

Order production is possible (可订造)\*