


Lay Flat Discharge Hose (H) [KH-FR40]

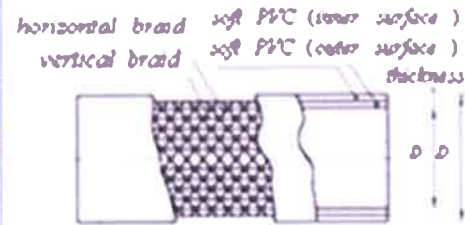

Applications 用途

- High pressure work
超高压用,吸排水
- Dam construction
消防,水壩用
- Public works
土木,建设现场吸排水

Features 特征

- Working pressure 6-11 kgf/cm²
常用压力为 6-11 kgf/cm²
- Excellent mobility
搬运方便
- High pressure resistance
耐压性极强
- High flame resistance
非常难烧

Standard Specification 详细

Item No.	Nominal Size		Inner diameter (mm)	Thickness (mm)	Length (roll) (m)	Working Pressure (at 20°C) (kg/cm ²)	B.P. (kg/cm ²)
	(mm)	(inch)					
KH40-40	40	1-1/2"	40	2.15	50, 100	10.5	30
KH40-50	50	2"	52.5	2.25	50, 100	10.5	21
KH40-65	65	2-1/2"	66	2.35	50, 100	10.5	21
KH40-75	75	3"	77	2.45	50, 100	10.5	18
KH40-100	100	4"	105	2.75	50, 100	8.5	18
KH40-125	125	5"	128	2.80	50, 100	8	15
KH40-150	150	6"	155	2.95	50, 100	8	15
KH40-200	200	8"	207	3.00	50, 100	6	15

Order production is possible (可訂造)*