




Fingerprint Trigger Lock

VIKING TRIGGER LOCK LLC
315 Bloomingburg Rd Middletown, NY 10940
www.vikingtriggerlock.com
(845) 231-2996

1.Product Description

Main equipment	Fingerprint Trigger Lock
Model No.	V1
Parts	USB Charge Cable
	Keys
	Fingerprint Setting Tool
	Product Instructions
Dimension	2.8*2.3*1.4in/71.2*59.5*36.5mm(L*W*H)
Net Weight	9.9oz/279.5g
Charging Socket	Micro USB
Fingerprint Sensor	10*10mm Capacitive
	Maximum 10 Fingerprint Profiles,
Fingerprint Storage	360 degree recognition,
&Sensor Capability	Smart learning
	(2 Administrators,8 Users)
Fingerprint Reading Speed	within 0.3 seconds
FAR(False Acceptance Rate)	<1/100000(0.002%)
FRR(False Rejection Rate)	<2%
Built in battery	250mAh Polymer lithium battery
Fingerprint sensor working current	20mA
Fingerprint sensor stand by current	2uA
ESD(Air discharge protection)	IEC61000-4-2,Level X,±8KV

2.Keys & Interface Function

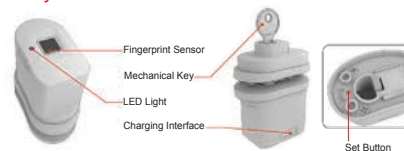


3.Administrator Fingerprint Setting

Remove the rubber cover from the bottom half of the lock. Underneath this cover you will see the set button



Step 1:Press "Set" Button for 1 second.

Step 2:The blue light will flash press the fingerprint sensor within 6 seconds,then release.

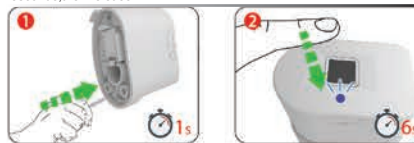


Step 3:Repeat step 2 six times,until the blue light remains on and holds for 2 seconds.
Step 4:If the red light appears and holds for 2 seconds,start the process again from Step 1.



4.User Fingerprint Setting

Step 1:Press "Set" Button for 1 second.

Step 2:The blue light will turn on.Scan the recorded Administrator fingerprint.With successful approval of Administrator's print,the blue light will flash.Next,press the sensor with your new fingerprint profile within 6 seconds,the release.

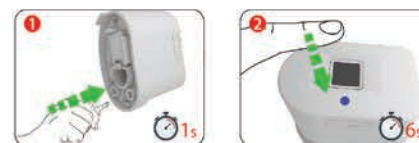

Visit www.vikingtriggerlock.com

Step 3:Repeat 6 times until the blue light remains on and lasts holds for 2 seconds.
Step 4:If red light appears and holds for 2 seconds,start the process again from Step 1.



Note:

- 1.Fingerprint Profile Setting mode will exit automatically after 6 seconds if there is no fingerprint read.
- 2.Fingers should be clean and dry to ensure correct reading.

5.Mechanical Key Unlock



The mechanical key can unlock the trigger lock in cases the built in battery has drained completely.

6.Fingerprint Unlock



Step 3:If successful,the green light will remain on and hold for 6 seconds with small indicating tones.You will be able to unlock within 6 seconds.
Step 4:The unlock will fail if the red light appears and holds for 2 seconds.



Note:

- 1.Fingerprint unlock mode will exit automatically after 6 seconds if there is no fingerprint registration action.
- 2.Fingers should be cdry and clean.

7.Recorded Fingerprint profile Deleting

Step 1:Press "Set" button for 7-8 seconds until the blue light is on and red light flashes asking for administrator fingerprint profile.

Step 2:The blue light will illuminate for 2 seconds when administrator's fingerprint has been read,then all enrolled profiles will be deleted.



Note:

When successful the green light will illuminate and last 2 second, if not the red light will illuminate for 2 seconds. If red light is on, user must restart from Step 1.



8.Charging The Battery

Step 1:If trigger lock is in low battery mode (battery level around 10%), the red light will flash for 3 seconds when you touch the sensor.It should be charged using the USB charge cable supplied.

9.Additional Information

1. The trigger lock can save a maximum of 10 fingerprints profiles-2 Administrators,8 Users.
2. The trigger lock can unlock approximately 1000 times and with 100% battery the standby time is around 5 months.We recommend charging it every 3 months.
3. Works with most self-defense and sporting firearms.

△ WARNING&DISCLAIMER

Always follow proper firearm safety procedures when operating or storing a firearm.Store firearms,ammunition and keys separately and securely, away from children and careless adults.While locking devices are an important aid to security measures,they are not a substitute for safe firearm handling and proper storage.Remember that any security device can be bypassed with enough time,knowledge,determination and equipment.

Always verify that your firearm is unloaded before installation,attempts to use this product on a loaded gun may result in accidental discharge. Prevent exposure to moisture and direct sunlight.The manufacturer expressly provides no guarantees against product malfunction in cases of, but not limited to:violence,fingerprint errors, moisture and extreme conditions.The manufacturer expressly reserves the right to interpret the meanings of the terms of this article.

While the product is designed to fit common models of handguns and rifles in the market,no representation is made that the product is compatible with all trigger designs.Please contact the seller regarding compatibility issues.

The buyer assumes all inherent risks of any injury to person or property resulting from the inherent dangers associated with firearm ownership, including but not limited to: accidental discharge,mechanical malfunctions,theft,tampering,exploding ammunition,criminal violations, and any and all other externalities.It is the responsibility of the buyer,not the seller,to ascertain and comply with all local,state,federal,and international laws regarding the possession,use,or sale of this product.