


RW9906


RW9906



RW9906

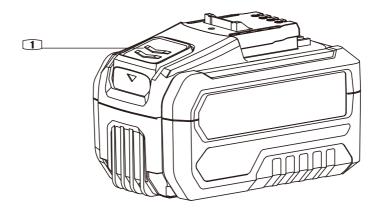





COMPONENT LIST

1 Battery Release Button

Not all the accessories illustrated or described are included in standard delivery.

We recommend that you purchase your accessories listed in the above list from the same store that sold you the tool. Refer to the accessory packaging for further details. Store personnel can assist you and offer advice.

Safety Warnings for battery pack

WARNING Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

Use battery pack for POSITEC cordless products only. Refer to the marking label and instruction manual provided with product.

Safety Warnings for battery pack

- a) Do not dismantle, open or shred cells or battery nack.
- b) Do not short-circuit a battery pack. Do not store battery packs haphazardly in a box or drawer where they may short-circuit each other or be

short-circuited by conductive materials. When battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screws or other small metal objects, that can make a connection from one terminal to another. Shorting the battery terminals together may cause burns or a fire

- c) Do not expose battery pack to heat or fire. Avoid storage in direct sunlight.
- d) Do not subject battery pack to mechanical shock.
- e) In the event of battery leaking, do not allow the liquid to come into contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.
- Seek medical advice immediately if a cell or battery pack has been swallowed.
- g) Keep battery pack clean and dry.
- Wipe the battery pack terminals with a clean dry cloth if they become dirty.

- Battery pack needs to be charged before use.
 Always refer to this instruction and use the correct charging procedure.
- Do not maintain battery pack on charge when not in use.
- k) After extended periods of storage, it may be necessary to charge and discharge the battery pack several times to obtain maximum performance.
- Battery pack gives its best performance when it is operated at normal room temperature (20 °C ± 5 °C).
- m) When disposing of battery packs, keep battery packs of different electrochemical systems separate from each other.
- n) Recharge only with the charger specified by POSITEC. Do not use any charger other than that specifically provided for use with the equipment. A charger that is suitable for one type of battery pack may create a risk of fire when used with another

- battery pack.
- Do not use any battery pack which is not designed for use with the equipment.
- p) Keep battery pack out of the reach of children.
- Retain the original product literature for future reference.
- r) Remove the battery from the equipment when not in use.
- s) Dispose of properly.

SYMBOLS



To reduce the risk of injury, user must read instruction manual





Li-lon battery. This product has been marked with a symbol relating to 'separate collection' for all battery packs and battery pack. It will then be recycled or dismantled in order to reduce the

impact on the environment. Battery packs can be hazardous for the environment and for human health since they contain hazardous substances.



Do not burn



Batteries may enter water cycle if disposed improperly, which can be hazardous for ecosystem. Do not dispose of waste batteries as unsorted municipal waste.



RCM marking

ABN: Australian Business Number. By this number, business information such as entity type, status, business location etc. can be found at website http://abr.business.gov.au.

ABN of Positec Australia Pty Ltd is 14 101 682 357

TECHNICAL DATA


Battery voltage:	18V
Battery capacity:	4.0 Ah
Battery Weight:	0.653 kg
Battery type:	Lithium-lon

Our battery only fits for charger RW9897.

WARNING! Remove the battery pack from the package and examine it carefully. Do not discard the carton or any packaging material until all parts have been examined

warning! If any part of the battery pack is missing or damaged, do not attach the battery pack to the tool until the part has been repaired or replaced. Failure to heed this warning could result serious injury.

OPERATION



Before attempting to use this tool, became familiar with all of its operating features and safety requirements. For optimum performance and safety, read the following operating instructions carefully before using.

WARNING! Do not allow familiarity with the battery to cause a lack of alertness. A fraction of a second of carelessness is enough to cause severe injury. Do not continue to press the On/Off Switch after the machine has been automatically switched off. The battery could be over-discharged.

Note:

Your battery pack is UNCHARGED. To ensure full
capacity of the battery, completely charge the battery in
the battery charger before using your power tool for the
first time.

- A battery pack will slowly lose its charge when kept out of the charger or left in an unplugged charger for a long time. It may need to be recharged before use.
- Charge the Lithium-Ion battery pack only with the correct charger.

The Li-lon battery is protected against deep discharging. When the battery is empty, the machine is switched off by means of a protective circuit: The tool no longer rotates. In a warm environment or after heavy use, the battery pack may become too hot to permit charging. Allow time for the battery to cool down before recharging. The Li-lon battery can be charged at any time without reducing its service life. Interrupting the charging procedure does not damage the battery.

Cold weather operation

When the battery pack is very cold, it may "pulse" for the first minute of use in order to warm itself. Put the battery pack on a tool and use the tool in a light application. After about a minute, the battery pack will have warmed itself and will operate normally.

How to charge the battery pack (See Fig. A1-A3)

CHARGING PROCEDURE

- Plug the charger into an appropriate outlet. The light will be green.
- Slide the battery pack into the charger, make sure the battery is in the correct charge position firmly. The light will turn to red to indicate the charging process has started.
- When charging is completed, the light will turn to green.
- After fully charged, unplug the charger and remove the battery pack.

Store the battery only within a temperature range between -10°C and 55°C (in one month). As an example, do not leave the battery in the car in summer.

A significantly reduced working period after charging indicates that the battery is used and must be replaced.

Transport

The contained Li-lon batteries are subject to the dangerous goods legislation requirements. The user can transport the batteries by road without additional requirements.

Dispatch batteries only when the battery housing is undamaged. Pack up the batteries in such a manner that cannot move around in the packaging.

Maintenance and service

Occasionally clean the venting slots of the battery using a soft, clean and dry brush.

When the battery is no longer operative, please refer to an authorized after-sales service agent for POSITEC power tools.

EN

Troubleshooting

PROBLEM	POSSIBLE CAUSES	SOLUTIONS	
The battery pack does not work	It has discharged	Attach the battery pack to a charger	

POSITEC AUSTRALIA PTY LTD ABN 14 101 682 357

MADE IN PRC

