

OWNER'S MANUAL



DELUXE
SUKKAH


Thank you for purchasing the *National Sukkah Outlet DELUXE Sukkah*. This sukkah was manufactured from the most durable materials, yet very simple to construct. Please follow our step by step instructions to insure proper assembly.

Wishing you many happy Sukkos Holidays with your new Sukkah,

The National Sukkah Outlet





Please note: In situations of inclement weather or strong winds, we strongly suggest that your Sukkah be taken down or reinforced appropriately. See page 11 for complete warranty information.

DIAGRAM OF PARTS

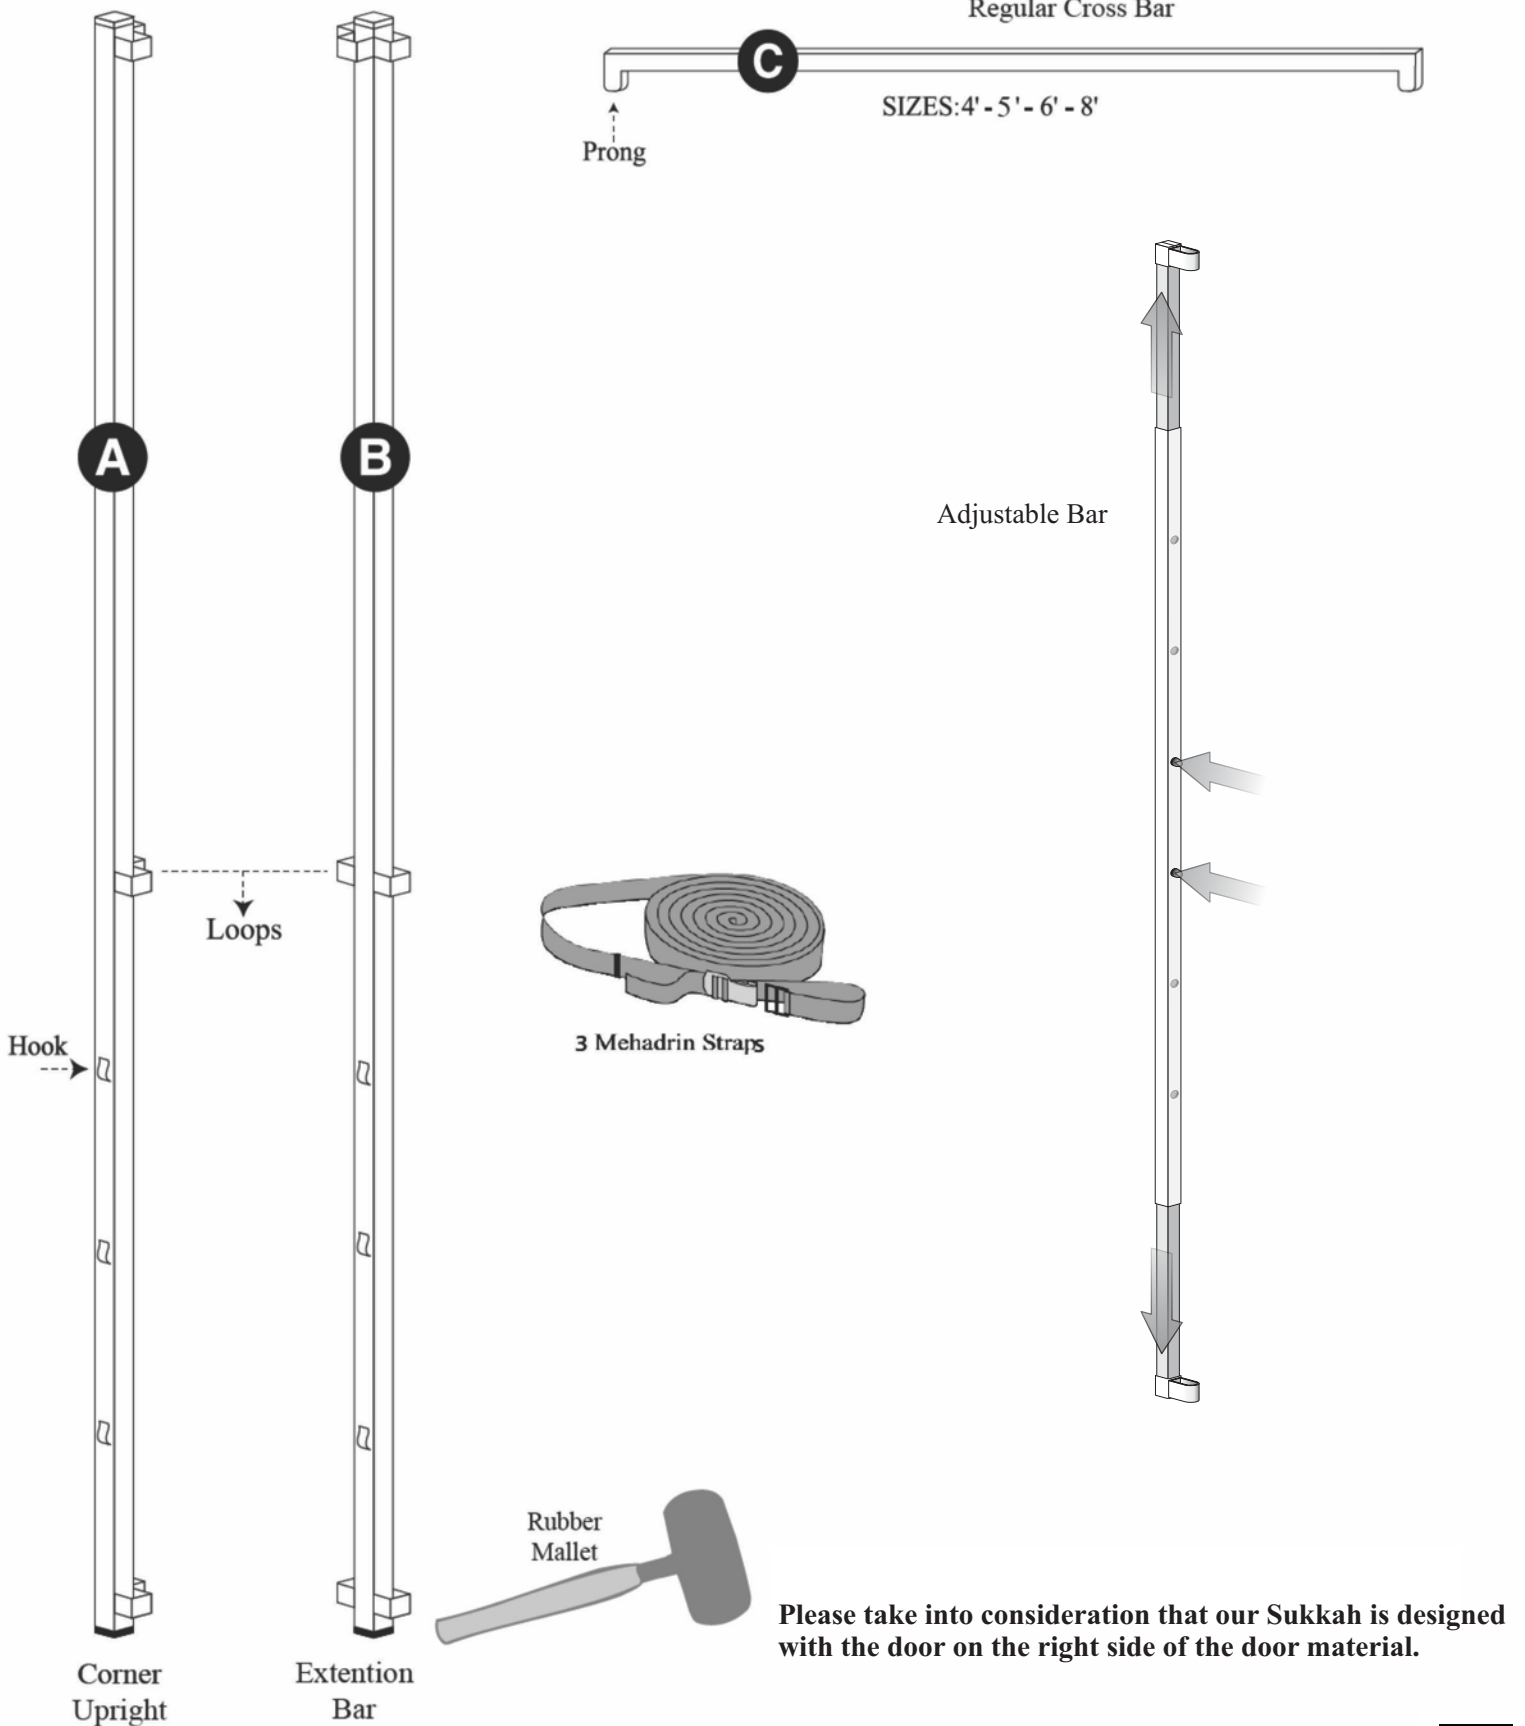

Please take into consideration that our Sukkah is designed with the door on the right side of the door material.

ASSEMBLY INSTRUCTIONS

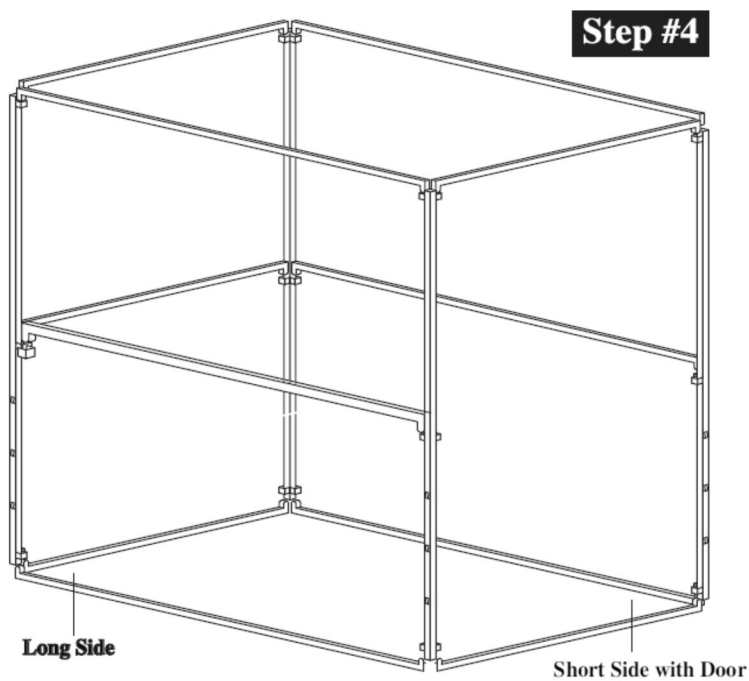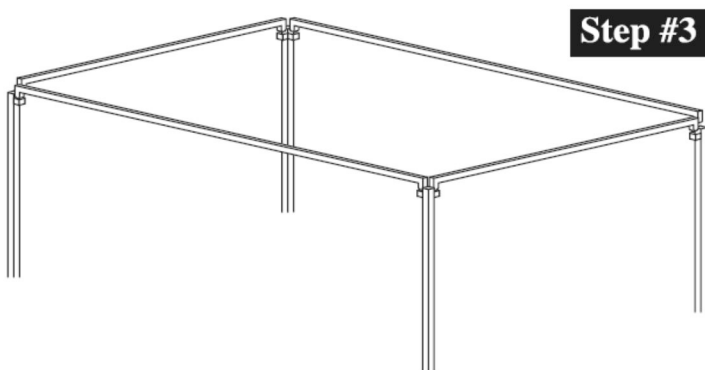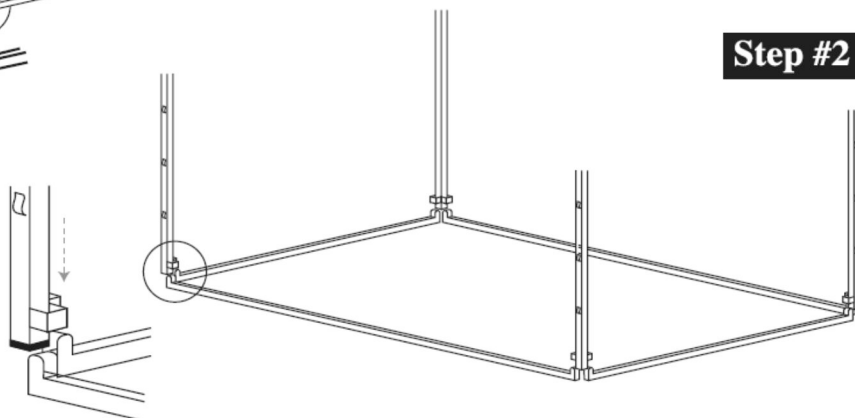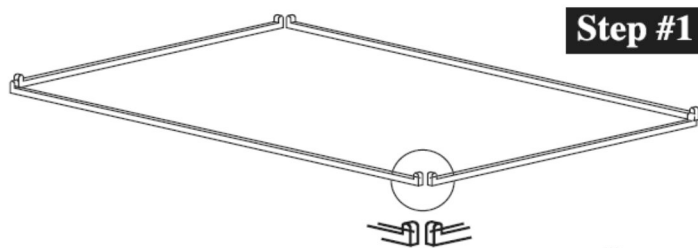

ASSEMBLY INSTRUCTIONS

FRAME ASSEMBLY:

8' x 10' (with 2 5' bars) through 12' x 24'

To prevent DAMAGE to your new DELUXE SUKKAH, we highly recommend:

Ensure that the prongs on the ends of the bars are fully inserted into their sockets

Complete steps 1 through 4, (building the entire frame all at once,) without leaving the frame standing incomplete.

Please Connect C-split bars before starting to build your Sukkah.

1. Lay out the base of your Sukkah using (C) crossbars, prongs facing upwards (see chart for bar sizes needed).
2. Insert loop of two corner bars (A) into prongs of crossbars (C) to connect the base of your Sukkah on one end as shown in Step #2. Be sure to completely push the socket down all the way.
3. Continue by inserting loops of extension bars (B) into prongs of crossbars (C) see step #3 – make sure the third socket on top of bar faces inside of the sukka as shown in Step #4. Insert the connecting bar on top of the Sukkah to connect the two extension bars (B) as shown in Step #4.


Note: For corner bars (A) & extension (B) bars white tips should be on top of bar; black tips should be on bottom of bar. The hooks for the straps should be on the bottom half.

4. Insert top crossbars (C) on width and length into top loops of upright bars(A), prongs facing downwards as shown in Step #4. **Tap with mallet to make sure it's firmly seated.**

Repeat Steps 1, 3, and 4 for the remaining section.

5. Insert center crossbars (C) into center loops of upright bars (A), and extension bar (B) prongs facing downwards as shown in Step #5.

NOTE: Door side (short side) does not get center crossbar.

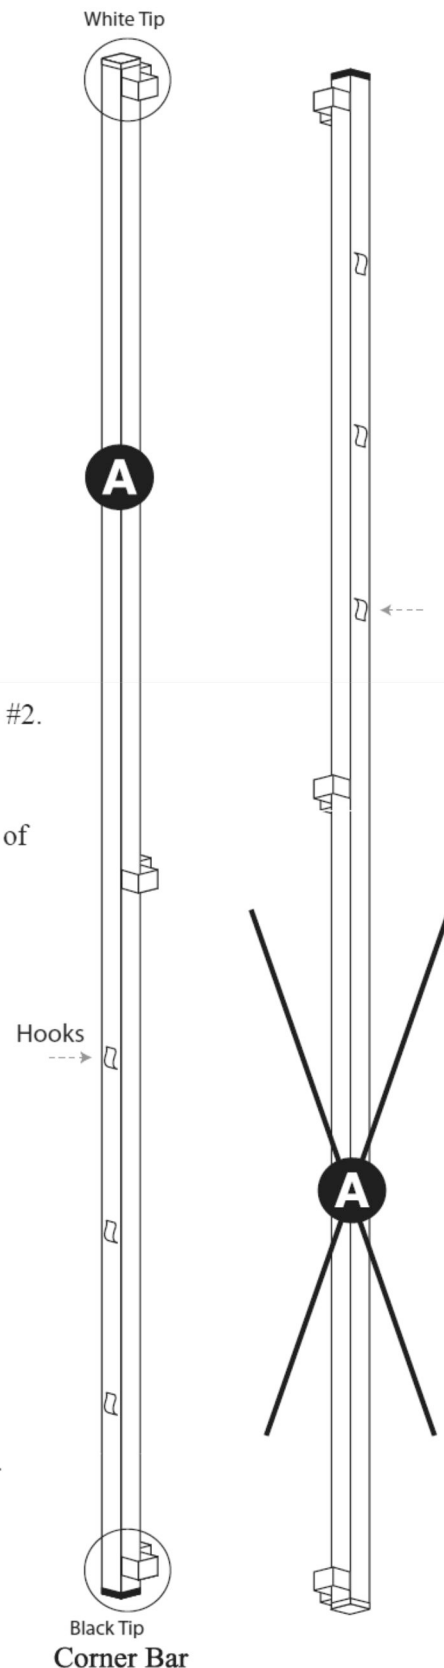

ASSEMBLY INSTRUCTIONS

FRAME ASSEMBLY:

8' x 10' thru 12' x 24'

8' wall – uses 1 – 8' bar

10' wall – uses 2 – 5' bars


12' wall – uses 2 – 6' bars

16' wall – uses 2 – 8' bars


20' wall – uses 2 – 6' bars + 1 – 8' bar

24' wall – uses 3 – 8' bars


Step #1

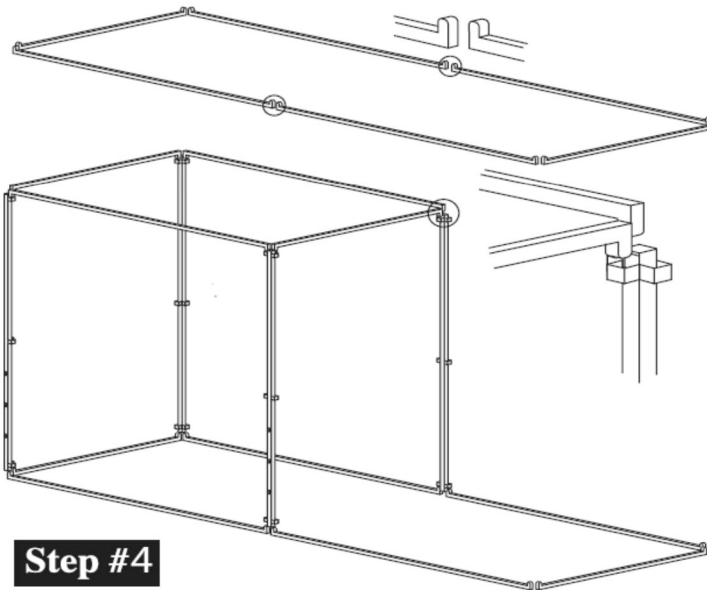


Step #4

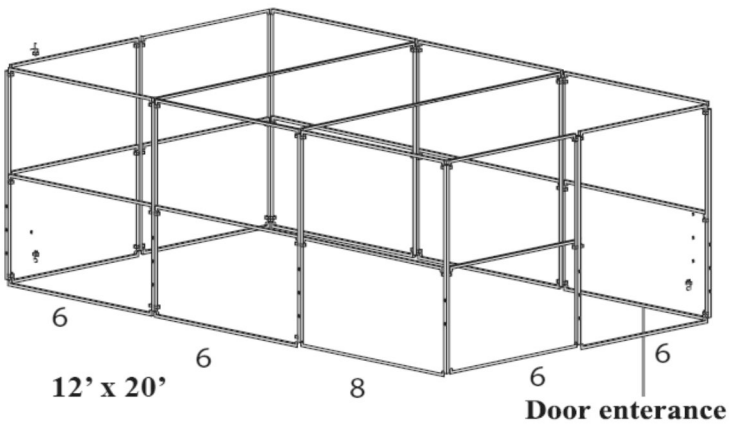


Step #2

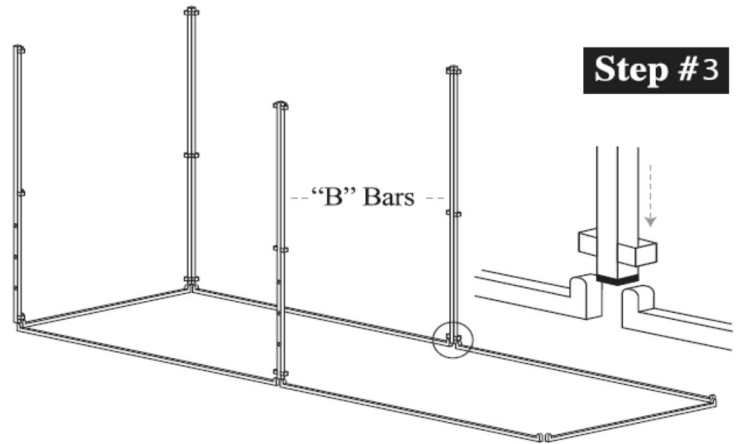

Step #3

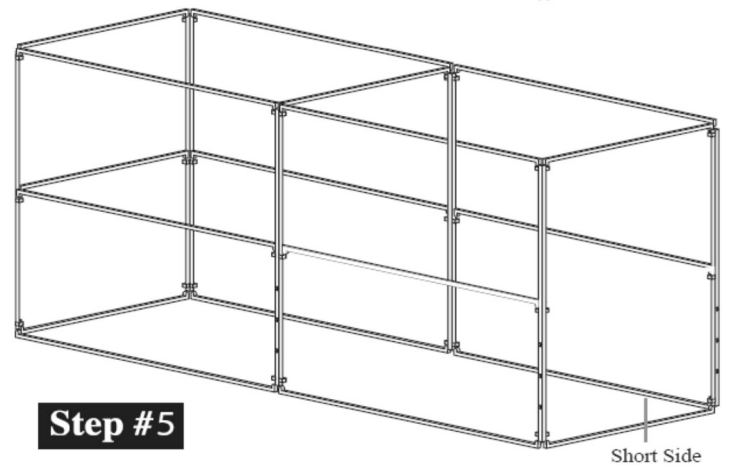






Step #5

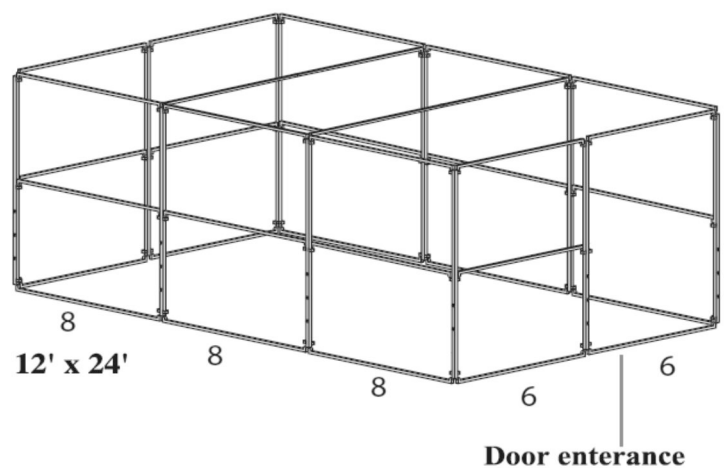

ASSEMBLY INSTRUCTIONS

MEHADRIN STRAPS ATTACHMENT:


1. Insert Straps into Hooks (on Corner Bars) starting on door side Corner Bar, continue around the 3 walls of Sukkah. (Door wall remains clear).
2. Stretch straps securely around the sukkah's three walls (for Halachic standards).
3. Repeat for all 3 Straps.

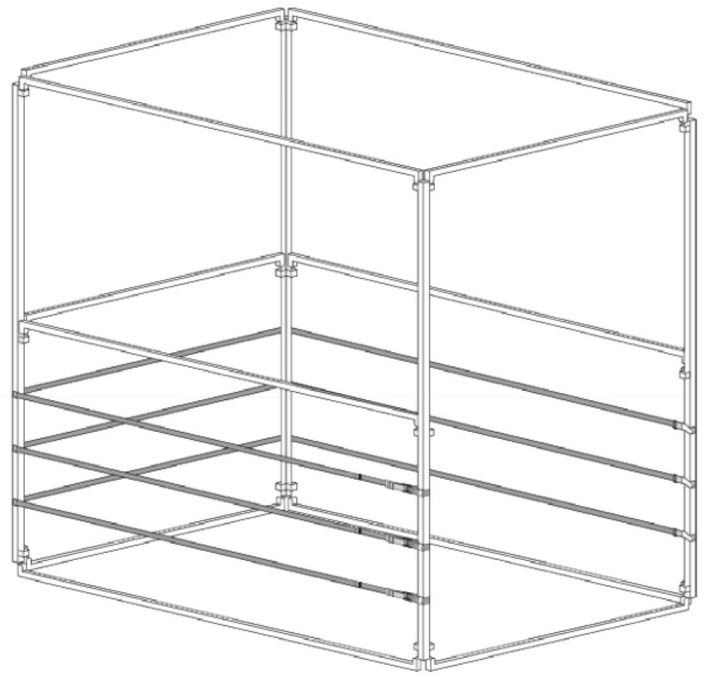


ASSEMBLY INSTRUCTIONS

FABRIC ATTACHMENT


- Step #1** Unfold the sukkah wall, and unfasten the Velcro that is on the upper section of the nylon wall.

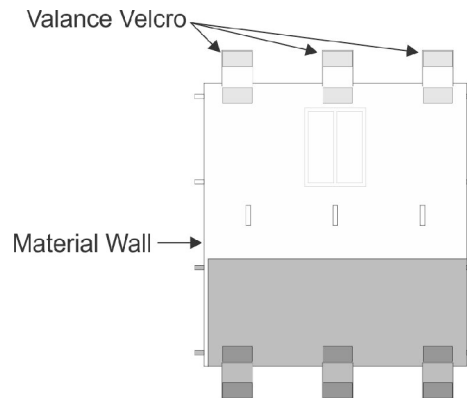


- Step #2** Standing inside the Sukkah, wrap the Velcro from outside, over the top bar (C) and fasten on the inside.

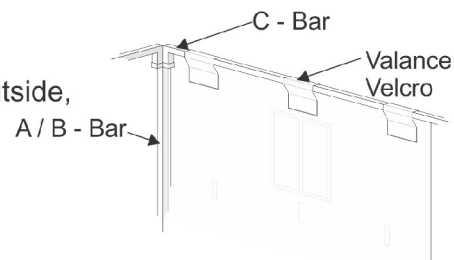

- Step #3** Wrap the Velcro straps along the bottom of the wall around the bottom horizontal bar (C), and fasten them.

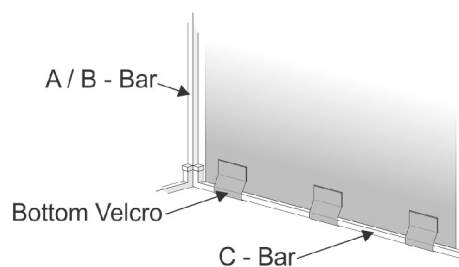


- Step #4** Wrap the Velcro straps along the edges of the nylon wall around the vertical corner/extension bars (A/B).

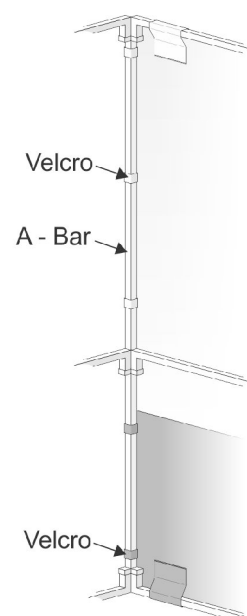


ASSEMBLY INSTRUCTIONS

Step #5 Secure the mid-height Velcro straps around the center crossbar (C). (if applicable)

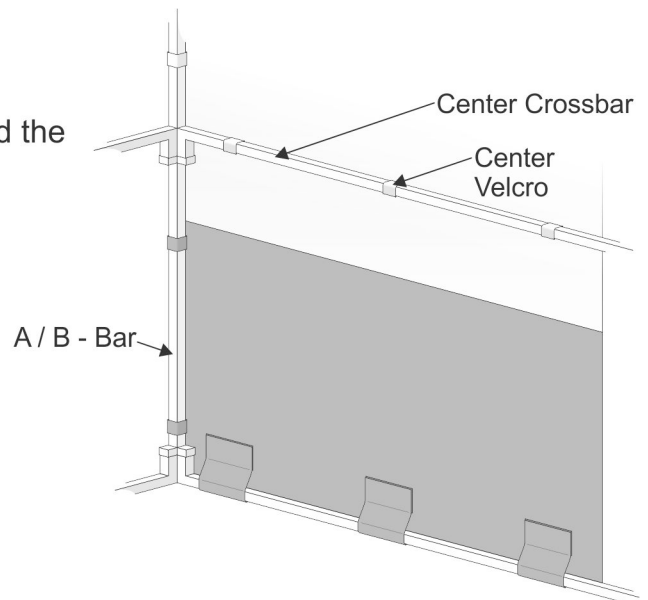

Step #6 Finally, secure the Velcro on the overlap on outside of the sukkah walls.

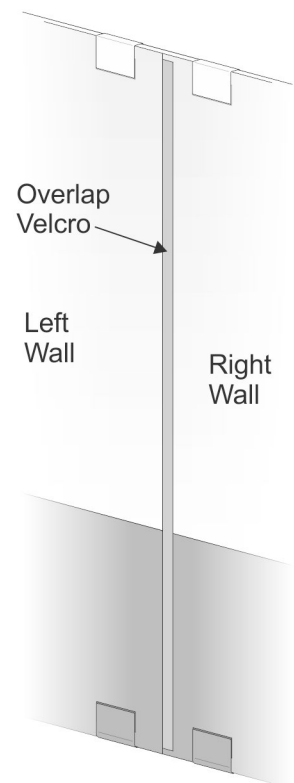

Step #7 Repeat until all walls are fastened to frame.


ASSEMBLY INSTRUCTIONS

MATS AND BAMBOO SCHACH INFORMATION

If you are using schach mat, lay it perpendicular to the supports and unroll it on the supports. We strongly recommend that you place additional pieces of wood on top of the mats to hold the schach mat down in the wind. These woods are not included in your Sukkah package. (You may purchase special mehadrin string to tie you mats down but please consult your Rabbi first).

If you are using bamboo poles for schach, place it perpendicular to the supports over the top of the Sukkah.

Do not hang any decorations from the mats. They are not designed to hold any weight. Decorations can be hung from the wooden supports or from bamboo poles.

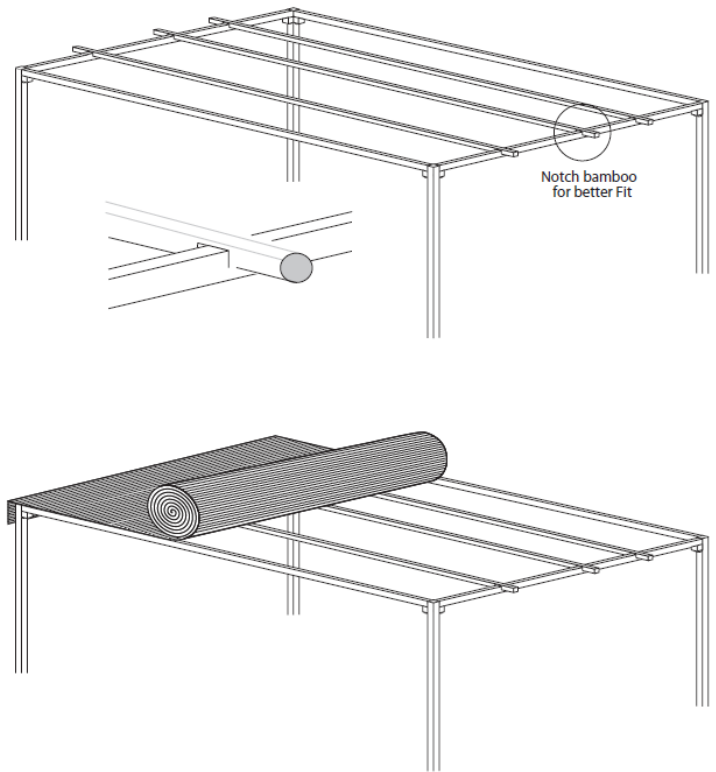

WARRANTY CERTIFICATE

National Sukkah Outlet hereby guarantees all parts and joints of its DELUXE Sukkah, for the period of twelve years.

A purchase receipt or other proof of date of original purchase will be required before warranty service is rendered.

This Warranty will be invalid in case of damage to bars or coatings, due to abuse, misuse, negligence, improper maintenance, or inclement weather. In situations of inclement weather, or strong winds we strongly suggest that your sukkah be taken down or reinforced appropriately.

National Sukkah Outlet



National Sukkah Outlet

www.sukkahoutlet.com

973.778.5624