



LED ARCHITECTURAL LINKABLE LINEAR - Y CONNECTOR LR42650, LR42651


IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions carefully before installation.
2. Installation should be in accordance with the national and local electrical laws and regulations.
3. Product should be installed by a qualified and licensed electrician.
4. DO NOT install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight and secure.
7. Fixtures should not be covered with thermal insulation pads or similar materials under any circumstance.
8. Do not touch the fixture if trial operation in case of danger.
9. DO NOT use outdoors.

BOX CONTENTS



CAUTION BEFORE INSTALLATION

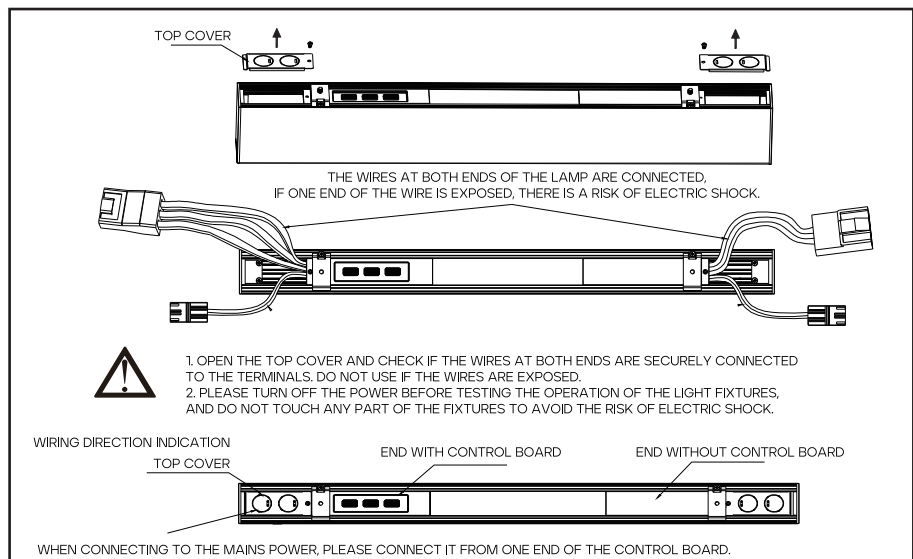


WARNING

1. IF ANY OTHER SHAPE IS NEEDED, PLEASE CONTACT THE MANUFACTURER TO CHECK. DO NOT INSTALL ACCORDING TO YOUR NEEDS WITHOUT AUTHORIZATION TO AVOID THE RISK OF ELECTRIC SHOCK.
2. WHEN SPliced FIXTURES ARE CONNECTED AS A WHOLE, THE NUMBER OF FIXTURES CONNECTED TO THE MAINS POWER IN A SINGLE CONNECTION CANNOT EXCEED THE NUMBER OF LAMPS LISTED IN THE TABLE BELOW:


Size	Wattage	110V	277V	347V
2'FT	≤ 25W	16 PCS	40 PCS	50 PCS
4'FT	≤ 50W	8 PCS	20 PCS	25 PCS
8'FT	≤ 80W	6 PCS	10 PCS	12 PCS
8'FT	≤ 100W	4 PCS	8 PCS	10 PCS

WIRING

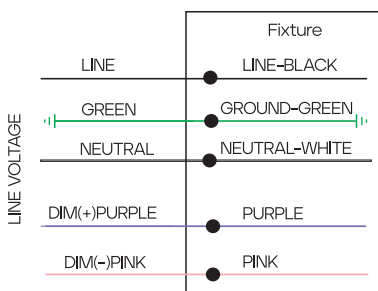


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.


1. Remove the cover from the "Y"joiner.

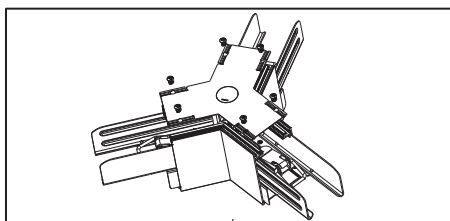


2. Remove the end cap and upper cover from fixture.

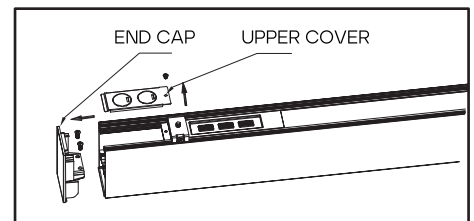

3. Slide the splicing bracket B into locating piece, then loci it with screws.

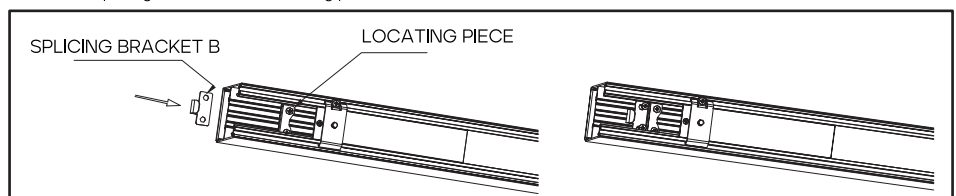


WIRING

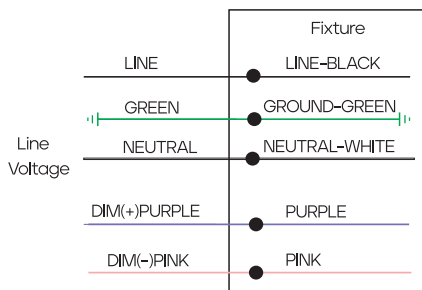


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation


4. Make the mounting marks on the ceiling for fixtures, please refer to pendant mounting instructions for suspending the fixture.

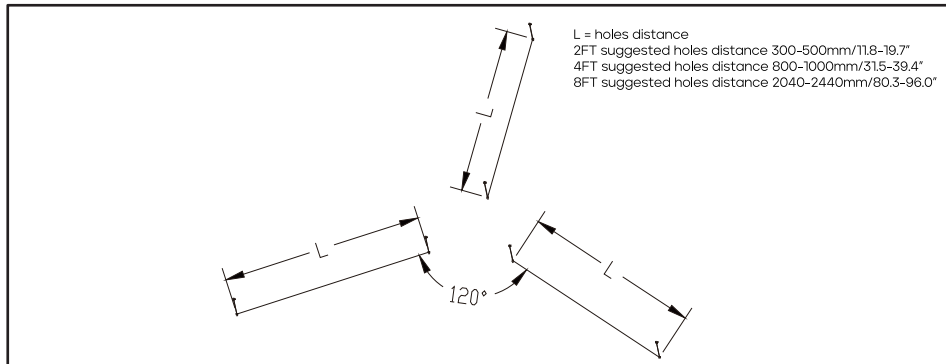


5. Adjust the lifting bracket in the fixture to a suitable position for suspending and linking.

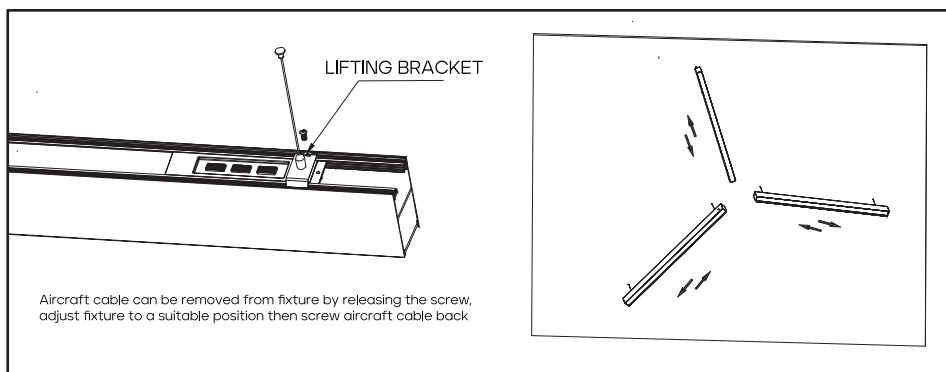


6. Insert the "Y" joiner into the fixture as shown below, and pull the lock buckle to splice fixtures

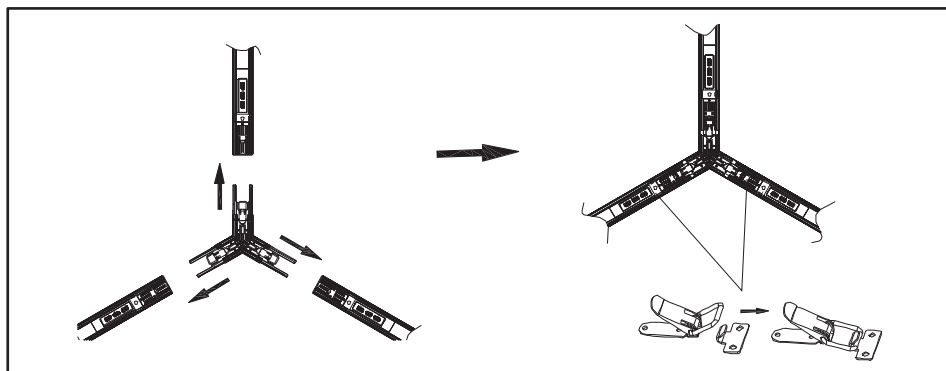

7. Make electrical connection of fixture and "Y"joiner with male-female connectors.

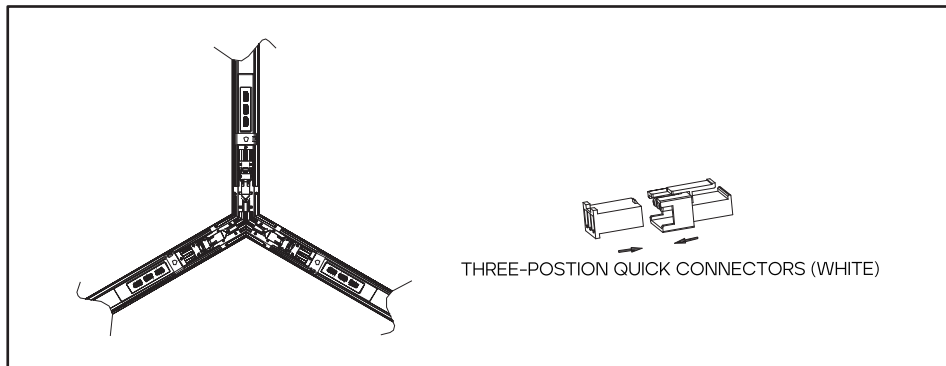


WIRING

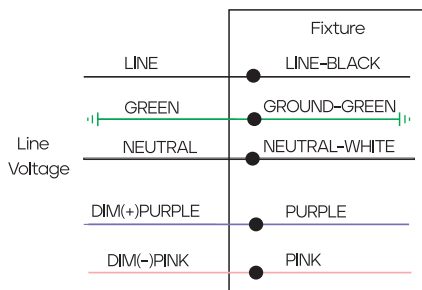


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation


8. Cut off the connectors in one of end for wiring to line voltage.

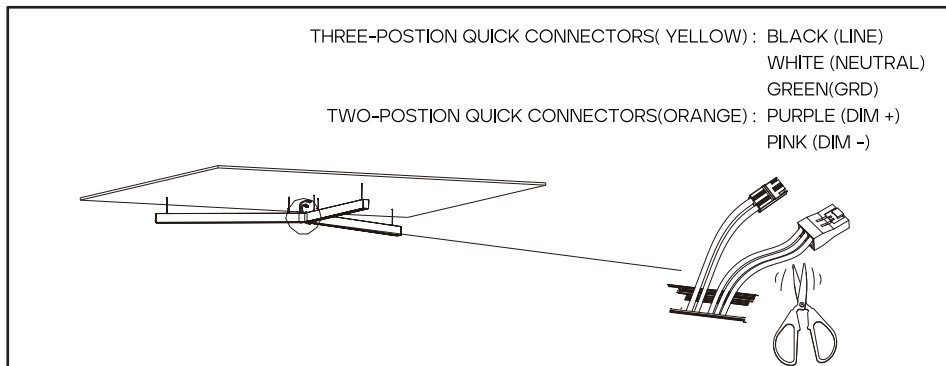


9. Screw back the cover of "Y"joiner, lock back the fixture upper cover, and Lock back the other end of fixture upper cover

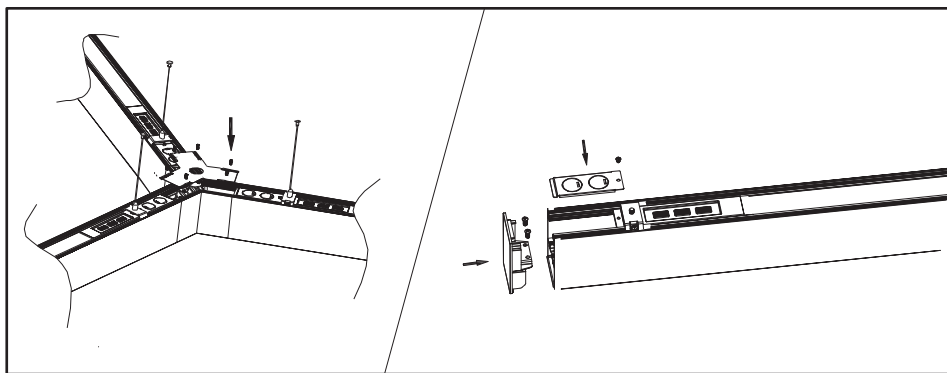


10. Make wiring according to diagram.

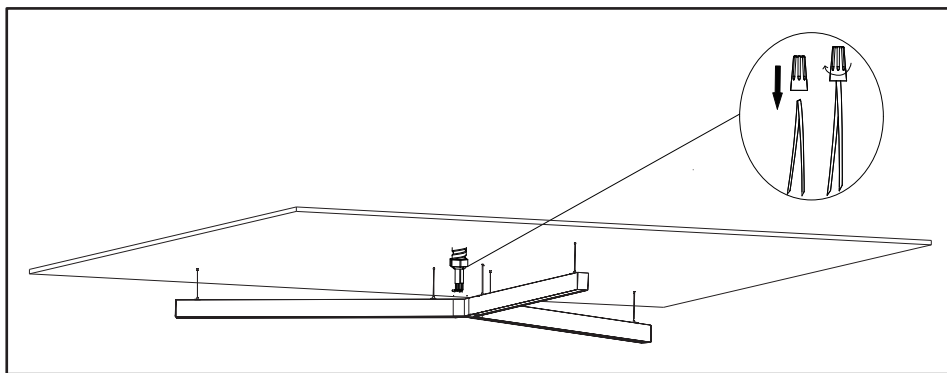

11. Installation completed

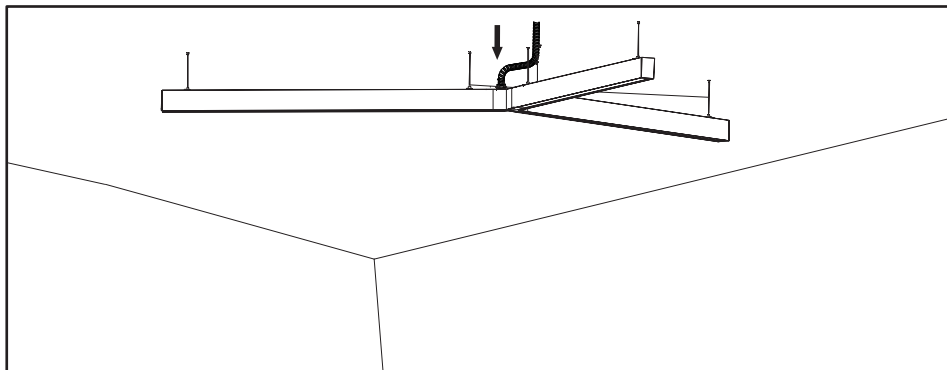


WIRING

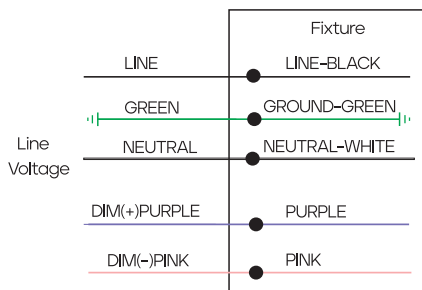


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation


1. Back to 6th step, before install T joiner, insert the ground wire into T joiner as shown in the following figure.

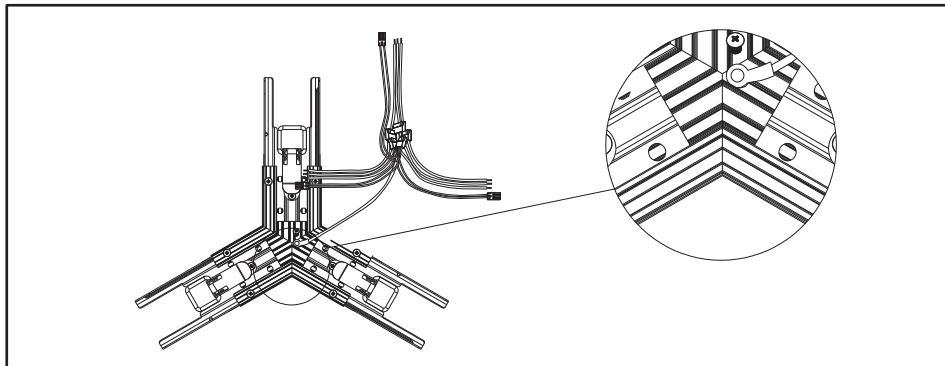


2. Insert the terminals according to the position of the fixture. Be sure to insert all wires into the opposite terminals to avoid the risk of electric shock when exposed.

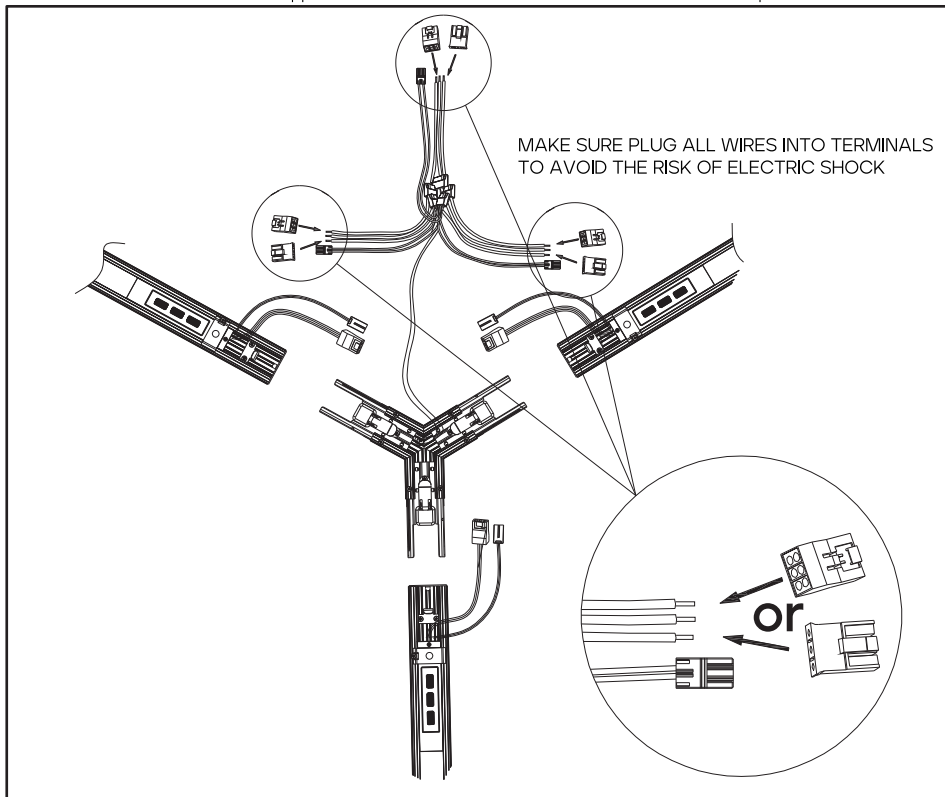


3-HEADS WIRE GROUP

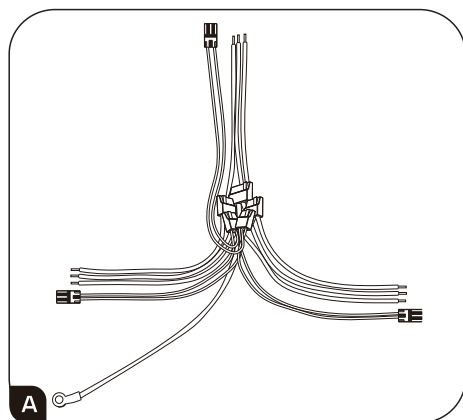

3-HEADS WIRE GROUP




TERMINAL




TERMINAL


3. Insert the splices into the lamp in sequence and lock them with locking buckles.

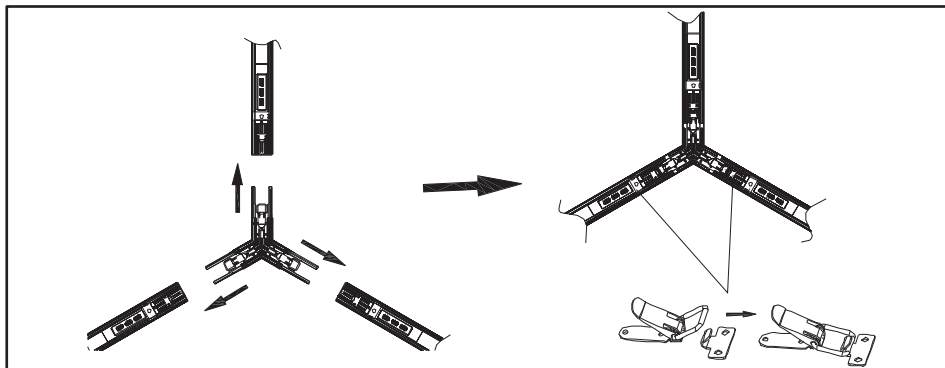

WIRING

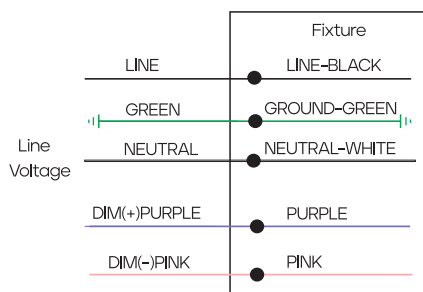


1. Back to the previous operation and insert terminals according to the requirements.

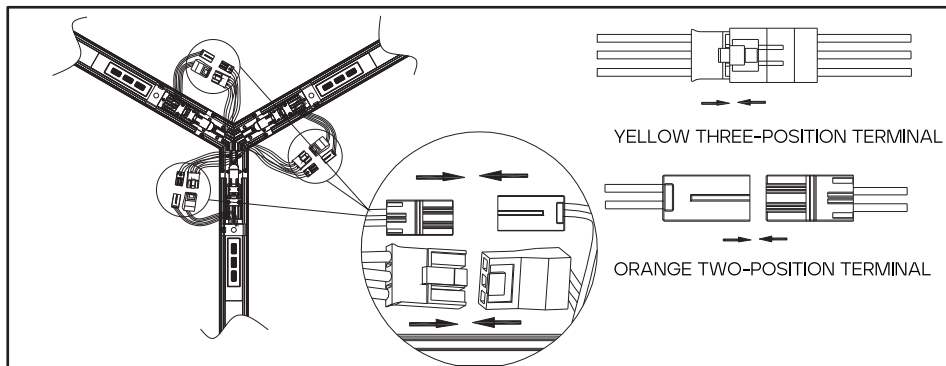


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation

2. please refer to pendant mounting for suspend the fixture.

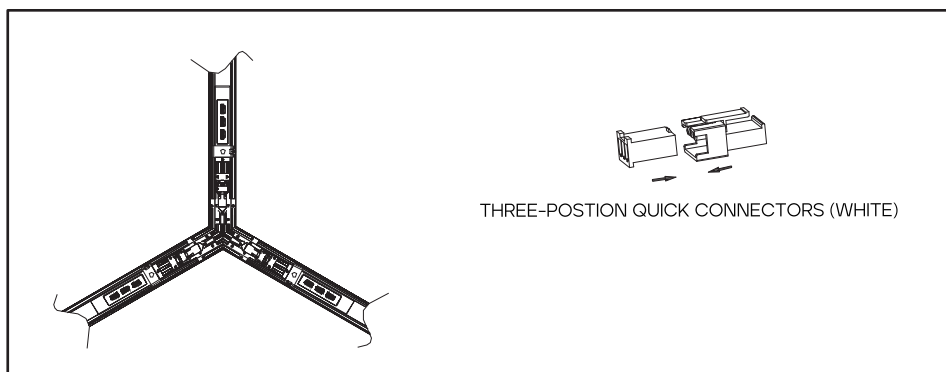

3. Cut off the connectors in one of end for wiring to line voltage

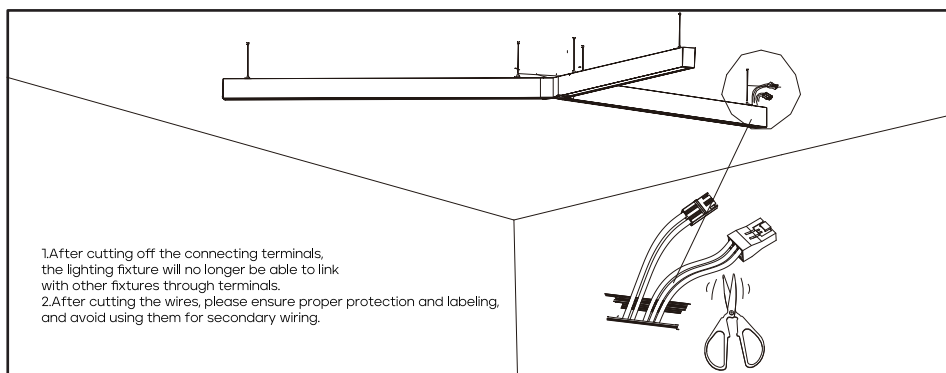

4. Make wiring according to diagram.

