


delta

Assembly video


Visit designbydelta.com/downloads



Single Bike Ceiling Hoist Pro With Straps

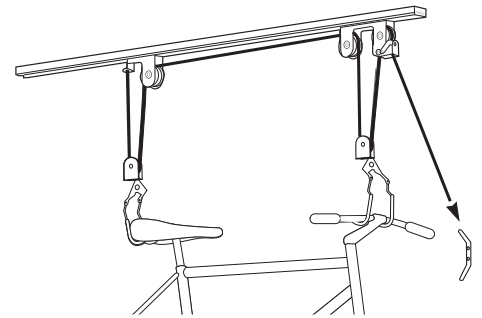

Assembly instructions RS2400

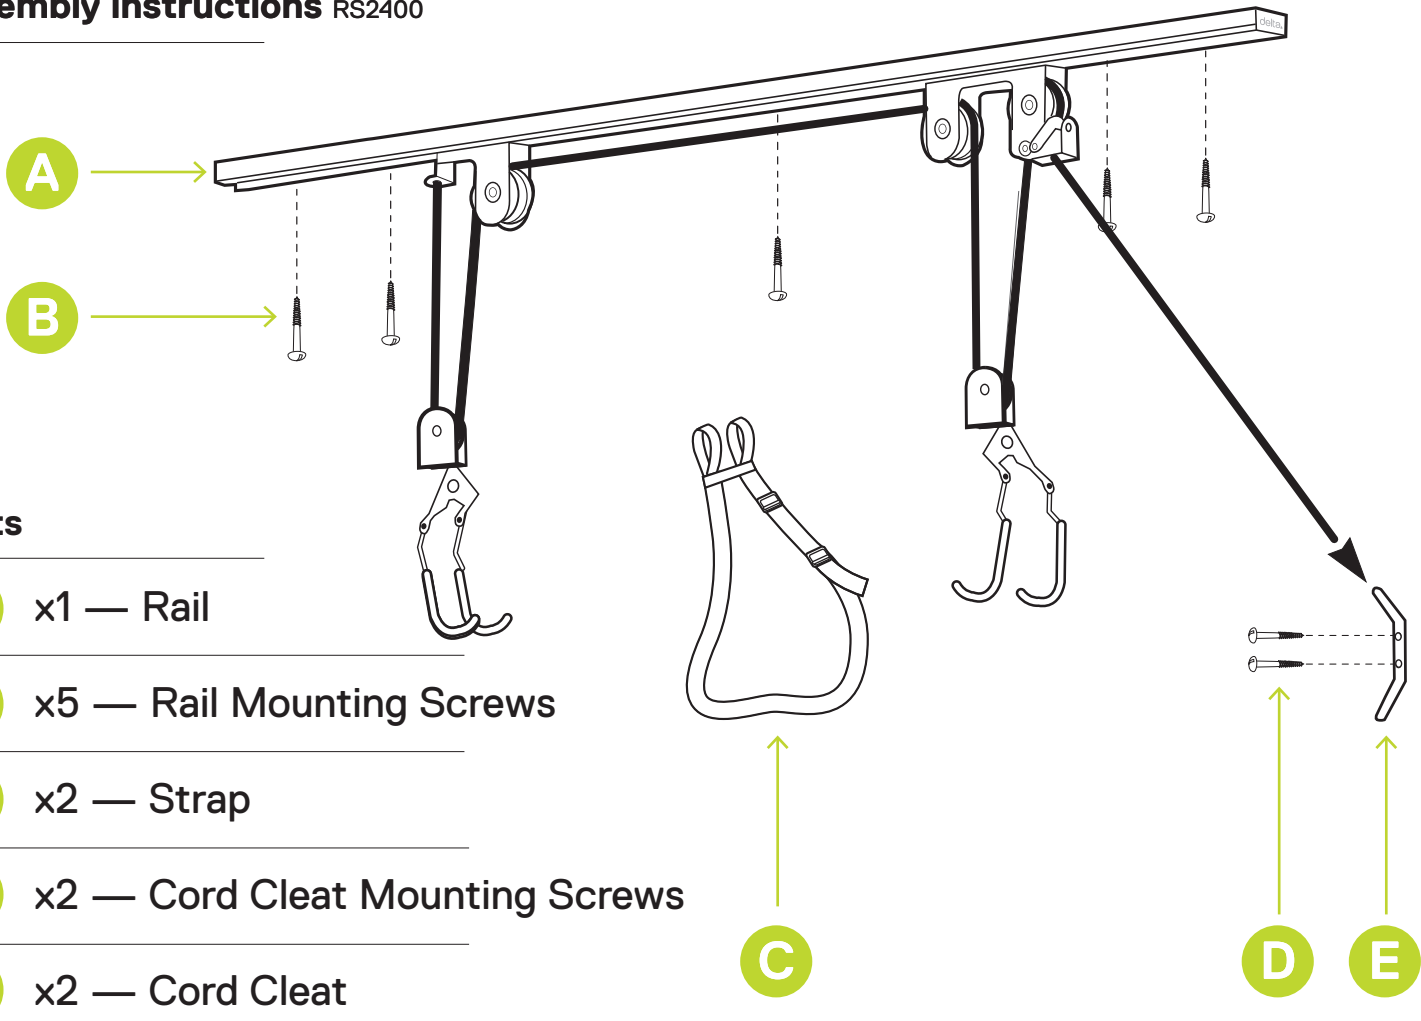

Parts


- A** x1 — Rail
- B** x5 — Rail Mounting Screws
- C** x2 — Strap
- D** x2 — Cord Cleat Mounting Screws
- E** x2 — Cord Cleat

Tool (s) Required

Phillips Head
Screwdriver



Drill



1/8" drill bit
(3mm)



Stud Locator



WARNING

NEVER EXCEED **MAXIMUM TOTAL WEIGHT LIMIT OF 100 LBS (46 Kgs)**. MAX CEILING HEIGHT: 12 FEET BEFORE USE THOROUGHLY TEST THE HOIST FULLY WEIGHTED WITH THE ITEM INTENDED TO BE STORED, ENSURING THE UNIT HAS BEEN INSTALLED SECURELY AND IS FUNCTIONING PROPERLY.

MAKE SURE THAT THERE ARE NO OBSTRUCTIONS TO RESTRICT OPERATION OF THE HOIST ASSEMBLY AS WELL AS THE HOISTED ITEM; FOR EXAMPLE: VEHICLES, GARAGE DOORS AND OTHER EQUIPMENT. DO NOT CUT THE CORD.

IMPORTANT IT IS RECOMMENDED THIS ITEM BE INSTALLED BY A COMPETENT PROFESSIONAL. IMPROPER INSTALLATION OR USE CAN RESULT IN PERSONAL INJURY AND/OR DAMAGE TO PROPERTY.

1

Using the stud finder locate the ceiling joist where the hoist will be placed. (Figure 1)



NOTE

It is also possible to mount the hoist horizontal to the joist using 3 of the mounting screws. (Figure 2)

2

Use a pencil to mark the holes where the screws will be inserted. Use a drill with a 1/8" bit to drill pilot holes for the mounting screws.

3

Using the screws provided mount the rail into the ceiling joist.



IMPORTANT NOTE

Ensure that all screws are securely mounted into the joist.

If you need to slide the pulleys out of the way during installation will first need to loosen the set screws. (Figure 3)

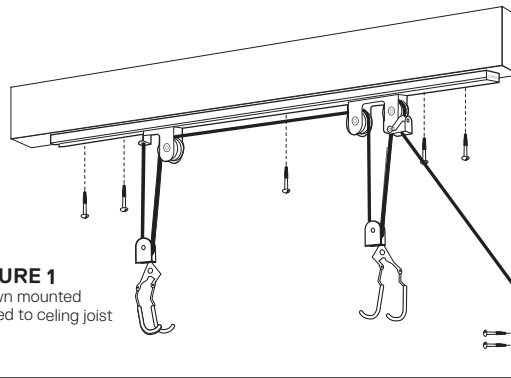


FIGURE 1
Shown mounted aligned to ceiling joist




FIGURE 3


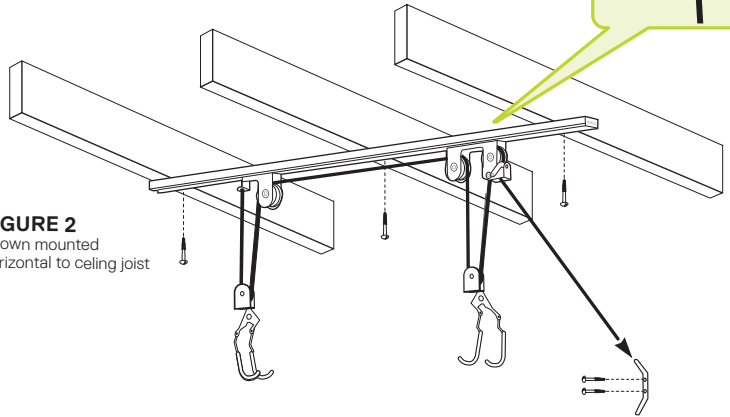


FIGURE 2
Shown mounted horizontal to ceiling joist


4

Set the pulleys to the correct width for your item by sliding them along the rail. To secure the pulleys tighten the set screws.

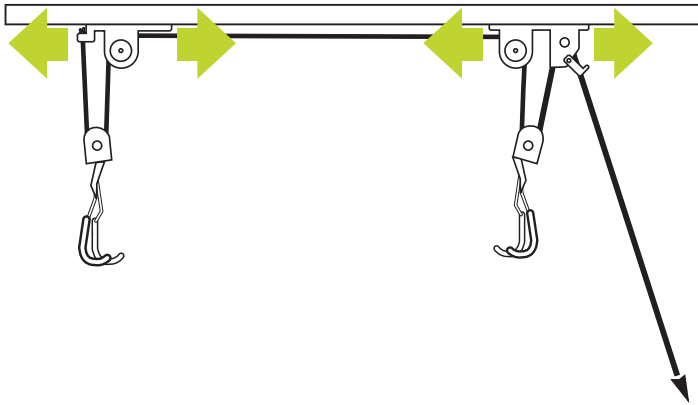

5

Mount the cord cleat at a safe height out of reach of small children and screw directly into a stud using two wood screws supplied. When your item is raised to the desired height, the excess rope should be stored around the cleat. **DO NOT CUT EXCESS CORD.**

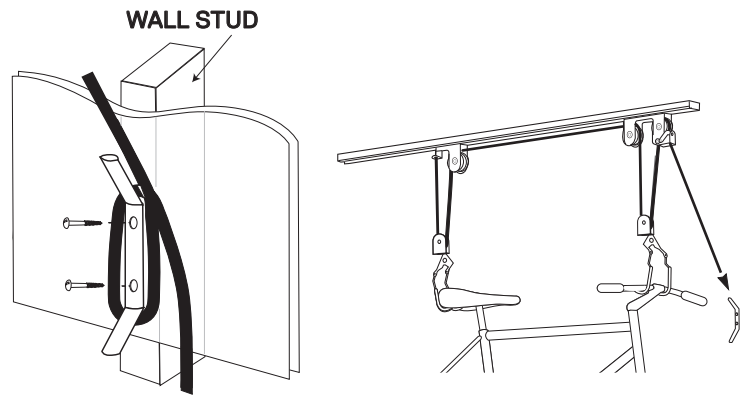

USAGE INSTRUCTIONS:

Raising an item


Ensure the hooks are properly secured on the item and the cord is not twisted before pulling on the cord. The auto-locking device will hold the item suspended with each pull. Once hoisted to the correct height, wrap the excess cord securely around the cleat.

Lowering an item

Keeping the tension in this direction, slowly let the cord out as the item lowers. Once low enough, remove item from the hooks and wrap the cord back on the cleat.

Using Straps:

First ensure the bulky item is properly secured, tightening the straps as needed at the buckle. Secure the loops onto all of the hooks before hoisting the item.

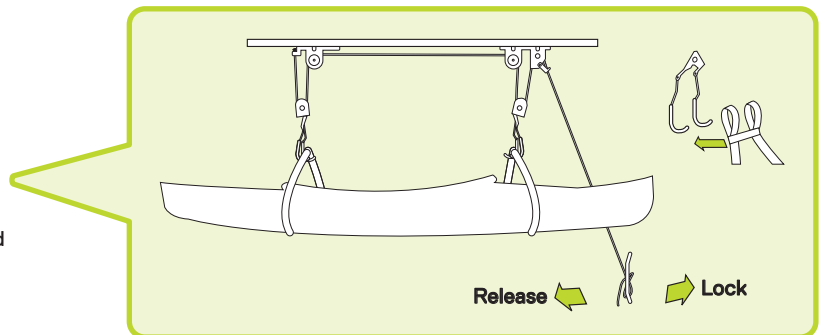

072723

