


# KAIA

## EON

### INSTALLATION MANUAL

#### EON

Suspension  
100 square




Type  
Material  
Environment  
Cable Length  
Dimensions  
Weight  
Certification  
EU/UK  
Ceiling Rose  
Lamps

Suspension light  
Brass  
Indoors  
2000 mm  
1100 x 1100 x 100 mm  
5 kg  
IP20 CE  
230 V  
square 70 x 70 x 25 mm  
max 120W, S14s,  
our suggestion:  
4x Linear opal LED, 2700 K,  
Mains ( Phase) dimmable,  
EPREL-ID: 566195

#### EON

Suspension  
50 square




Type  
Material  
Environment  
Cable Length  
Dimensions  
Weight  
Certification  
EU/UK  
Ceiling Rose  
Lamps

Suspension light  
Brass  
Indoors  
2000 mm  
600 x 600 x 100 mm  
4 kg  
IP20 CE  
230 V  
square 70 x 70 x 25 mm  
max 60W, S14s,  
our suggestion:  
4x Linear opal LED, 2700 K,  
Mains ( Phase) dimmable,  
EPREL-ID: 566200

## INSTALLATION

Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections.

### STEP 1

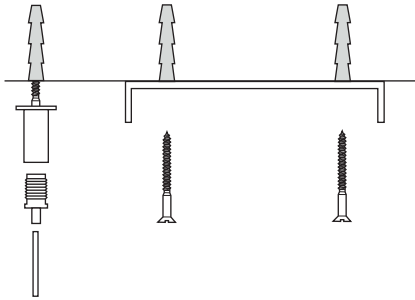

1. Ceiling Rose: Remove the base from the installation bracket. Affix the bracket to the ceiling with 2 screws (hole size max. 4.5 mm, 50 mm apart).

Wire Holders: Unscrew the main body from the threaded mounting block and mount on the ceiling.

2. Ceiling Rose: Connect the unit to the mains.


Wire Holders: Pass through wire rope firmly into the main body until it locks in place.

3. Ceiling Rose: Fix the unit back on its base and retighten 2 screws on the side.


Wire Holders: Screw wire rope into the rope fixing and cut the remaining wire.

4. Connect the lamp body to other lamp bodies (if necessary) and then to the power.

### STEP 2

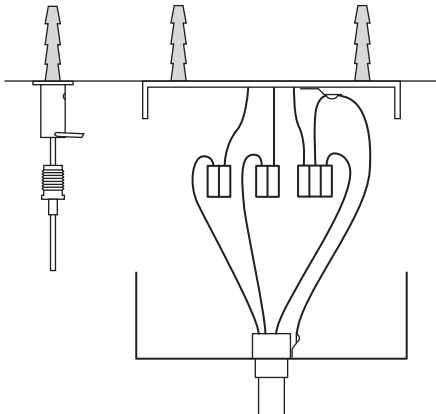


### STEP 3

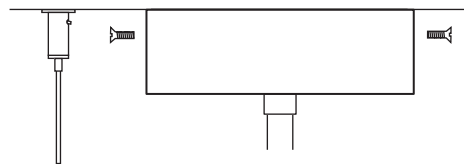

## STEP 4

Connection lamp body to lamp body

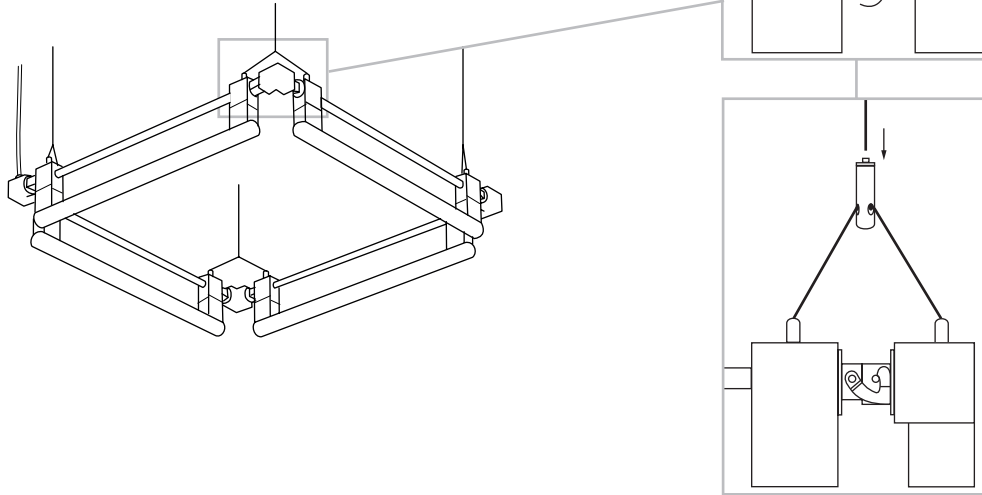

## CARE INSTRUCTIONS

1. Use a soft dry cloth to ensure a fingerprint free surface. We recommend the use of micro fibre cloths.
2. Warning: do not use alcohol or other solvents for cleaning.

\* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

\*\* Please contact [sales@kaialighting.com](mailto:sales@kaialighting.com) for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.