

ZERO 3



Colore standard 1 settimana
Standard color 1 week

○ **.01** Bianco
White (matt)

Colore su richiesta 2 settimane
Upon request color 2 weeks

● **.19** Grigio argento
Silver grey (matt)

● **.22** Nero
Black (matt)

● **.45** Ruggine
Rust

Colore speciale su richiesta 4/6 settimane
Upon request color 4/6 weeks

● **.51** Effetto fibra di carbonio
Carbon fiber effect

● **.43** Effetto cemento
Concrete effect

● **.30** Effetto rovere sbiancato
Whitened oak effect


● **.32** Effetto noce
Walnut effect


● **.33** Effetto wengè
Wengè effect


ZERO 3

IP40 - Classe I - CE / F



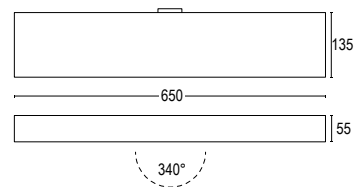

	3000K	4000K
	22502.--.31 22502.--.31.A 1-10V 22502.--.31.D DALI	22502.--.41 22502.--.41.A 1-10V 22502.--.41.D DALI
	64W LED 9200 lm CRI > 85 (≥ 95 upon request) 120° ^ 220÷240V 50/60 Hz alimentatore elettronico incluso <i>electronic driver included</i>	



	22504.--.31.AP	22504.--.41.AP 1-10V / PUSH
	2 x 18W LED 2 x 2700 lm CRI > 85 (≥ 95 upon request) 2x120° ^ 220÷240V 50/60 Hz alimentatore elettronico incluso <i>electronic driver included</i>	




	05545.--
	80W T5 2G11 120° ^ 220÷240V 50/60 Hz alimentatore elettronico incluso <i>electronic ballast included</i>

	22501.--
	80W T5 2G11 120° ^ 220÷240V 50/60 Hz alimentatore elettronico incluso <i>electronic ballast included</i>



North America

	22502.--.35.A 0-10V	22502.--.45.A 0-10V
	64W LED 9200 lm CRI > 85 (≥ 95 upon request) 120° ^ 120V 60 Hz alimentatore elettronico incluso <i>electronic driver included</i>	

