Adjustable Beam Metal

NSP-410

NSP-430

## **Tactical**



### Long Gun Light Kits

180L

Mini-TAC

MT-140B

100L 100L



MT-220

Mini-TAC Pro

Mini-TAC Pro Series Metal

## Duty / Personal-Size



## **UV Lights**



# Tactical Dual-Light Flashlights



## Rechargeable Scene / Area Lights







Nightstick products are designed and

manufactured by Bayco Products, Inc.,

is a global brand of professional lighting products including flashlights, headlamps

and Intrinsically Safe lighting solutions

that exceed the industry standards in

performance, quality, user-safety and value. Since 1984, Bayco Products, Inc. has been

the preferred choice of professionals and

discriminating consumers. The Nightstick and Bayco brands are recognized world-

wide as high-performance, high-quality, high-value lighting solutions across

virtually every industry. Headquartered in North Texas, Bayco Products' 110,000sf facility is the international headquarters for R&D, engineering, marketing, sales and distribution. Bayco Products has dedicated

ISO 9001 Certified factories both in the US and abroad. nightstick.com

Full-Size

### **Headlamps**












### Safety Lights

NSR-2124 Red and Blue Strobe (only sold to authorized public safety personnel)

NSP-1260

NSR-2492

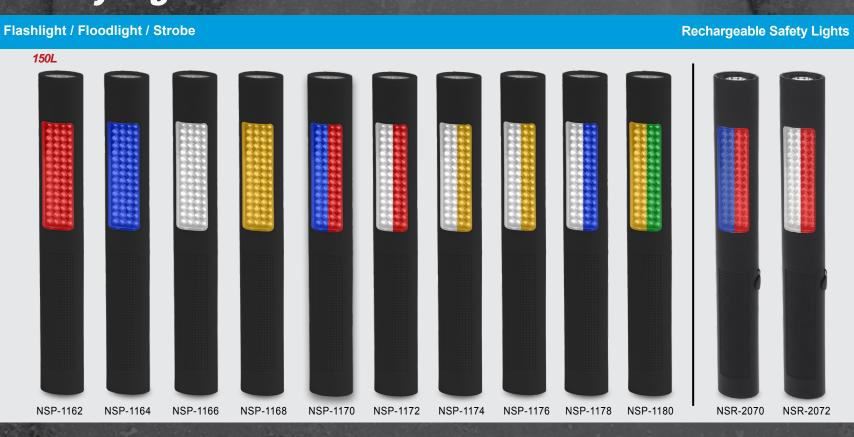

NSP-1310RM

# **Traffic Wands**

Constant-on / Strobe NSP-1632 NSP-1634 NSP-1636

Mini-TAC	Part Number	Lumens	Run-time (hrs)	Beam Distand	Cande	la Water Rating	Case Materia	Powe			Handle iameter	Weight	Wa	rranty	Certification
250	MT-90	35	1.5	29 m		Water	Aircraft-gra	ade 1 AA	2.65	in	0.6 in 15 mm)	1.1 oz (34 g)		nited etime	CE
No. Comm	MT-100	100	1.5	44 m	484	Water Resistant	Aircraft-gra	ade 2 AA	A 5.4 i		0.6 in 15 mm)	0.8 oz (23 g)		nited etime	CE
(William)	MT-100BL	100	1.5	44 m	484	Water Resistant	Aircraft-gra		A 5.4 i		0.6 in 15 mm)	0.8 oz (23 g)		nited etime	CE
1 Salifanne	MT-100R	100	1.5	44 m	484	Water Resistant	Aircraft-gra		A 5.4 i		0.6 in 15 mm)	0.8 oz (23 g)		nited etime	CE
Without T	MT-110	90	1	48 m	584	Water Resistant	Aircraft-gra	ade 1 AA	3.9 i		0.9 in 23 mm)	1.5 oz (43 g)		nited etime	CE
	MT-120	140	1.5	68 m	1,173	Water Resistant	Aircraft-gra	ade 2 AA	5.6 i		0.9 in 23 mm)	2.3 oz (65 g)		nited etime	CE
	MT-130	140	1.5	68 m	1,173	Water Resistant	Aircraft-gra Aluminu		5.6 i (142 m Overall 1 (396 n	m) - 5.6 in (2	0.9 in 23 mm)	5.2 oz (147 g)		nited etime	CE
	MT-140B	180	2.5	99 m	2,433	Water Resistant	Aircraft-gra		5.6 i (142 m Overall 2 (571.5	m) - 2.5 in (2	0.9 in 23 mm)	7.7 oz (219 g)	Lir Life	nited etime	CE
										11111 <i>)</i>					
									(371.3						
Mini-TAC Pro	Part Number	Multi- Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warran	cy Certification
Mini-TAC Pro		Function		(hrs)	Distance	Candela 667 / 334 / 204	Rating		Power				Weight  1.9 oz (54 g)	Warrani Limited Lifetime	l ce
Mini-TAC Pro	Number	Yes -		(hrs)	Distance 51 / 36 / 29 m		Rating Waterproof	Material Aircraft-grade	Power Source	Length 5.5 in	Diameter 0.7 in	Diameter 0.6 in	1.9 oz	Limited	CE CE
Mini-TAC Pro	Number MT-200	Yes Yes	100 / 60 / 30	(hrs)	Distance 51 / 36 / 29 m	667 / 334 / 204	Rating Waterproof Waterproof	Material  Aircraft-grade Aluminum  Aircraft-grade	Power Source 2 AAA	Length 5.5 in (140 mm) 4 in	0.7 in (18 mm) 0.9 in	0.6 in (15 mm)  0.6 in	1.9 oz (54 g)	Limited Lifetime	CE CE
Mini-TAC Pro	MT-200 MT-210	Yes Yes Yes 2	100 / 60 / 30	(hrs) 1.5 / 3 / 4.5 1.5 / 4 / 6	Distance 51 / 36 / 29 m 70 / 51 / 40 m 100 / 73 / 56 m	667 / 334 / 204 1,227 / 656 / 398 2,486 / 1,335	Rating Waterproof Waterproof Waterproof	Material  Aircraft-grade Aluminum  Aircraft-grade Aluminum  Aircraft-grade	Power Source 2 AAA	Length 5.5 in (140 mm) 4 in (102 mm) 6 in	0.7 in (18 mm)  0.9 in (23 mm)  0.9 in	0.6 in (15 mm)  0.6 in (15 mm)  0.6 in (15 mm)  0.6 in (15 mm)	1.9 oz (54 g) 2.2 oz (62 g)	Limited Lifetime Limited Lifetime	CE CE
Mini-TAC Pro	MT-210  MT-220  MT-230	Yes Yes Yes Yes	100 / 60 / 30	(hrs) 1.5/3/4.5 1.5/4/6 1.5/4/6 36/14/2	Distance 51 / 36 / 29 m 70 / 51 / 40 m 100 / 73 / 56 m 4 / 46 / 65 m	667 / 334 / 204 1,227 / 656 / 398 2,486 / 1,335 / 797	Rating Waterproof Waterproof Waterproof Waterproof Waterproof	Material  Aircraft-grade Aluminum  Aircraft-grade Aluminum  Aircraft-grade Aluminum  Aircraft-grade Aluminum	Power Source 2 AAA 1 AA 2 AA 1 AA	5.5 in (140 mm)  4 in (102 mm)  6 in (152 mm)	0.7 in (18 mm)  0.9 in (23 mm)  0.9 in (23 mm)  0.9 in (23 mm)	0.6 in (15 mm)  0.6 in (15 mm)  0.6 in (15 mm)  0.6 in (15 mm)	1.9 oz (54 g)  2.2 oz (62 g)  3.2 oz (91 g)  2.2 oz (62 g)	Limited Lifetime  Limited Lifetime  Limited Lifetime	CE CE
Mini-TAC Pro  Mini-TAC UV	MT-200  MT-210  MT-220	Yes Yes Yes 2	100 / 60 / 30	(hrs) 1.5/3/4.5 1.5/4/6	Distance 51 / 36 / 29 m 70 / 51 / 40 m 100 / 73 / 56 m	667 / 334 / 204 1,227 / 656 / 398 2,486 / 1,335 / 797	Rating Waterproof Waterproof Waterproof	Aircraft-grade Aluminum  Aircraft-grade Aluminum  Aircraft-grade Aluminum  Aircraft-grade Aluminum	Power Source 2 AAA 1 AA	5.5 in (140 mm)  4 in (102 mm)  6 in (152 mm)	0.7 in (18 mm) 0.9 in (23 mm) 0.9 in (23 mm)	0.6 in (15 mm)  0.6 in (15 mm)  0.6 in (15 mm)  0.6 in (15 mm)  Handle	1.9 oz (54 g)  2.2 oz (62 g)  3.2 oz (91 g)  2.2 oz (62 g)	Limited Lifetime  Limited Lifetime  Limited Lifetime  Limited Lifetime	CE CE CE
	MT-210  MT-220  MT-230	Yes Yes Multi-Function	100 / 60 / 30 120 / 55 / 30 200 / 90 / 45 3.6 / 10 / 60	(hrs) 1.5/3/4.5 1.5/4/6 1.5/4/6 36/14/2 Run-time	Distance 51 / 36 / 29 m 70 / 51 / 40 m 100 / 73 / 56 m 4 / 46 / 65 m	1,227 / 656 / 398 2,486 / 1,335 / 797 4 / 538 / 1,076	Rating Waterproof Waterproof Waterproof Waterproof Waterproof	Material  Aircraft-grade Aluminum  Aircraft-grade Aluminum  Aircraft-grade Aluminum  Aircraft-grade Aluminum  Case	Power Source  2 AAA  1 AA  2 AA  1 AA	Length 5.5 in (140 mm) 4 in (102 mm) 6 in (152 mm) 4 in (102 mm)	0.7 in (18 mm) 0.9 in (23 mm) 0.9 in (23 mm) 0.9 in (23 mm) Head Diamete	0.6 in (15 mm)  0.6 in (15 mm)  0.6 in (15 mm)  0.6 in (15 mm)  Handle	1.9 oz (54 g)  2.2 oz (62 g)  3.2 oz (91 g)  2.2 oz (62 g)  Weight  0.8 oz	Limited Lifetime  Limited Lifetime  Limited Lifetime  Limited Lifetime	CE  CE  CE  CE  CE  CE  CE  CE

				(/											
	MT-200	Yes	100 / 60 / 30	1.5 / 3 / 4.5	51 / 36 / 29 m	667 / 334 / 204	Waterproof	Aircraft-grade Aluminum	2 AAA	5.5 in (140 mm)	0.7 in (18 mm)	0.6 in (15 mm)	1.9 oz (54 g)	Limited Lifetime	CE
	MT-210	Yes	120 / 55 / 30	1.5 / 4 / 6	70 / 51 / 40 m	1,227 / 656 / 398	Waterproof	Aircraft-grade Aluminum	1 AA	4 in (102 mm)	0.9 in (23 mm)	0.6 in (15 mm)	2.2 oz (62 g)	Limited Lifetime	CE
	MT-220	Yes	200 / 90 / 45	1.5/4/6	100 / 73 / 56 m	2,486 / 1,335 / 797	Waterproof	Aircraft-grade Aluminum	2 AA	6 in (152 mm)	0.9 in (23 mm)	0.6 in (15 mm)	3.2 oz (91 g)	Limited Lifetime	CE
	MT-230	Yes	3.6 / 10 / 60	36 / 14 / 2	4 / 46 / 65 m	4 / 538 / 1,076	Waterproof	Aircraft-grade Aluminum	1 AA	4 in (102 mm)	0.9 in (23 mm)	0.6 in (15 mm)	2.2 oz (62 g)	Limited Lifetime	CE
Mini-TAC UV	Part Number	Multi- Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diamete	Handle r Diameter		Warranty	Certification
			365				Water	Aircraft grade		5.4 in		0.6 in	0.8.07	Limited	

MTU-136  MUlti-  (hrs)  Distance  Candela  Mater Rating  Mater Rating  Mater Resistant  Aircraft-grade Aluminum  CE  Length Diameter D								, , ,	` 1	` /	(* 3/		
Number Function Lumens (hrs) Distance Candela Rating Material Source Length Diameter Diameter Weight Warranty Certificate  MTU-106 365 Nanometers 0.75 Water Resistant Aluminum 2 AAA 5.4 in (137 mm) 0.8 oz (23 g) Limited CE  Water Resistant Aluminum 2 AAA 0.9 in (142 mm) 0.9 in (15 mm) 0.9 in (147 g) Lifetime CE													
MTU-106 Nanometers 0.75 Resistant Aluminum 2AAA (137 mm) (15 mm) (23 g) Lifetime CE  Water Aircraft-grade 2AA Overall (23 mm) - Overall (23 mm) - Overall (23 mm) (147 g) Lifetime CE	Mini-TAC UV		Lumens		Candela			Length			Weight	Warranty	Certificatio
MTU-136 365 1.25 Water Aircraft-grade 2 AA Overall (23 mm) (147 g) Lifetime CE	Till Bullet	MTU-106		0.75			2 AAA						CE
(396 mm)	-	MTU-136		1.25			2 AA	mm) - Overall 15.6 in					CE

	Part	Xtreme	Multi-		Run-time	Beam		Water	Case	Power		Head	Handle			
Tactical	Number	Lumens	Function	Lumens	(hrs)	Distance	Candela	Rating	Material	Source	Length	Diameter	Diameter	Weight		Certificatio
	FDL-300R			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-300B			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
franconnen	TAC-300T			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-300Y			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-302B			150	3.5	180 m	8,072	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-310XL	Yes		500	1.5	150 m	5,597	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
SANGARAHANA D	TAC-350B			180	3	190 m	9,150	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.7 oz (162 g)	Limited Lifetime	CE
Horistonia D	TAC-360XL	Yes		500	1.5	150 m	5,597	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.7oz (162g)	Limited Lifetime	CE
THE THE PROPERTY OF THE PARTY O	TAC-400B			200	3	210 m	12,000	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.9 oz (140g)	Limited Lifetime	CE
	TAC-400Y			200	3	210 m	12,000	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.9 oz (140 g)	Limited Lifetime	CE
	TAC-410XL	Yes		800	2	205 m	10,765	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.9 oz (140 g)	Limited Lifetime	CE
Apparatable of the control of the co	TAC-450B			200	3	210 m	12,000	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.3 oz (179 g)	Limited Lifetime	CE
	TAC-460XL	Yes		800	2	205 m	10,765	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.3 oz (179 g)	Limited Lifetime	CE
	TAC-500B		Yes	200 / 125 / 65	3/6/12	210 / 150 / 95 m	12,000 / 4,951 / 2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.1 oz (145 g)	Limited Lifetime	CE
	TAC-500T		Yes	200 / 125 / 65	3/6/12	210 / 150 / 95 m	12,000 / 4,951 / 2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.1 oz (145 g)	Limited Lifetime	CE
	TAC-500Y		Yes	200 / 125 / 65	3/6/12	210 / 150 / 95 m	12,000 / 4,951 / 2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.1 oz (145 g)	Limited Lifetime	CE
	TAC-510XL	Yes	Yes	800 / 350 / 140	2 / 3.75 / 8.75	205 / 157 / 99 m	10,765 / 6,182 / 2,460	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.1 oz (145 g	Limited Lifetime	CE
555500000000000000000000000000000000000	TAC-540XL	Yes	Yes	800 / 350 / 140	1.5 / 2 / 4.5	205 / 157 / 99 m	10,765 / 6,182 / 2,460	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.1 oz (173 g)	Limited Lifetime	CE
(1000000000000000000000000000000000000	TAC-550B		Yes	200 / 125 / 65	3/6/12	210 / 150 / 95 m	12,000 / 4,951 / 2,250	Waterproof	Aircraft-grade Aluminum	Rechargeable	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.1 oz (173 g)	Limited Lifetime	CE
533350000000	TAC-560XL	Yes	Yes	800 / 350 / 140	2 / 3.75 / 8.75	205 / 157 / 99 m	10,765 / 6,182 / 2,460	Waterproof	Aircraft-grade Aluminum	Rechargeable	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.1 oz (173 g)	Limited Lifetime	CE

Long Gun Kits	Part Number	Xtreme Lumens	Multi- Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	TAC- 300B-K01			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	6 in (152 mm) w/RPS	1.25 in (32 mm)	1.035 in (26mm)	6.3 oz (179 g) w/RPS	Limited Lifetime	CE
	TAC- 302B-K01 Green LED			150	3.5	180 m	8,072	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium	6 in (152 mm) w/RPS	1.25 in (32 mm)	1.035 in (26mm)	6.3 oz (179 g) w/RPS	Limited Lifetime	CE
	TAC-460XL -K01	Yes		800	2	205 m	10,765	Waterproof		2 CR-123 Lithium. Upgrade- able to recharge- able Lithium-ion	6.7 in (170 mm)	1.25 in (32 mm)	1.035 in (26mm)	7.6 oz (215 g)	Limited Lifetime	CE

Area Lights	Part Number	Xtreme Lumens	Multi- Function	Lumens	Run-time (hrs)	Water Rating	Case Material	Power Source	Length	Width	Height	Weight	Warranty	Certification
	NSR-1514	Yes	Yes	1,000 / 500	4/8	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.1 in (155 mm)	3.5 in (89 mm)	12 in (305 mm)	52.8 oz (1,496 g)	1 Year Limited	CE
	NSR-1514C	Yes	Yes	1,000 / 500	4/8	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	32 in (813 mm)	5 in (127 mm)	16 in (406 mm)	288 oz (3,629 g)	1 Year Limited	CE



Duty/Personal-Size	Part Number	Dual- Light	Xtreme Lumens	Multi- Func- tion	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	NSR-9514XL		Yes	Yes	850 / 200 / 50	6.5 / 9 / 50	325 / 166 / 85 m	26,280 / 6,880 / 450	Waterproof	Glass-filled Nylon Polymer	Recharge- able Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.1 oz (286 g)	Limited Lifetime	CE
	NSR-9514Y			Yes	350 / 200 / 55	4.25 / 8.5 / 32.5	313 / 235 / 118 m	24,100 / 12,075 / 6,200	Waterproof	Glass-filled Nylon Polymer	Recharge- able Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.1 oz (286 g)		CE
	NSR-9614XL		Yes	Yes	850 / 200 / 50	6.5 / 9 / 50	325 / 166 / 85 m	26,280 / 6,880 / 450	Waterproof	Aircraft-grade Aluminum	Recharge- able Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	12.8 oz (363 g)	Limited Lifetime	CE
	NSR-9920XL	Yes	Yes	Yes	650 / 300 / 150 / 200 / 400	4.25 / 9.5 / 18.75 / 7.25 / 7	304 / 212 / 115 m	23,142 / 11,302 / 6,028	Waterproof	Glass-filled Nylon Polymer	Recharge- able Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.9 oz 309 g)	Limited Lifetime	CE
	NSR-9924XL	Yes	Yes	Yes	650 / 300 / 150 / 200 / 400	4.25 / 9.5 / 18.75 / 7.25 / 7	304 / 212 / 115 m	23,142 / 11,302 / 6,028	Waterproof	Glass-filled Nylon Polymer	Recharge- able Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	9.9 oz (281 g)	Limited Lifetime	CE
	NSR-9940XL	Yes	Yes	Yes	650 / 300 / 150 / 200 / 400	4.25 / 9.5 / 18.75 / 7.25 / 7	304 / 212 / 115 m	23,142 / 11,302 / 6,028	Waterproof	Aircraft-grade Aluminum	Recharge- able Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	13.2 oz (374 g)	Limited Lifetime	CE
	NSR-9944XL	Yes	Yes	Yes	650 / 300 / 150 / 200 / 400	4.25 / 9.5 / 18.75 / 7.25 / 7	304 / 212 / 115 m	23,142 / 11,302 / 6,028	Waterproof	Aircraft-grade Aluminum	Recharge- able Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	13.2 oz (374 g)		CE

Full-Size	⊃art Number		Xtreme Lumens	Multi- Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
N	NSR-9744XL	Yes	Yes	Yes	650 / 300 / 150 / 200 / 400	6 / 10.5 / 26 / 10 / 8.75	275 / 200 / 146 m	18,675 / 9,687 / 4,857	Waterproof	Aluminum	Recharge- able Lithium-ion	11.8 in (300 mm)	1.6 in (41 mm)	1.2 in (30 mm)	17.5 oz (496 g)	Limited Lifetime	CE
N N	NSR-9746XL		Yes	Yes	650 / 390 / 100	4/8/44	450 / 295 / 70 m	64,253 / 25,834 / 15,286	Waterproof	Aluminum	Recharge- able Lithium-ion	12.8 in (325 mm)	2.4 in (61 mm)	1.2 in (30 mm)	22.5 oz (638 g)	Limited Lifetime	CE

Traffic Wands	Part Number	Multi- Function	Run-time (hrs)	Water Rating	Case Material	Power Source	Length	Diameter	Weight	Warranty	Certification
	NSP-1632	Yes	18 / 27	Waterproof	Engineered Polymer	3 AAA	16.5 in (419.1 mm)	1.575 in (40 mm)	5.3 oz (151 g)	1 Year Limited	CE
	NSP-1634	Yes	18 / 27	Waterproof	Engineered Polymer	3 AAA	16.5 in (419.1 mm)	1.575 in (40 mm)	5.3 oz (151 g)	1 Year Limited	CE
	NSP-1636	Yes	18 / 27	Waterproof	Engineered Polymer	3 AAA	16.5 in (419.1 mm)	1.575 in (40 mm)	5.3 oz (151 g)	1 Year Limited	CE

Headlamps	Part Number	Dual- Light	Multi- Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Width	Height	Depth	Weight	Warranty	Certification
TO TO THE SECOND	NSP-4602B	Yes	Yes	30 / 15 / 35	15 / 36.5 / 12	19 m	92	Waterproof	Engineered Polymer	3 AAA	2.4 in (61 mm)	1.9 in (48 mm)	1.8 in (46 mm)	3.3 oz (94 g)	1 Year Limited	CE
North	NSP-4603B		Yes	120 / 70	5.5 / 14	144 / 100 m	5,324 / 2,498	Waterproof	Engineered Polymer	3 AAA	2.5 in (63.5 mm)	2.2 in (56 mm)	2 in (51 mm)	3.5 oz (100 g)	1 Year Limited	CE
NO.HI, GIV	NSP-4604B	Yes	Yes	100 / 45 / 90	7/8/8.5	93 m	2,169	Waterproof	Engineered Polymer	3 AAA	2.5 in (63.5 mm)	2.2 in (56 mm)	2 in (51 mm)	3.5 oz (101 g)	1 Year Limited	CE
Nonego	NSP-4605B		Yes	150 / 80	4 / 7.5	175 / 126 m	7,960 / 4,081	Waterproof	Engineered Polymer	3 AAA	2.5 in (63.5 mm)	2.2 in (56 mm)	2 in (51 mm)	3.5 oz (100 g)	1 Year Limited	CE
NONE SECTION OF THE PROPERTY O	NSP-4606B	Yes	Yes	140 / 50 / 150	3.5 / 8.5 / 4.25	116 m	3,442	Waterproof	Engineered Polymer	3 AAA	2.5 in (63.5 mm)	2.2 in (56 mm)	2 in (51 mm)	3.5 oz (100 g)	1 Year Limited	CE
None Section 200	NSP-4608B	Yes	Yes	100 / 60 / 90 / 50 / 180	5 / 13.5 / 4.25 / 13.75 / 2.5	77 / 55 m	1,506 / 775	Waterproof	Engineered Polymer	3 AAA	2.6 in (66 mm)	2.1 in (53 mm)	1.8 in (46 mm)	3.3 oz (94 g)	Limited Lifetime	CE
-	NSP-4608BC	Yes	Yes	100 / 60 / 90 / 50 / 180	5 / 13.5 / 4.25 / 13.75 / 2.5	77 / 55 m	1,506 / 775	Waterproof	Engineered Polymer	3 AAA	2.6 in (66 mm)	2.1 in (53 mm)	1.8 in (46 mm)	3.4 oz (97 g)	Limited Lifetime	CE
None State	NSP-4610B		Yes	150 / 80 / 100 / 9 / 18	4 / 8 / 4 / 25 / 22.5	60 / 43 m	1,377 / 667	Waterproof	Engineered Polymer	3 AAA	2.5 in (64 mm)	1.8 in (46 mm)	1.7 in (43 mm)	3.7 oz (104 g)	Limited Lifetime	CE
	NSP-4612B	Yes	Yes	100 / 90 / 20 / 18 / 175	18 / 13.5 / 75 / 37 / 3.5	140 m	4,820	Waterproof	Engineered Polymer	3 AA	3.3 in (84 mm)	3.3 in (84 mm)	3.5in (89 mm)	9.5 oz (269 g)	Limited Lifetime	CE
	NSP-4614B	Yes	Yes	150 / 75 150 / 75 / 300	3/6 3/6 1.5	76 / 55 m	1,315 684	Waterproof	Engineered Polymer	3 AAA	3.6 in (90 mm)	1.6 in (40 mm)	1.9 in (48 mm)	5.8 oz (164 g)	Limited Lifetime	CE
	NSP-4616B	Yes	Yes	250 / 125 250 / 125 / 450 / 250	6.5 / 10.5 6.5 / 10.5 3.5 / 6.5	78 / 71 m	1500 1250	Waterproof	Engineered Polymer	3 AA	3.75 in (95 mm)	1.25 in (32 mm)	1 in (25 mm)	9.3 oz (265 g)	Limited Lifetime	CE

Multi-Purpose	Part Number	Dual- Light	Xtreme Lumens	Multi- Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
TOUSUON	NSP-1310RM	Yes		Yes	5 / 150	80 / 2.25			Water Resistant	Engineered Polymer	3 AAA	6.5 in (165mm)	1.375 in (35 mm)		2.6 oz (74 g)	1 Year Limited	CE
#	NSP-1206R	Yes			9 / 16 / 17	5/7/4	15	53	Water Resistant	Engineered Polymer	2 AAA	4.4 in (112mm)		1.1 x 0.8 in (28 x 20 mm)	1.8 oz (51 g)	1 Year Limited	CE
	NSP-1260	Yes		Yes	150 / 120 / 60 / 270	10/4/10/3			Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)		1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CE
#	NSP-1400B	Yes		Yes	60 / 25 / 90	3/3/1.5	50 m	650	Water Resistant	Engineered Polymer	2 AAA	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	1 Year Limited	CE
#	NSP-1400R	Yes		Yes	60 / 25 / 90	3/3/1.5	50 m	650	Water Resistant	Engineered Polymer	2 AAA	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	1 Year Limited	CE
#	NSP-1400T	Yes		Yes	60 / 25 / 90	3/3/1.5	50 m	650	Water Resistant	Engineered Polymer	2 AAA	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	1 Year Limited	CE
#	NSP-1402B	Yes		Yes	60 / 15	3 / 2.8	50 m	650	Water Resistant	Engineered Polymer	2 AAA	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	1 Year Limited	CE
#	NSP-1404B	Yes		Yes	60 / 10	3 / 5.5	50 m	650	Water Resistant	Engineered Polymer	2 AAA	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	1 Year Limited	CE
	NSP-2422B	Yes		Yes	130 / 110 / 235	9.5 / 10.5 / 6	181 m	8,150	Waterproof	Engineered Polymer	3 AA	7 in (178 mm)	1.8 in (46 mm)	1.3 x 1 in (33 x 25 mm)	6.4 oz (181 g)	1 Year Limited	CE
	NSP-2422R	Yes		Yes	130 / 110 / 235	9.5 / 10.5 / 6	181 m	8,150	Waterproof	Engineered Polymer	3 AA	7 in (178 mm)	1.8 in (46 mm)	1.3 x 1 in (33 x 25 mm)	6.4 oz (181 g)	1 Year Limited	CE
	NSR-2492	Yes		Yes	200 / 170 / 325	3/2.5/1.5	170 m	6,953	Water Resistant	Engineered Polymer	Rechargeable NiMH	11.5in (292 mm)		2.3 in (58 mm)	19.2 oz (544g)	1 Year Limited	CE
	NSR-2522RM	Yes		Yes	250 / 140 / 350	9.5 / 9.5 / 5	213 m	12,544	Waterproof	Engineered Polymer	Rechargeable Lithium-ion	7.4 in (187 mm)	2.1 in (53 mm)	1.7 x 1.3 in (43 x 33 mm)	10.2 oz (187 g)	Limited Lifetime	CE
	NSR-2168B		Yes	Yes	600 / 225	4.5 / 12.5			Water Resistant	Engineered Polymer	Rechargeable Lithium-ion	14.6 in (371 mm)	1.6 in x 1.3 in (41 x 33 mm)	2 in x 2 in (51 x 51 mm)	12.2 oz (347 g)	1 Year Limited	CE
	NSR-2168R		Yes	Yes	600 / 225	4.5 / 12.5			Water Resistant	Engineered Polymer	Rechargeable Lithium-ion	48.5 in (123 mm)	1.6 in x 1.3 in (41 x 33 mm)	2 in x 2 in (51 x 51 mm)	5.5 lbs (2.5 kg)	1 Year Limited	CE
S today constraint and	SLR-2120			Yes	1200/650	4.5 / 8.5			Water Resistant	Engineered Polymer	Rechargeable Lithium-ion	42.4 in (1,077 mm)		2 in (51 mm)	115 oz (3,260 g)	1 Year Limited	CE

Safety Lights	Part Number	Multi- Function	Lumens	Run-time (hrs)	Water Rating	Case Material	Power Source	Length	Handle Diameter	Weight	Warranty	Certification
(	NSP-1162	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CE
(11111111111111111111111111111111111111	NSP-1164	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CE
	NSP-1166	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CE
	NSP-1168	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CE
	NSP-1170	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CE
(11111111111111111111111111111111111111	NSP-1172	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CE
	NSP-1174	Yes	150 / 120	10 / 8 / 24	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CE
	NSP-1174-K01	Yes	150 / 120	10 / 8 / 24	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CE
	NSP-1176	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CE
9	NSP-1178	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CE
(11111111111111111111111111111111111111	NSP-1180	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CE
( ( ( ( ( ( ( ( ( ( ( ( ( ( ( ( ( ( ( (	NSR-2070	Yes	150 / 50	7.5/4/6	Water Resistant	Engineered Polymer	Rechargeable Lithium-ion	11.625 in (295 mm)	15 in x 1.125 in (38 mm x 29 mm)	6.8 oz (195 g)	1 Year Limited	CE
	NSR-2072	Yes	150 / 50	7.5/4/6	Water Resistant	Engineered Polymer	Rechargeable Lithium-ion	11.625 in (295 mm)	15 in x 1.125 in (38 mm x 29 mm)	6.8 oz (195 g)	1 Year Limited	CE



# **BAYCO**PRODUCTS INC.

640 S. Sanden Blvd. Wylie, TX 75098 (800) 233-2155 (469) 326-9400

### nightstick.com

Nightstick products are designed in Texas, US and manufactured abroad with components from domestic and international sources. The distinctive shapes, styles, packaging, configurations and overall appearances of these products are trademarks of Bayco Products, Inc.

The unique LED configuration, body and case shapes inherently identify them as members of the Bayco Products, Inc. portfolio.



### Nightstick - Performance, Quality, and Value

Real-world Product Performance: Nightstick products are built not only with lumen ratings that exceed most competitor products, but also with optimized performance characteristics such as candela, beam distance and run-times. The design must take into consideration all of these factors to impact a light's efficiency and performance. Nightstick products are also designed and manufactured using the best quality housing materials, precision engineered reflectors, reliable real-world switch functionality, state-of-the-art electronics

and latest generation battery technology. Innovations such as Nightstick's exclusive Dual-Light™ design, combining a flashlight and a floodlight into a single light the ability to turn both on simultaneously for added versatility and safety, is altering the idea of what a flashlight is. Further evidence of this innovative

thinking is shown by our complete line of Intrinsically Safe lights that have the highest safety ratings in the world.



All products produced in Bayco Products' dedicated ISO 9001 Certified Factories undergo rigorous quality control inspections conducted by independent 3rd party inspectors at multiple points during the manufacturing process. Additional quality

TECHNOLOGY

Featuring **Dual-Light** 

control inspections take place as products arrive and leave Bayco Products' distribution facility. Quality is also demonstrated in the customer service experience...with a target of nothing less than 100% customer satisfaction. Our quality is also backed by a Limited Lifetime Warranty.

Exceptional Value: Quite simply, the Nightstick product line is designed and manufactured to outperform and be of a higher quality standard than any other product in its class. Even with the highest quality standards, Nightstick products cost less as compared to competitor offerings. We remain committed to delivering the industry's best performing, highest-quality products at the lowest cost possible.



FLY-NSMAP-18