



USER GUIDE

Instruction Manual

Ice cUBE

FRIDGE / FREEZER

30L
CAPACITY

40L
CAPACITY

50L
CAPACITY



This user guide includes information on the following IceCube Fridge/ Freezer models:

IFRIDGE30 (30L), IFRIDGE40 (40L) and IFRIDGE50 (50L)

Dear Customer,

Thank you for purchasing an Ironman 4x4 IceCube Fridge/Freezer. Our fridge/freezer is an ideal companion for keeping your beverages, refreshments and food refrigerated while on outback trips, picnics, camping, fishing or shopping trips.

Features:

- Danfoss BD-35F Compressor - The world's most reliable cooling system.
- The best electronic technology, high efficiency and low energy consumption.
- Multi-Voltage System (DC 12-24V) and (AC 100-120/ 220-240V)
- Automatic Battery Protection

Contents in box:

- IceCube Fridge/Freezer Unit
- 12V/ 24V Power Cable
- 240V Power Cable

Also available separately for this product:

- Heavy Duty Insulated Transit Bag
- Fridge Slide
- Fridge Tie Down Straps
- Ironman 4x4 Dual Battery Kits

IMPORTANT: Before first time use of this unit, you should carefully read these instructions to familiarise yourself with the correct connection and operations for your fridge.

INDEX

| | |
|--------------------------------|----------------|
| Product Safety | Page 4 |
| General Notes | Page 4 |
| Connection | Page 5 |
| Operation..... | Page 6 |
| Cleaning and Maintenance | Page 7 |
| Troubleshooting | Page 7 |
| | |
| Technical Data | |
| IFRIDGE30 - 30L..... | Page 8 |
| IFRIDGE40 - 40L..... | Page 9 |
| IFRIDGE50 - 50L..... | Page 10 |
| Warranty..... | Page 11 |

Product Safety

Do NOT touch exposed cables with your bare hands, this especially applies when operating the appliance from an AC source.

It is dangerous to touch the plug with wet hands.

When using the refrigerator in a vehicle or boat, make sure that power supply circuit is properly fused.

The installation of a DC power source should only be handled by qualified persons

Make sure unit is only connected to the correct power supply.

Do not immerse in water.

Do not place any electrical devices inside refrigerator.

General Notes:

Your product requires good ventilation, especially around the back of the refrigerator.

Allow a gap of at least 200mm around the back of unit and approximately a 100mm gap to the right hand side.

Avoid humidity inside the appliance: Humidity inside the appliance can form frost and impair cooling. Therefore defrost the unit regularly.

Never clean appliance under running water or in dishwasher.

Avoid placing your refrigerator near a heat source as this will reduce the cooling efficiency.

Place the refrigerator on a flat surface away from edges.

When placing the unit into a vehicle, make sure it is secured properly.

Connection

Power: The 12/ 24V and mains power can be present at the same time, the device will always set itself to the mains power supply as a priority.

Unit must always be connected to an adequate power supply and DC connection must always be fused.

For cable length and specification, refer to table below.

| Cable Area | | 12V Max Cable Length | | 24V Max Cable Length | |
|--------------------|-----|----------------------|-------|----------------------|-------|
| [mm ²] | AWG | [m] | [ft.] | [m] | [ft.] |
| 2.5 | 12 | < 2.5 | < 8 | < 5 | < 16 |
| 4 | 12 | < 4 | < 13 | < 8 | < 26 |
| 6 | 10 | < 6 | < 20 | < 12 | < 39 |
| 10 | 8 | < 10 | < 33 | < 20 | < 66 |

(AWG - American Wire Gauge)


The length measurement in the above table is from the battery to the refrigerator.

Protection: This unit has an in built automatic low-voltage cutout system, designed to protect your battery from discharging completely. This will automatically turn off the compressor when the battery discharges to Cut-Out voltage (See table below). The compressor will automatically restart when voltage increases to Cut-In (See table below).

| Battery Protection | 12V Cut-Out | 12V Cut-In | 24V Cut-Out | 24V Cut-In |
|--------------------|-------------|------------|-------------|------------|
| LOW | 10.2V | 11.2V | 21.6V | 23.0V |
| MED | 10.7V | 11.7V | 22.6V | 24.0V |
| HIGH | 11.7V | 12.7V | 24.6V | 26.0V |

IMPORTANT: If your fridge cuts out prematurely, this may be due to the Battery Protection being set too high. Consider lowering the battery protection level via the switch located on the rear power panel.

Operation

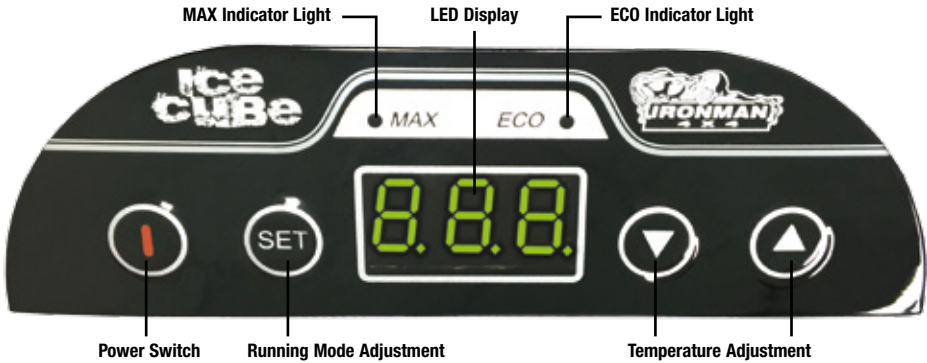

Set Temperature Mode: When the fridge is on, press and hold the SET button and momentarily press the ▲ UP button. The screen will display an 'F' for fahrenheit, or 'C' for celcius. Press the ▲ UP button to alternate between either mode. The screen display will flicker for 3 seconds, then auto-save your selection and automatically exit.

Set Temperature Compensation: The temperature compensation setting is used to set the temp probe and inner cabinet temperature difference, with a range of -10 to +10. When the fridge is on, press and hold the SET button and momentarily press the ▼ DOWN button. The screen will scroll through the 3 setting variations each time you momentarily press the ▼ DOWN button.

F1: -10°C

F2: 0°C

F3: +10°C

Temperature Setting Range: -30°C~40°C, -22°F~104°F

LED Display Range: -20°C~45°C, -40°F~113°F

Plug in the DC or AC power. Press the ON/OFF Button to turn the unit on. The LED Display on the control panel will illuminate and the interior temperature of unit will be displayed.

Press the ▲ UP and ▼ DOWN to adjust the temperature. Press the ▲ UP button to increase the temperature, or the ▼ DOWN to decrease the temperature.

Press the ECO Button to activate the Economy running mode, the ECO indicator light will illuminate green. Press the button again to activate MAX running mode, the MAX indicator light will then illuminate red.

ECO Mode: Reduces power consumption and is used once fridge is down to its desired operating temperature.

MAX Mode: Is used to reduce the internal temperature more rapidly.

NOTE: Fridge will consume more power on this setting.

If power supply is cut off, refrigerator will automatically restart when power supply is restored.

Cleaning and Maintenance

Clean the unit inside and out with a damp cloth. For more stubborn dirt, sodium bicarbonate dissolved in lukewarm water may be used.

Never use abrasive products, detergents or soap. After washing rinse with clean water and dry carefully. Make sure power is disconnected while doing this.

If unit is not being used for long periods of time, do NOT fully close lid. This is to prevent mould and odours.

Troubleshooting

If unit will not turn on, check:

- Power supply ie. Battery voltage (See Battery Protection table on Page 5)
- Check all connections between battery and fridge
- Check condition of fuse
- Check that the unit is turned on

If contents of fridge are freezing:

- Temperature setting is too low

Poor refrigeration performance:

- Too much food has been placed inside refrigerator
- Temperature of food placed in fridge is too high
- The door is not closed properly
- Door seal is broken

Poor cooling:

- Make sure adequate ventilation room is left around unit (See General Notes Page 4)
- Ambient temperature is extremely high
- Temperature is not set correctly

Sound of water from inside of unit:

- This is normal due to flow of refrigerant

Noise

- Unit is not on a flat or level surface
- Check for vibrations in surrounding objects

| CODE | ERROR TYPE |
|-------------|--|
| E5 | Compressor has overheated (Internal temperature too high due to insufficient airflow) |
| E3 | Compressor motor starter error (Motor blockage, cooling system pressure difference or low voltage battery) |
| E2 | Fan fault |
| E1 | Battery protection stop (Voltage over setting) - Refer to page 5 |

Technical Data

| | |
|---|--|
| Item No. | IFRIDGE30 |
| Approx gross capacity (L) | 30L |
| Supply Voltage (V) | 12/ 24 // 100-240 |
| Dimensions (mm) | H - 380mm W - 350mm L - 585mm |
| Temp. Range / regulation | +10 to -18°C |
| Approx. Weight (kg) | 16kg |
| Material CFC free | CFC-Free |
| Insulation | PU foam |
| Interior light | LED |
| Average power consumption | 40 Watt |
| Current draw on 12V (5C inside, 20C outside) | approx. 0.7 Ah/h |
| Certification | GS/ CE/ E certified |
| Guarantee period | 5 year on compressor 3 year on components |
| Battery protection | 3 Stage low voltage protection |



Technical Data

| | |
|---|--|
| Item No. | IFRIDGE40 |
| Approx gross capacity (L) | 40L |
| Supply Voltage (V) | 12/ 24 // 100-240 |
| Dimensions (mm) | H - 490mm W - 350mm L - 585mm |
| Temp. Range / regulation | +10 to -18°C |
| Approx. Weight (kg) | 17kg |
| Material CFC free | CFC-Free |
| Insulation | PU foam |
| Interior light | LED |
| Average power consumption | 40 Watt |
| Current draw on 12V (5C inside, 20C outside) | approx. 0.7 Ah/h |
| Certification | GS/ CE/ E certified |
| Guarantee period | 5 year on compressor 3 year on components |
| Battery protection | 3 Stage low voltage protection |



Technical Data

| | |
|---|--|
| Item No. | IFRIDGE50 |
| Approx gross capacity (L) | 50L |
| Supply Voltage (V) | 12/ 24 // 100-240 |
| Dimensions (mm) | H - 530mm W - 350mm L - 585mm |
| Temp. Range / regulation | +10 to -18°C |
| Approx. Weight (kg) | 18.5kg |
| Material CFC free | CFC-Free |
| Insulation | PU foam |
| Interior light | LED |
| Average power consumption | 40 Watt |
| Current draw on 12V (5C inside, 20C outside) | approx. 0.7 Ah/h |
| Certification | GS/ CE/ E certified |
| Guarantee period | 5 year on compressor 3 year on components |
| Battery protection | 3 Stage low voltage protection |



Warranty

This fridge/ freezer comes with a 5 year compressor warranty and a 3 year components warranty from the day of purchase under the following conditions. Any warranty claims exclude parts such as fuses, connectors, plugs, etc.

- All defects are variably attributable to material or production errors.
- Warranty claim must be made within the warranty period.
- Purchase receipt must be presented with unit warranty claim.
- Improper use of unit will void warranty.
- Warranty will be void if the unit is run with supplementary parts or accessories from other manufacturers.
- Warranty does not cover fridge content spoilage or loss.

Claims other than the above are not covered by warranty, Ironman 4x4 reserves the right to repair or replace at our discretion.

For any service issues or warranty claims please contact Ironman 4x4 on our toll-free number 1300 731 137.




Ice cube

FRIDGE / FREEZER

30L
CAPACITY

40L
CAPACITY

50L
CAPACITY

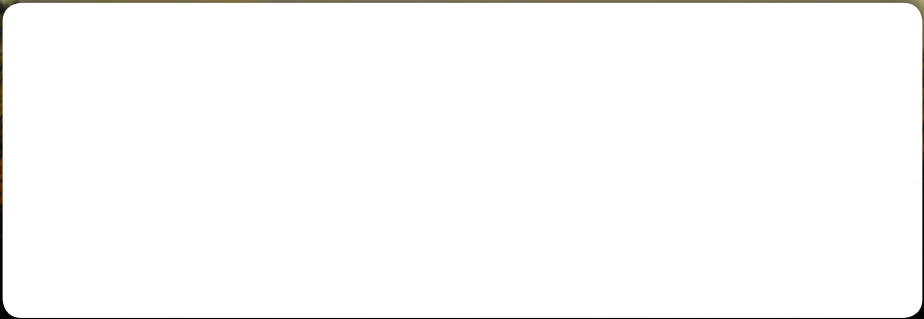

280916