




The **4" WISY Smoothing Inlet** is an all stainless steel device that fits on the 4" inlet pipe in the storage tank. It is used to prevent the agitation of sediment at the rainwater inlet into the storage tank. The smoothing inlet also helps aerate the water as it enters the tank. The inlet pipe rests in the inner diameter of the smoothing inlet. The smoothing inlet should rest on the bottom of the tank.

Below are the dimensions and the specifications for the WISY Smoothing Inlet:



*(Dimensions in parentheses are millimeters)*

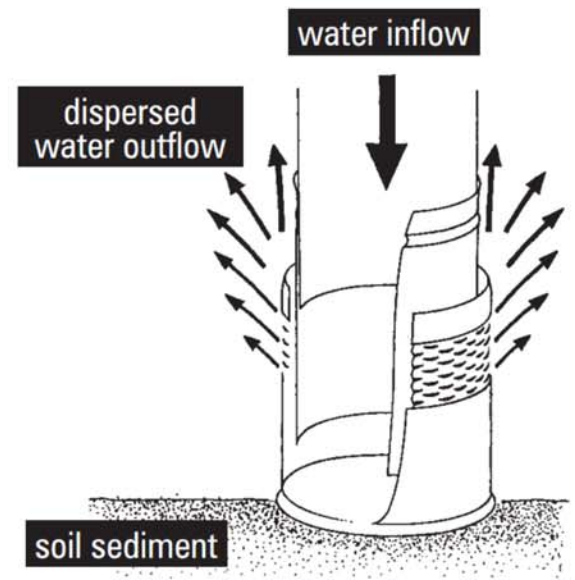


PART NUMBER: EB0300US

Rainwater Management Solutions  
1260 W Riverside Drive  
Salem, VA 24153




The **8" WISY Smoothing Inlet** is an all stainless steel device that fits on the 8" inlet pipe in the storage tank. It is used to prevent the agitation of sediment at the rainwater inlet into the storage tank. The smoothing inlet also helps aerate the water as it enters the tank. The inlet pipe rests in the inner diameter of the smoothing inlet. The smoothing inlet should rest on the bottom of the tank.

Below are the dimensions and the specifications for the WISY Smoothing Inlet:

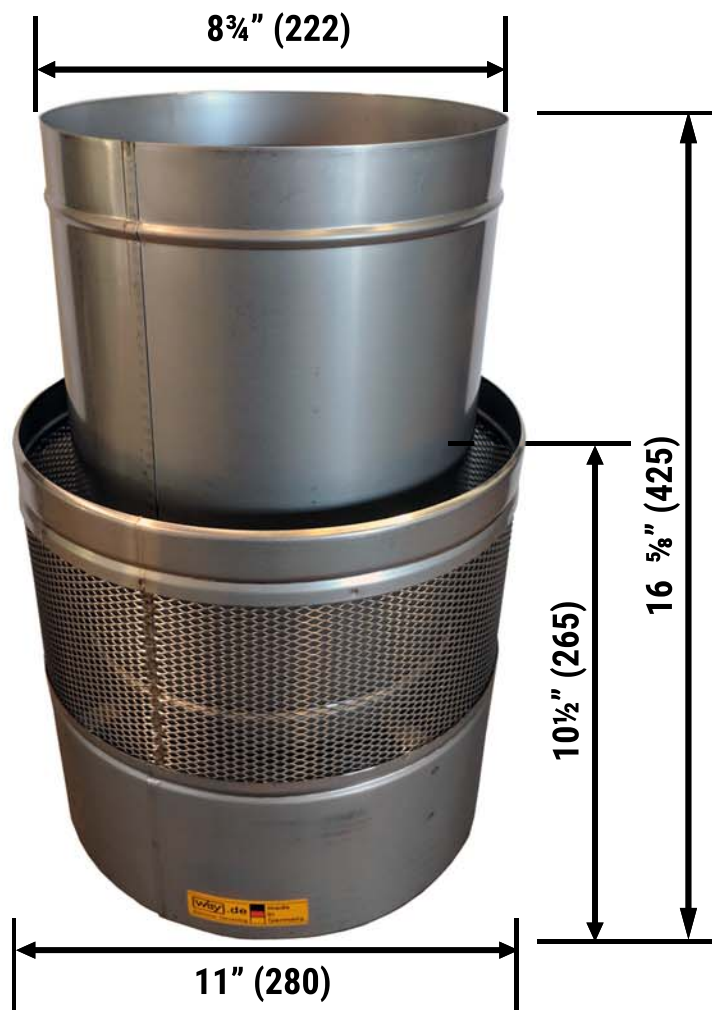

*(Dimensions in parentheses are millimeters)*

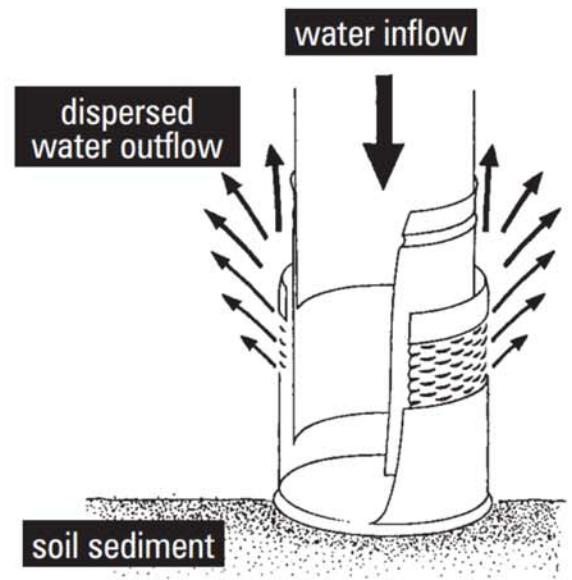

PART NUMBER: EB0304

Rainwater Management Solutions  
1260 W Riverside Drive  
Salem, VA 24153