

A modern bathroom with a marble wall. A large, illuminated mirror is mounted on the wall, reflecting a spherical pendant light. Below the mirror is a white marble vanity with a brass faucet and handles. The text 'INYOUTH'S' is overlaid on the mirror.

INYOUTH'S

Mirror Installation with Drilling

Matters of Safety



READ AND FOLLOW ALL INSTRUCTIONS BEFORE USING THIS MIRROR.



Intended Use

- Use this electrical option only for its intended purpose as described in these instructions.
- Do not use attachments or accessories not recommended by the manufacturer.



Prevent Hazards

- Never drop or insert any object into any opening of the electrical option cabinet.
- This furnishing is designed for indoor use only. Do not use it outdoors.



Risk of Electric Shock

Connect the electrical option cabinet to a properly grounded circuit only. Follow the grounding instructions provided below.



Grounding Instructions:

- This product must be connected to a properly grounded metal permanent wiring system.
- An equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.


IMPORTANT:

When used in bathrooms and all other locations required by the National Electric Code, the electrical option cabinet must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit.

INSTALLATION INSTRUCTIONS

NECESSARY TOOLS

- Electrical Drill
- 1/8" Drill Bit
- Pencil
- Screw x 2
- Wire Connector x 2
- Phillips Screwdriver
- Tape Measure
- Level
- Wall Plug x 2

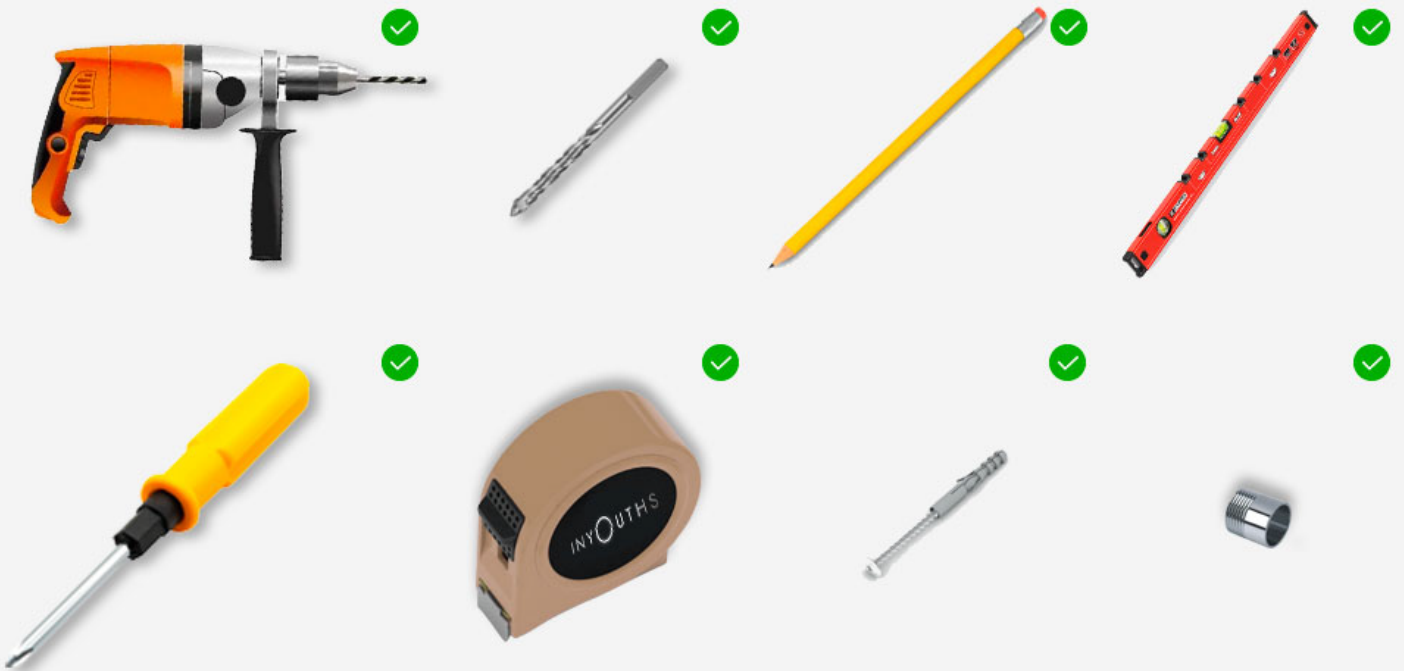

Determine the overall mirror dimensions before installation.

*All measurements & specifications are approximate, and in the event of any changes, we will not notify you separately.

WIRING INSTRUCTIONS



IMPORTANT: ALL WIRING SHOULD BE DONE BY A QUALIFIED LICENSED ELECTRICIAN.

Safety Precautions

Before wiring the mirror, ensure that the power is shut off to prevent electrical hazards.

Electrical Requirements

The electrical option mirror must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit.


When installing the mirror in bathrooms or any other locations as required by the National Electric Code, use a 20 Amp GFI-protected circuit.

Grounding

Connect the mirror to a grounded, metal permanent wiring system. Alternatively, run an equipment-grounding conductor with the circuit conductors and connect it to the equipment-grounding terminal or lead on the mirror.


Power Supply

The mirror requires a 120 VAC (Volts Alternating Current) 20 Amp GFI-protected circuit to operate safely and effectively.

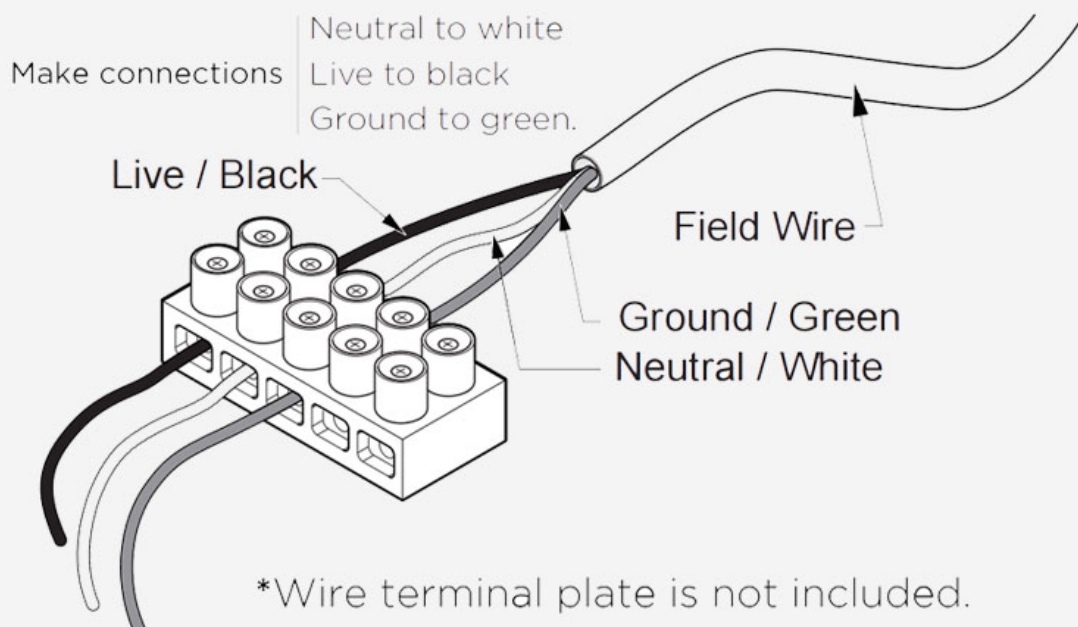


INSTALLATION INSTRUCTIONS

- 1. Placement:** Choose the desired position for the mirror level and mark the location accurately.

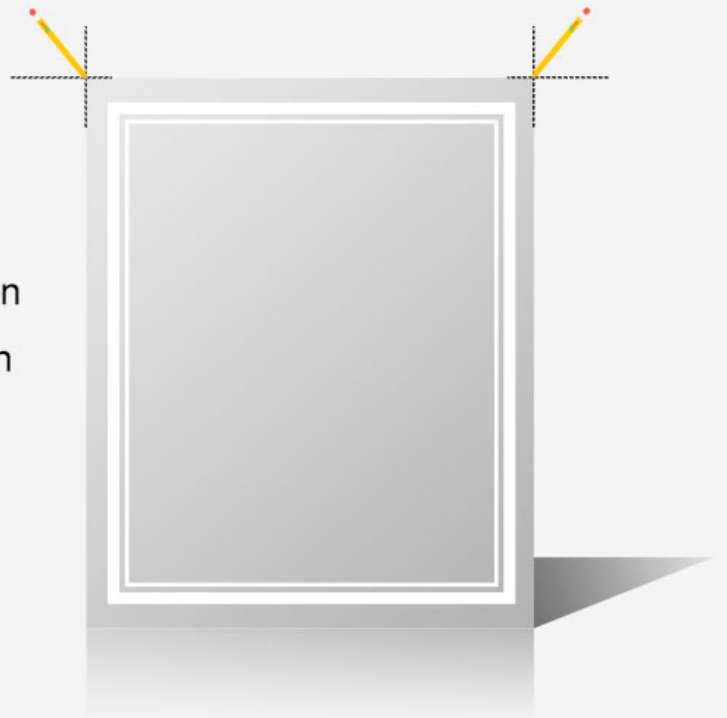


- 2. Support Location:** Measure the center of the holes and mark the drilling locations, ensuring that the markings are leveled.

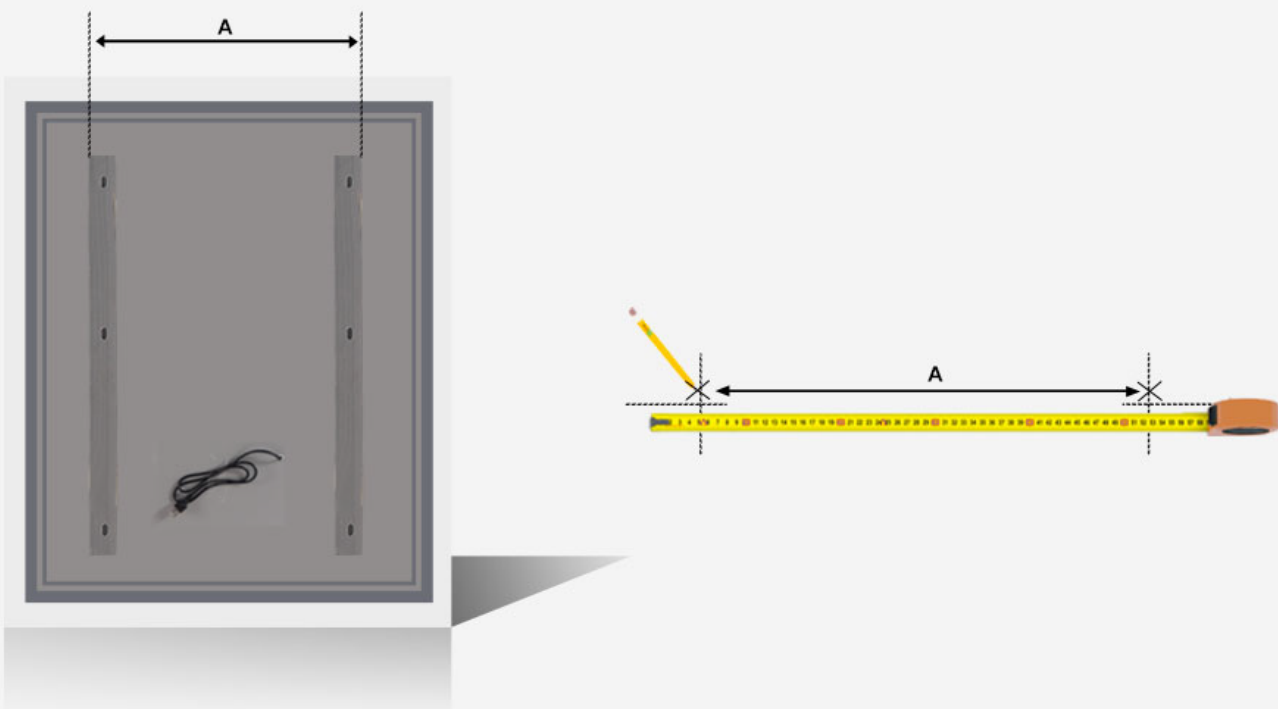


INSTALLATION INSTRUCTIONS

- 3. Install Screws:** Use a drill to create holes at the marked locations. Insert the supplied plugs and screws into the holes. Leave a gap of **2-3mm** between the head of the screw and the wall.

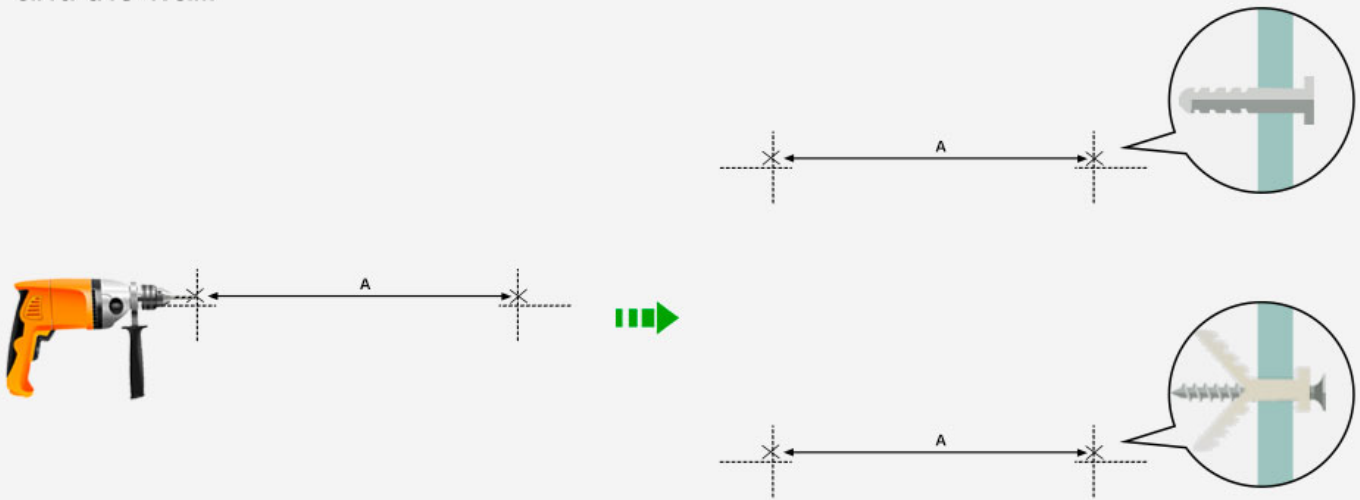

- 4. Hang the Mirror:** Carefully position the mirror against the wall and slide it down as shown in image B.

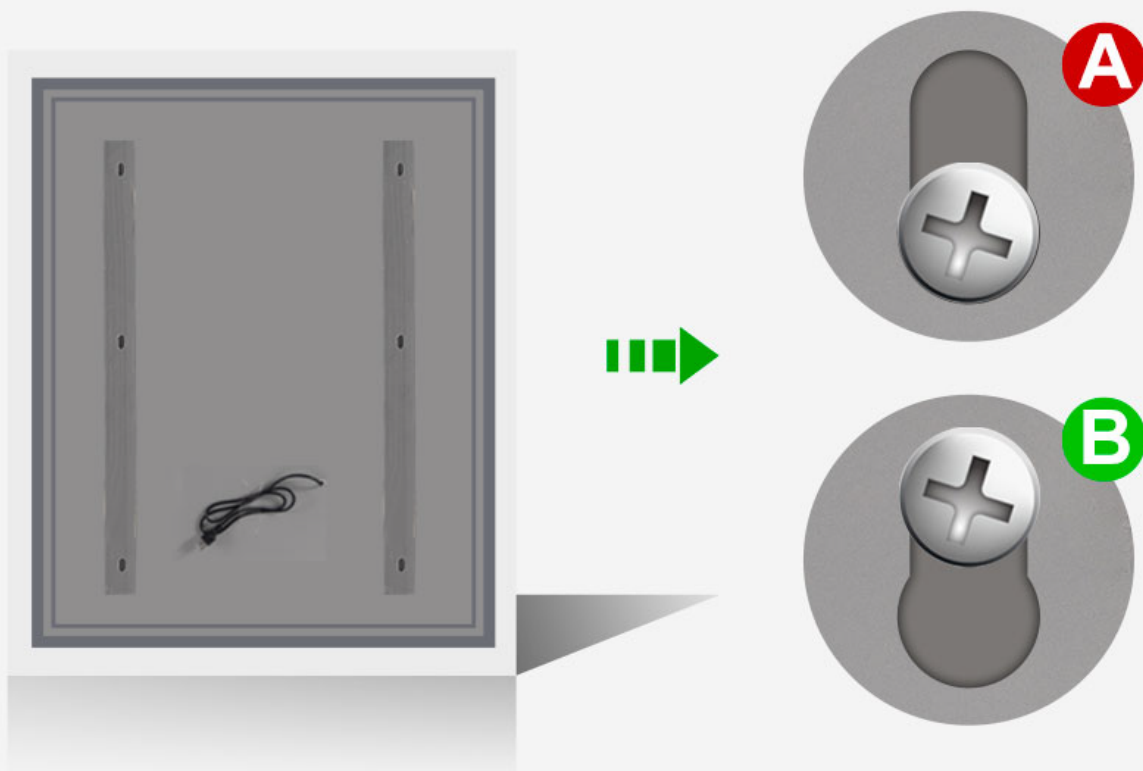

INYOUTH S



INYOUTH S_MIRROR

Download the technical guide at
www.inyouths.com

Showroom Address:
5005 Ontario Mills Pkwy Ontario, CA 91764
E-mail: support@inyouths.com
Tel: +1(323)982 8683