



**Saving Lives, Preventing Accidents, Everyday**

# Reduce Your Liability!



**The World is a Distracted Place**

**Every 7 minutes**

A pedestrian is killed or injured in America. Distracted pedestrians are staring at phones instead of dangerous surroundings

**Over \$2.3 Billion**

Pedestrian related Lawsuits settled by property owners or cities every year

**6% Increase**

Pedestrian fatalities from last year

**ABOUT:** The CAR COMING Pedestrian Alert System provides a Voice and Visual Alert to pedestrians and street traffic when a vehicle exits a parking facility to prevent collision.



## Pedestrian Alert System

### Proactive Protection

- Mitigate RISK
- Avoid lawsuits
- Reduce liability
- Protect pedestrians
- Avoid workers comp

### CAR COMING Features

- Works with any parking system, motion detector, access control
- Fully self-contained: No additional parts or enclosures needed
- Integrated full control system with Timers, Volume Control, Relays, MP3 Voice Board, and Speakers



Power Door Products

(914) 698-5083

[www.PowerDoorProducts.com](http://www.PowerDoorProducts.com)



## Operations

### How the System Operates

An output trigger from a traffic control device activates the system when a vehicle is detected exiting a parking facility or blind corner.


(see types of triggers diagram below)

A PASS Control board is integrated inside the Sign Enclosure.

The trigger is received by INPUT 1 of the PASS Control. This activates the three alerts - Voice, Yellow Flashing, and Backlit Text

The duration of the alerts is controlled by the Activation Timer (0-60 Seconds)

Note: If the end user would like the Backlit Text to also flash, move Output 1 wiring to Output 2

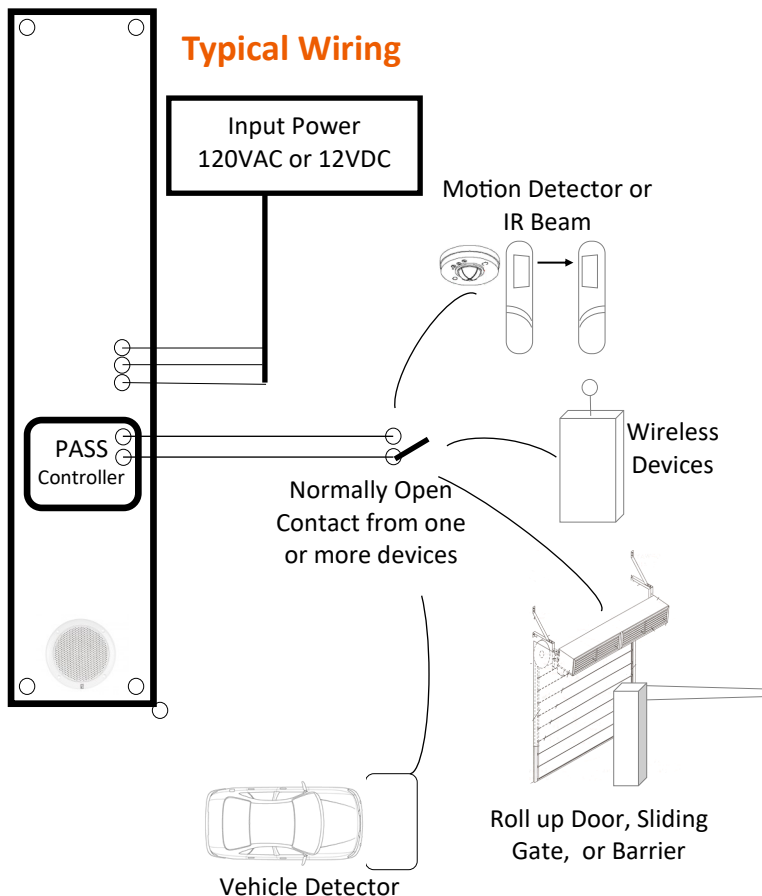

## Specifications

### Dimensions

Height: 40"  
Wide: 10"  
Face: 8"  
Shape: Prism

### Colors

Enclosure: Hammered Copper Vein  
Message Lettering: White  
Flashing Alert: Amber

### Electrical

LED lighting 50,000 hrs  
Power In: 120VAC or 12VDC 2.5A  
Power Out: 12VDC  
Trigger Inputs: Dry Normally Open  
Waterproof transformer (120V/12V) is integrated inside the sign enclosure

### Audio

MP3 USB Card for voice message  
25 Watt Water Resistant Speaker  
10 Watt Amplifier  
Message can be changed easily onsite  
Output is 0-90db

### PASS Control Board (Integrated)

12VDC Input Power  
12VDC Output Power (for motion or detector)  
MP3 Voice Board SD Micro Card  
Activation Timer Dial 0-60 Seconds  
Delay before Activation Dial 0-15 Seconds  
Volume Dial 0-90dB  
Input 1: Activates Sign  
Input2: For Directional Logic Inputs  
Output 1: Steady Output  
Output 2: Flashing 1 sec On/Off Output  
Speaker Output  
Headphone Jack for testing  
Input 1 Test Button  
Input 2 Test Button



Power Door Products

(914) 698-5083

[www.PowerDoorProducts.com](http://www.PowerDoorProducts.com)