




INSTRUCTIONS FOR CONNECTING A 240 VOLT 3-WIRE METER USED ON A 120 VOLT 2-WIRE CIRCUIT

FRONT VIEW OF SOCKET

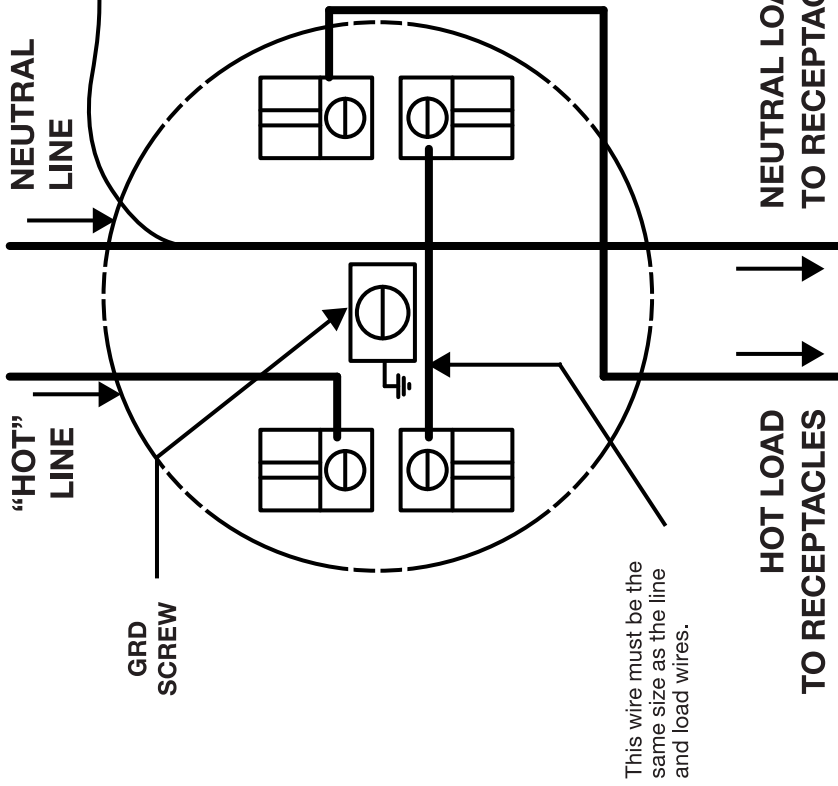

This wire must be the same size as the line and load wires.


NEUTRAL CONNECTION FROM SOCKET

If line neutral is connected to ground screw, it is OK to connect this wire there also. Otherwise this connection must be made to neutral at some other point.

Suggestion: The neutral terminal in the Power Outlet Box, or neutral terminal on the receptacle.

Note: Some clips are vertical instead of horizontal as shown here.

REAR VIEW OF METER

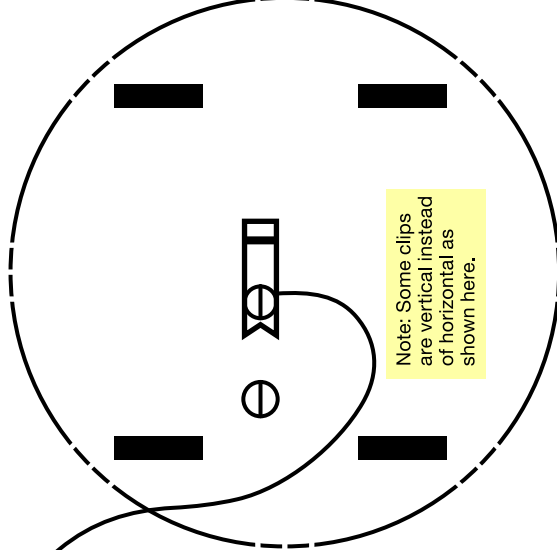

NEUTRAL CONNECTION TO REAR OF METER

Loosen screws and slide clip open as far as possible. Connect a small flexible wire (Wire size #18-22) to the screw on which the clip remains when opened.

WARNING!

Connecting this wire to the wrong screw will trip site breaker, or cause a flash, if not protected by a site breaker.

R-2S-2



HIALEAH METER
Meters you can believe in since 1954.

Best prices. Best service. Best meters.

Call Us Today: 1.800.654.0821