

7" HDMI Multi-Point Capacitive Touch Open Frame Display

UM-760CH-OF





Super slim HDMI-driven LCD monitors are a friendly and affordable way to add a display to any computer or interface system.

Now available with HDMI

Now with the ubiquitous HDMI input for video. Previously only available with the convenience of single cable USB video, the UM-760CH-OF from Mimo Monitors now offers HDMI to supplement where USB video is not supported or inconvenient. With the HID compliant touch screen plus HDMI video, the new UM-760CH-OF can be installed to almost any platform without drivers.

Uniquely, this new monitor line still reduces number of cables. While a typical HDMI touch display will require 3 separate cables, the new HDMI touch displays from Mimo Monitors only require 2 cables. This simplifies connection, and makes for a more attractive installation.

Features:

- Screen: 7" diagonal
- 1024x600 Resolution (WSVGA) LCD
- Viewing angles: 75/75/70/70
- Pixel pitch: 0.15 (H) x 0.15 (V)
- Display colors: 16.7M
- Surface treatment: Hard coating (3H), anti-glare
- Contrast ratio: 700:1
- Luminance, White: 250 CD/m2
- Capacitive 5 point touch panel
- Windows, Linux and Max OS X* HID support

Applications:


- POP/POS
- Secondary screen for productivity
- Gaming and entertainment
- Light industrial shop-floor automation
- Digital Signage
- Video Conferencing




Product Specifications

DISPLAY SECTION	Display	7" diagonal	
	Resolution	1024×600	
	Luminance, White	250 CD/m2	
	Contrast ratio	700:1	
	Aspect Ratio	16:9	
	Viewing angles	75/75/70/75	
Multi-Point Capacitive Touch	Touch Panel	Capacitive 5 point	
	Supports	Windows, Linux and Mac OS X* HID	
	Power Consumption	4 watts	
	Mounting	4 Side Ears	

Dimensions and Mechanical Specifications

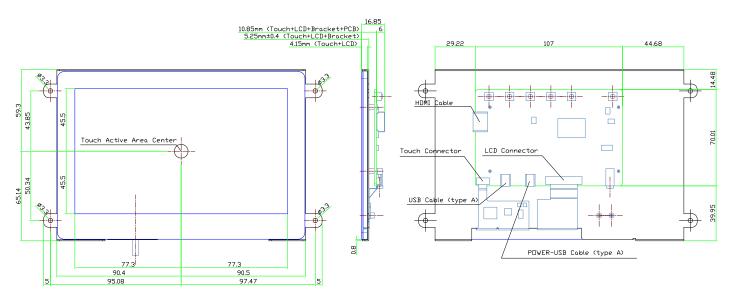

Index of Button Layout

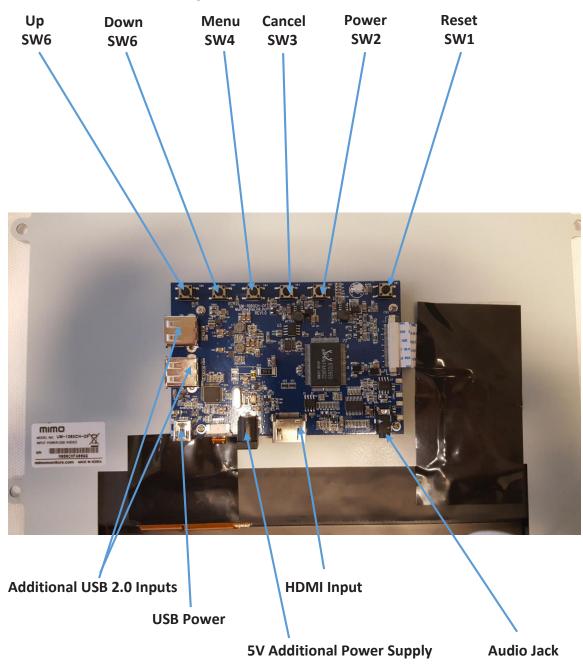

Mimo Monitors

743 Alexander Rd. Suite 15 Princeton, NJ 08540

info@mimomonitors.com

Sales: **1-855-YES-MIMO (937-6466)**