



**Burson Soloist 3X Performance (M-120X)  
Headphone Amplifier / Pre Amplifier**

**User Manual**

*Register for warranty Ref. page 6 for details*

## ***Thank You.***

All of us at Burson Audio would like to say thank you, and congratulations for purchasing the Burson Soloist 3XP. We sincerely believe that your Burson Soloist 3XPP is an intelligent investment that will bring you many years of musical enjoyment and satisfaction.

We understand how eager you are to begin listening and we want you to become familiar with the full capabilities of the Burson Soloist 3XP. However, before powering on the device, we encourage you to look through the manual.

## ***Team Burson***

The less the equipment tampers with the music, the greater the music becomes. This has been the core design philosophy of Burson Audio since 1996. If the equipment is honest and transparent then the proper tempo, dynamics and tone will materialize as a natural expression of the music and it becomes unnecessary to flavor the original sound. We believe that this ideal can never be achieved through standard circuitry building blocks such as opamps, IC regulators or even standard transformers. Instead we work towards this ideal through the research and development of customized solid-state circuitries that are developed specifically to suit our applications. Only then will each and every component involved be pushed to their performance peak. And only then will the end result be consistent with our idealism.

***Team Burson***

## ***XLR to RCA Output:***

To achieve an ideal sonic performance, the XLR outputs of the Soloist 3XP are direct coupling. ie. It has no coupling capacitors or transformers on the audio signal path.

However, direct coupling outputs are not compatible with off-the-shelf XLR to RCA adaptors like the ones showing below. Using such adaptors to connect the C3X to any single-ended amplifier with RCA inputs will damage the internal opamps of the C3XP.



Therefore, to safely connect the Soloist 3XP to any single-ended amplifiers, please use the transformer type of adapters below.



## ***Unpacking***


After carefully unpacking your Burson Soloist 3XP, inspect for any shipping damage and call your dealer immediately if any is found. Do not plug your Burson Soloist 3XP into any outlet if you find shipping damage. Please save all packing materials so the unit can be easily and safely shipped if the need arises.

## ***The Accessories***


- Soloist 3XP Headphone Amp / Pre Amp / DAC
- External Power Supply 24V 3A
- USB Data cable
- Remote control unit
- Hex Key / Spare Fuse / Spare IC opamps for troubleshooting

## Basic Setup


### Four Easy Steps to Setup Your Burson




Scan this QR code or visit the link below to download your user manual and warranty registration instructions:  
[www.bursonaudio.com/downloads/](http://www.bursonaudio.com/downloads/)




Plug the 24V barrel plug into the Burson.



Connect the figure 8 power cable to the power supply.



Plug the power cable into your wall socket and power up your Burson.

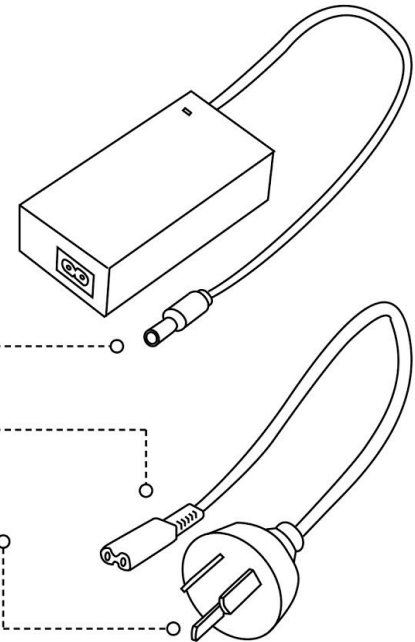

# Connections



## ***Break-in, Warm-up and Caring***

The sound of the Burson Soloist 3XP improves steadily within minutes after powered-up. Depending on the resolution of the system and the attentiveness of the listener, you may find that the sound continues to improve over the first several weeks of operation.

Never, connect or disconnect the headphone jack or the RCA cables from the Soloist 3XP while music is playing. This could damage the Soloist 3XP. After your listening session, please disconnect the headphone jack from the Soloist 3XP to prolong the working life of its headphone output socket.

## ***Menu Items***

Input	XLR	Standard Line Level
	RCA	Standard Line Level
Output	Headphone Out	
	Pre Out	
Gain Level	High* / Medium / Low	High / Low

## ***Headphone Power Amp Mode***

You can bypass the internal volume control of the Soloist when using an upstream DAC or preamp that already controls volume.

Please follow the steps below to enter and exit this mode.


1. Check your connections and minimise the volume of your preamp.
2. Select the correct input on the Soloist menu.
3. Hold the menu button of the Soloist for 12 seconds. Its screen will display a Bypass logo.
4. In this mode, the only setting you can adjust is the gain selection. Other functions are inaccessible for your safety.
5. Hold the menu button for 12 seconds again to exit this mode.



## Opamp Change & Upgrade

The Burson Soloist 3XP allows opamp changing to customise its sound to the owner's preference. When changing opamps, please be aware of the following:


1. The opamp power supply voltage in the Burson Soloist 3XP is +/-15V
2. There are 4 dual opamps inside the Soloist 3XP
3. Please refer to the following diagram for the position and correct orientation of the opamps.

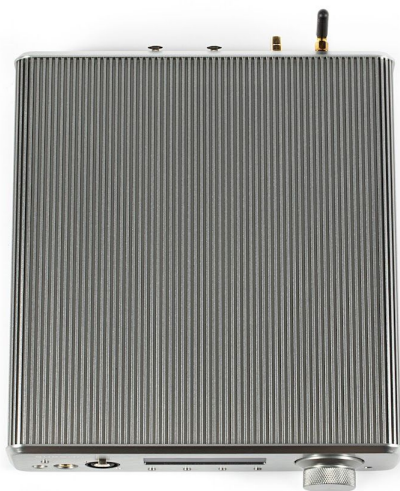


1



2

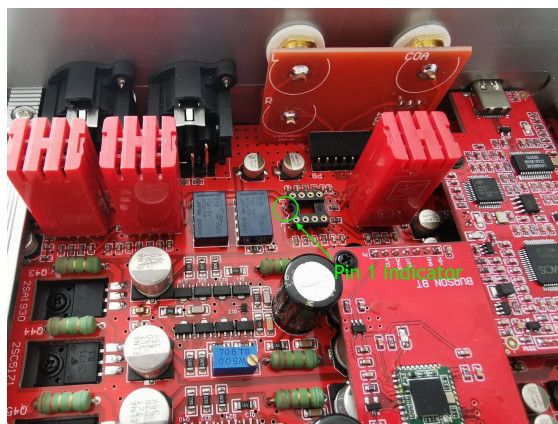

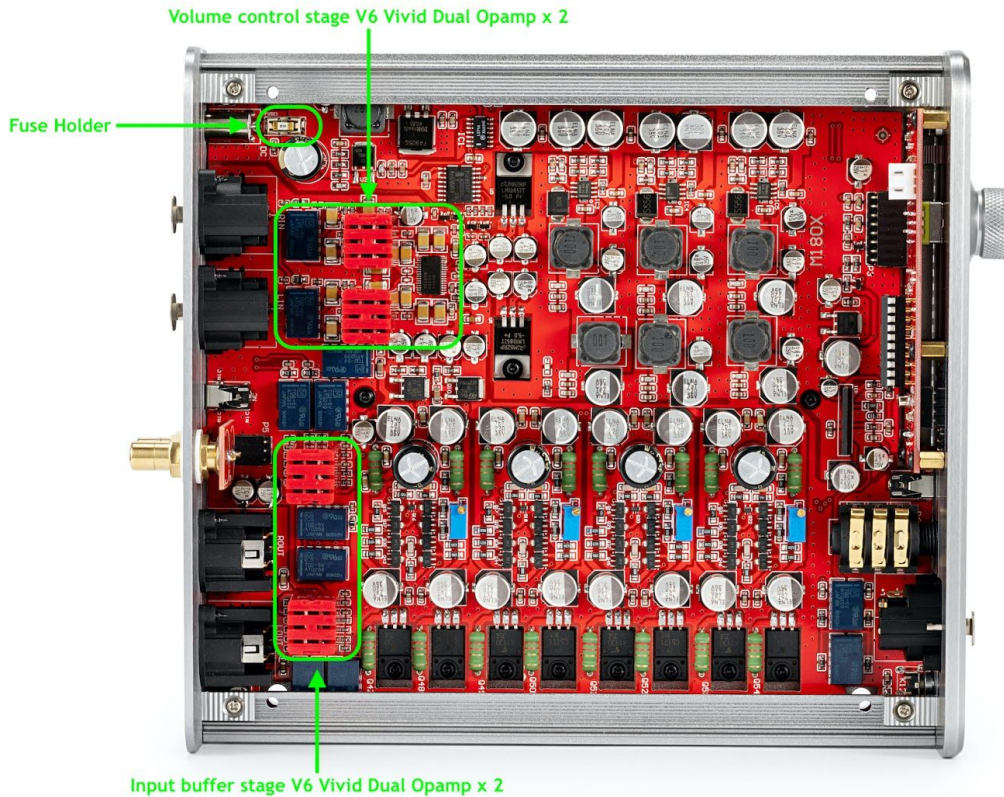

## ***The Initial Powering up***

Make sure volume control has been turned to minimal when using your Soloist 3XP for the first time. Always power on your source machine first and your power amp last. When powering down your system reverse the steps.

## ***Free Warranty Extension***

All Burson Audio products are covered by 24 months + 12 months of warranty (See conditions below).

<https://www.bursonaudio.com/warranty/>.

## ***Warranty Conditions***

Burson Audio warrants that this product shall be free from defects in materials and workmanship for: The warranty period begins at the date of sale and is subject to the following requirements and understandings:

1. This is a non-transferable warranty.
2. This product is only warranted in the country of original sale by Burson / authorised dealer.



3. The product must not have been modified in any manner whatsoever, or the warranty is immediately voided.
4. The product must not have been stored in a humid, damp environment; nor subjected to weather, water, or salt spray.
5. During the warranty period, Burson will replace a defective Burson Soloist 3 with a similar available product, at no cost to the owner for labour, materials, and shipping charges from Burson.
6. Burson shall not, under any circumstances, be liable for any incidental or consequential damages arising from the loss of property or other damage or losses due to the failure of a Burson Soloist 3. Burson will not pay for loss of use or inconvenience caused by the failure of a Burson Soloist 3. Burson will not pay for damage caused to other audio components caused by the failure of the Burson Soloist 3 within the limits allowed by Australian Law.
1. The compatibility between our USB receiver and your computer is dependent on software drivers provided to Burson by the USB chip manufacturer. Therefore Burson cannot guarantee the compatibility of our USB receiver during or after the warranty period.