


# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### DUCATI XDIAVEL

#### REAR TURN SIGNALS

- 1 Remove seat from bike
- 2 Remove rear bolt on tank with 8mm socket (picture 1)
- 3 Prop tank up
- 4 Locate 4 pin white connector and unplug (picture 2)
- 5 Take new wire harness provided, and plug into stock connectors (picture 3)
- 6 Feed 2 pig tailed wires under seat bracket and underneath passenger seat
- 7 Remove 2 bolts on top of reflector cover with 3mm allen key/ socket (picture 4)
- 8 Remove 2 lower bolts underneath reflector cover with 6mm allen key/socket and slide out cover (picture 5)
- 9 To install new signals, slide stock bolts through powder coated plate, two provided spacers, and bolt onto bike (picture 6)
- 10 Plug connectors from turn signals into provided wiring harness

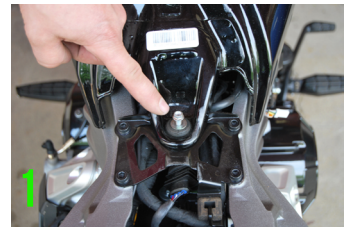

# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### REAR TURN SIGNALS

- 11 Tighten bolt on tank
- 12 Zip tie harness if necessary
- 13 Put seat back on bike

