


INCLUDED IN KIT


- x2 Headlights
- x2 Ballasts
- x1 Wiring Harness
- x1 Packet Connector Protector
- x1 H4 to H13 Adapter

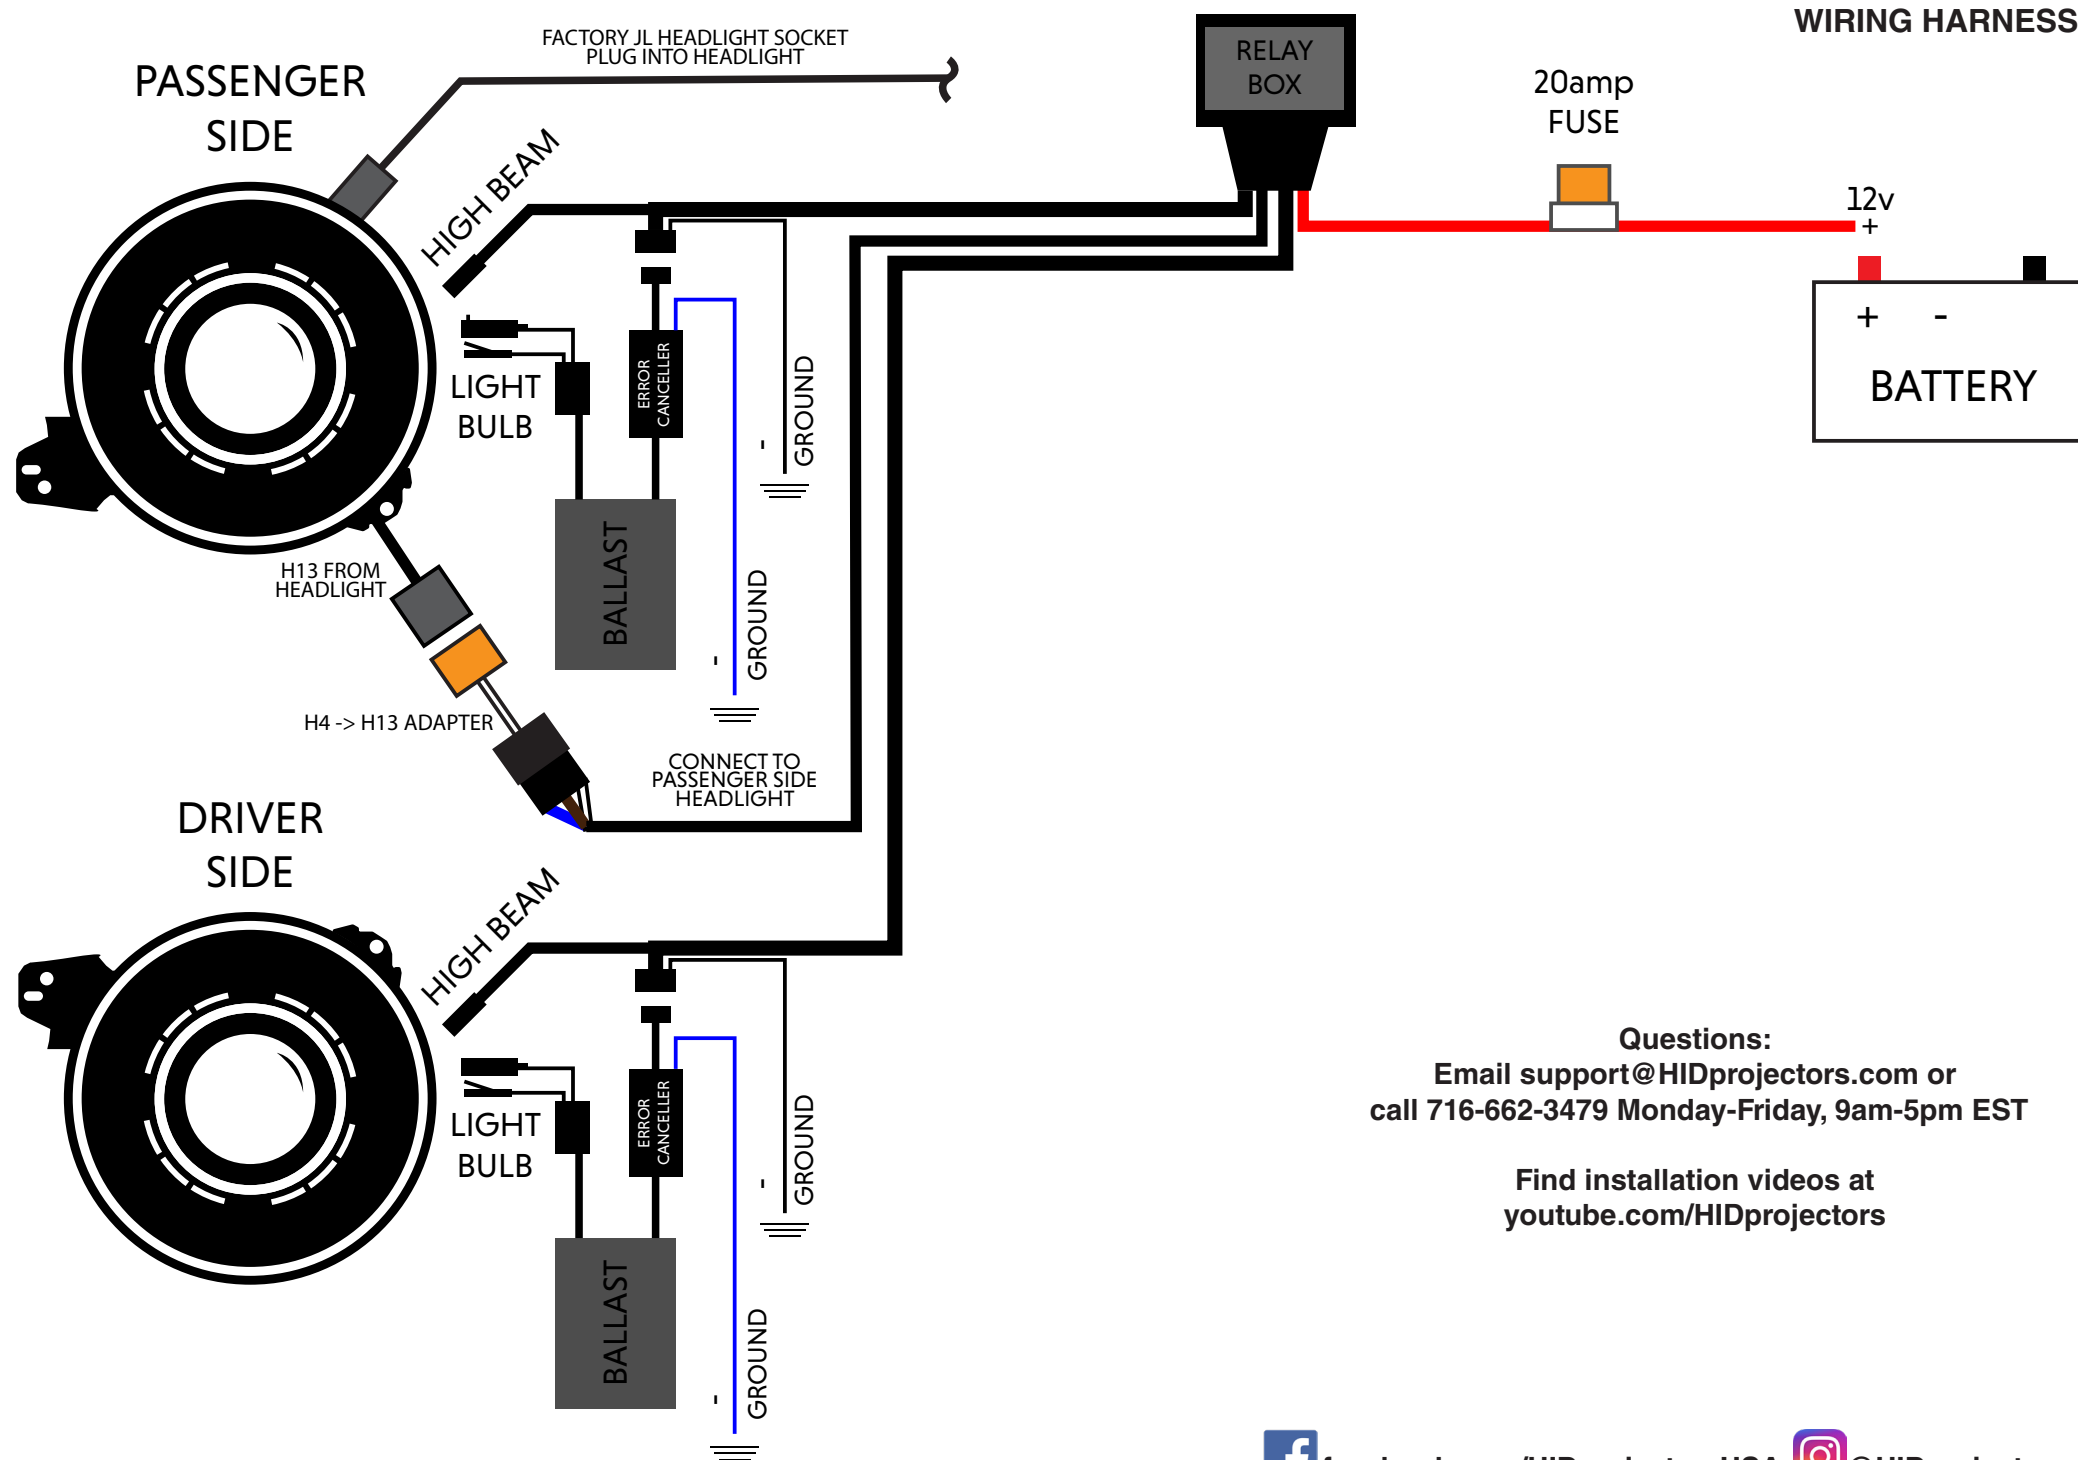



Questions:
Email support@HIDprojectors.com or
call 716-662-3479 Monday-Friday, 9am-5pm EST

Find installation videos at
youtube.com/HIDprojectors



Angel Eyes / Halos / Devil Eyes

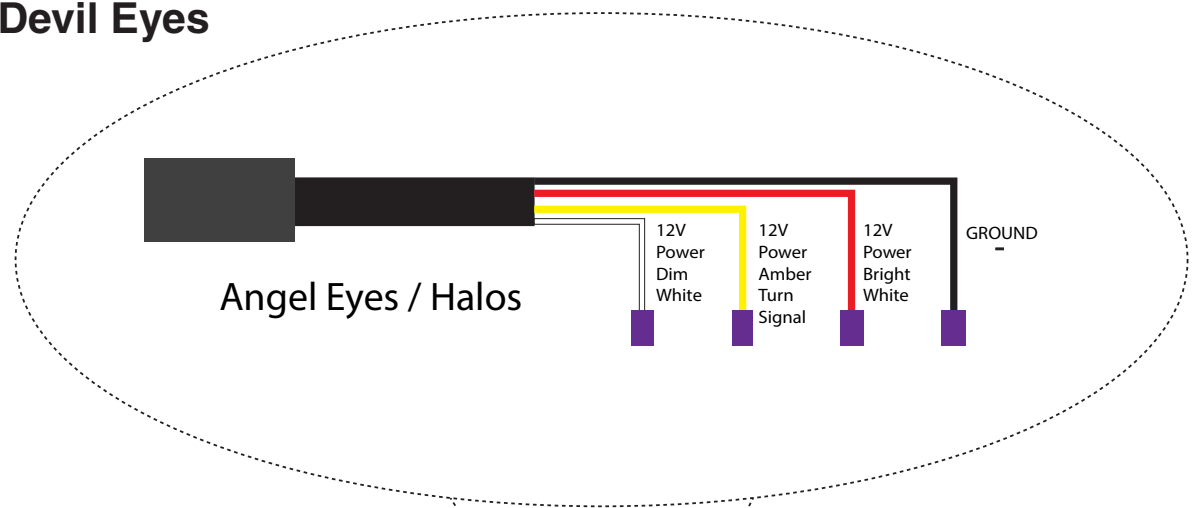

Passenger Side Headlight

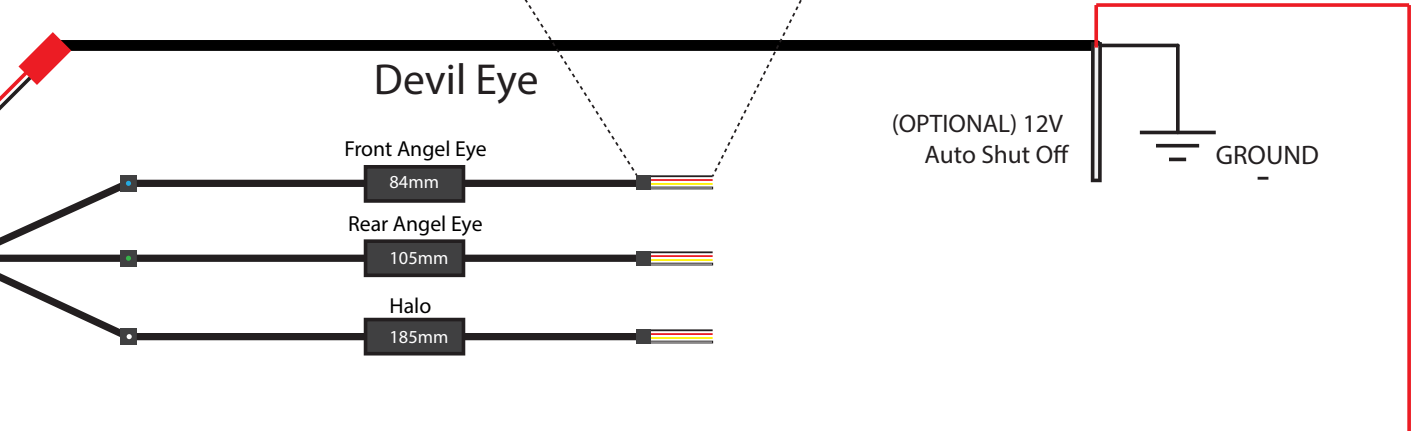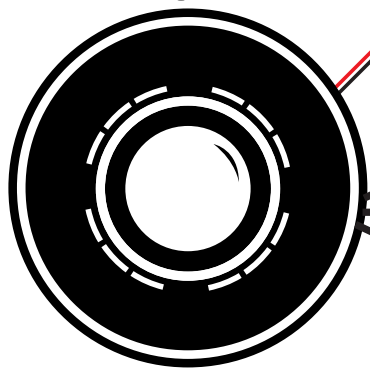

Driver Side Headlight

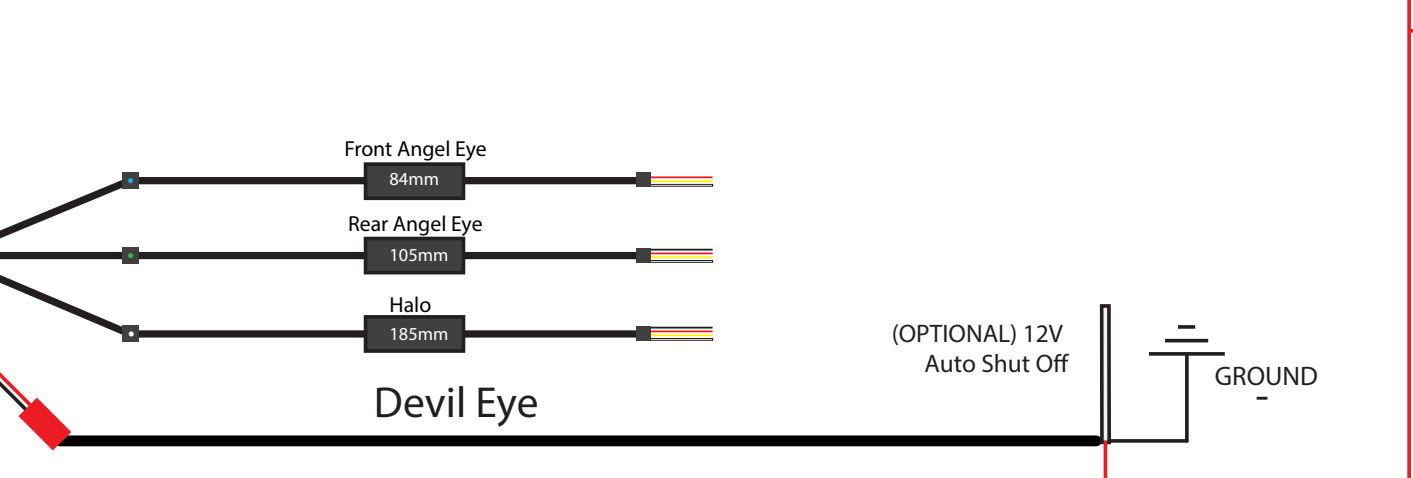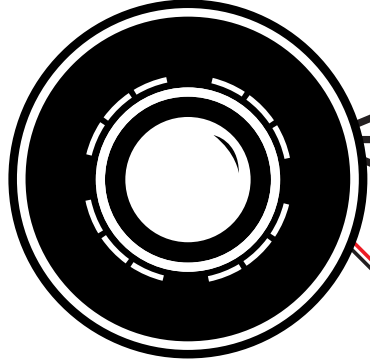

Devil Eye Use

Devil Eye must be OFF when headlights are in use. Running the Devil Eye at the same time as the HID bulb may result in premature failure to the LED on the Devil Eye. Connecting the white wire on the devil eye to the low beam of your headlights will automatically turn off the devil eye when the headlights are powered on.

Angel Eyes / Halos

Connection to Headlights

Each LED driver must be attached to the matching labeled connector to avoid possible damage. Each connector is color coded for ease of use.

Blue Connector: Front Angel Eye

Green Connector: Rear Angel Eye

Orange Connector: Halo

Connection To Power Source

When connecting to a 12V switched power source, we recommend a switch panel or toggle switch.

As seen in the magnified portion of the diagram, each wire can be connected as follows.

White: 12V Power, Dim White Light

Amber: 12V Power, Amber Light, Turn Signal

Red: 12V Power, Bright White Light

Black: Ground

The white and red wires each activate the white color, but at different brightness levels. If both red and white wires are powered, the dim white will take priority.