




Guitar Type | Ibanez RG
Pickup Configuration | HSH
Volumes | 1x Master Volume
Tones | 1x Master Tone
Switch | 5 Way Blade
Orientation | Right Handed
Additional items | Auto-Split Jem style

- Position 1 - Bridge humbucker
- Position 2 - Bridge humbucker coil split with middle single coil parallel
- Position 3 - Middle single coil
- Position 4 - Neck humbucker coil split with middle single coil parallel
- Position 5 - Neck humbucker

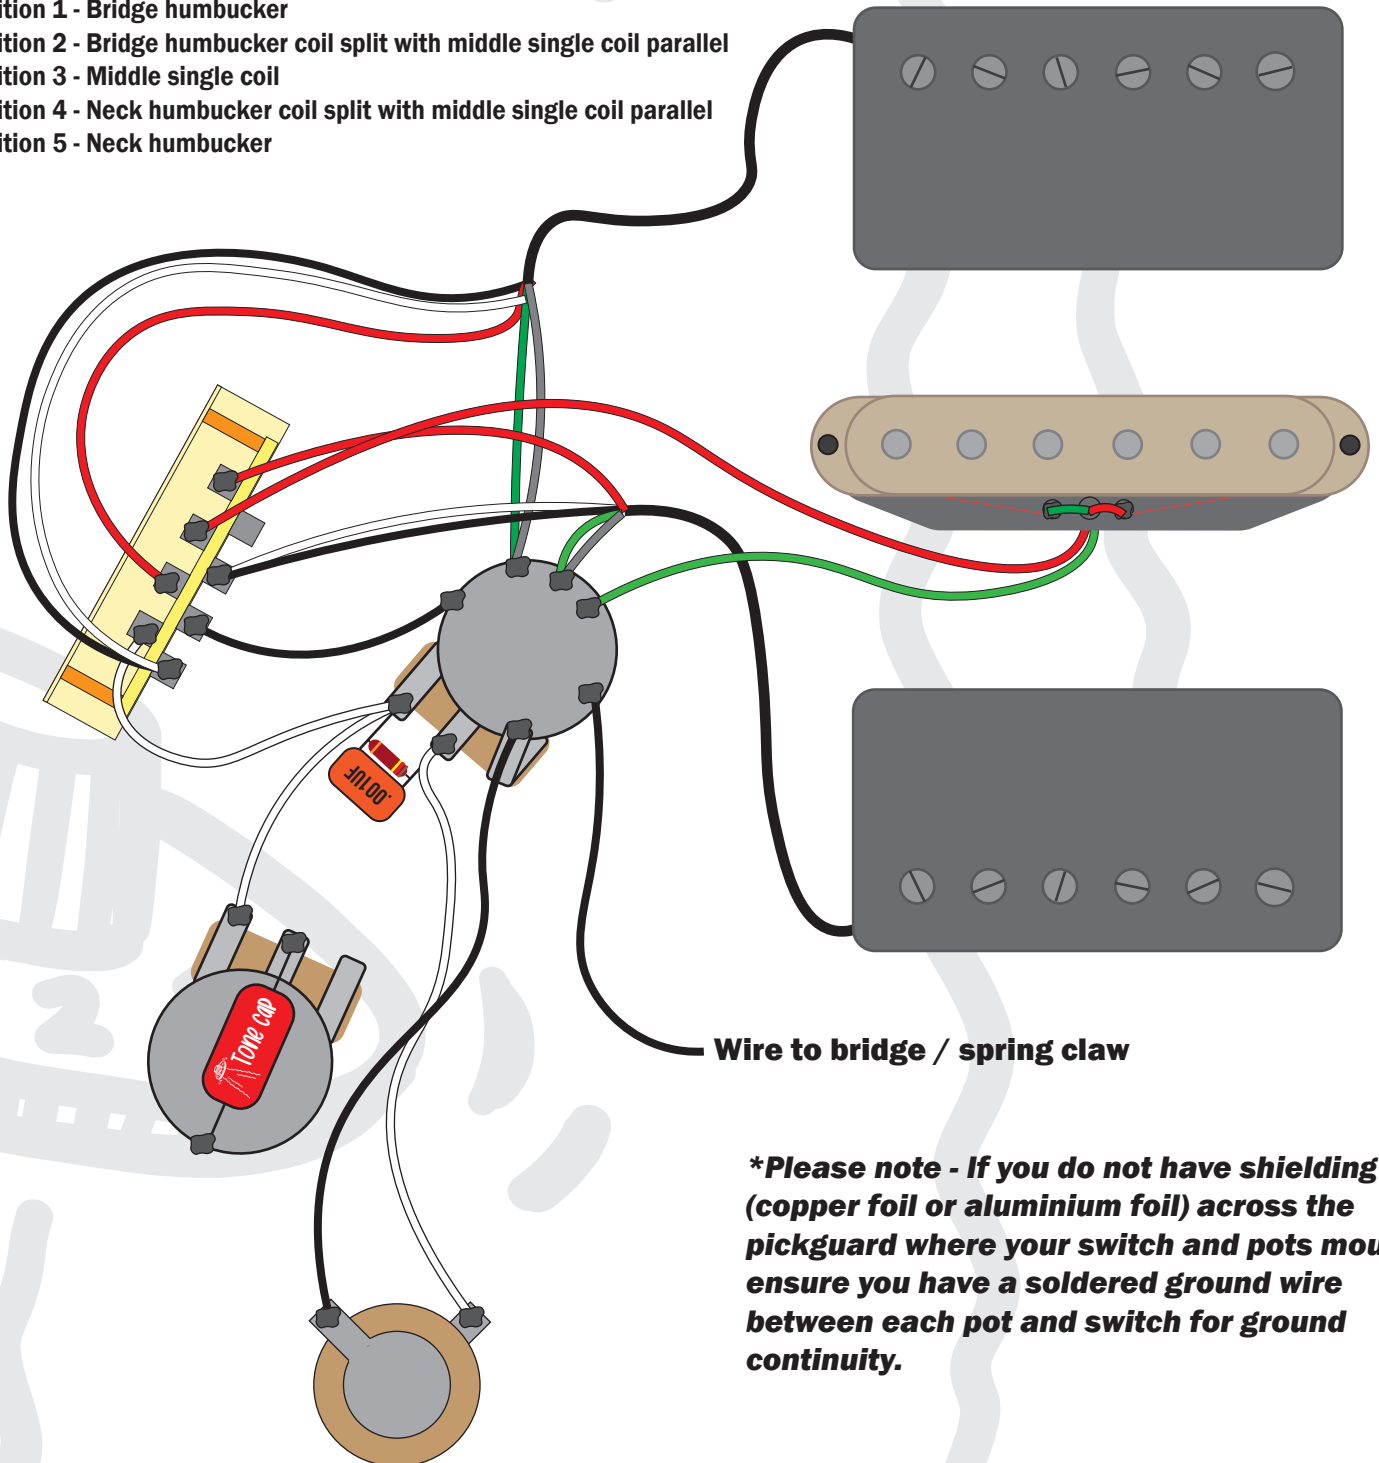

***Please note - If you do not have shielding (copper foil or aluminium foil) across the pickguard where your switch and pots mount, ensure you have a soldered ground wire between each pot and switch for ground continuity.**

This diagram has been drawn with DiMarzio humbucker 4 conductor wire colour code in mind. I opted to use DiMarzio colour coding as they're likely the most popular pickup brand for Ibanez models. But please bare in mind that the colour code might be different to this diagram if you have a different brand of pickups. Please refer to the pickup manufacturers colour coding before installing.

Important note

Please take care of yourself and your guitar when carrying out any guitar wiring work. James' Home of Tone cannot be held responsible for any damage or injury caused by dangerous or incorrect techniques used. If possible, support your local businesses and have your trusted local guitar tech carry out your re-wire! Imagery is copyright of James' Home of Tone 2023.