


## C4 GSM Controller Basic Wiring



Gate or Garage Door with one 'Open' terminal

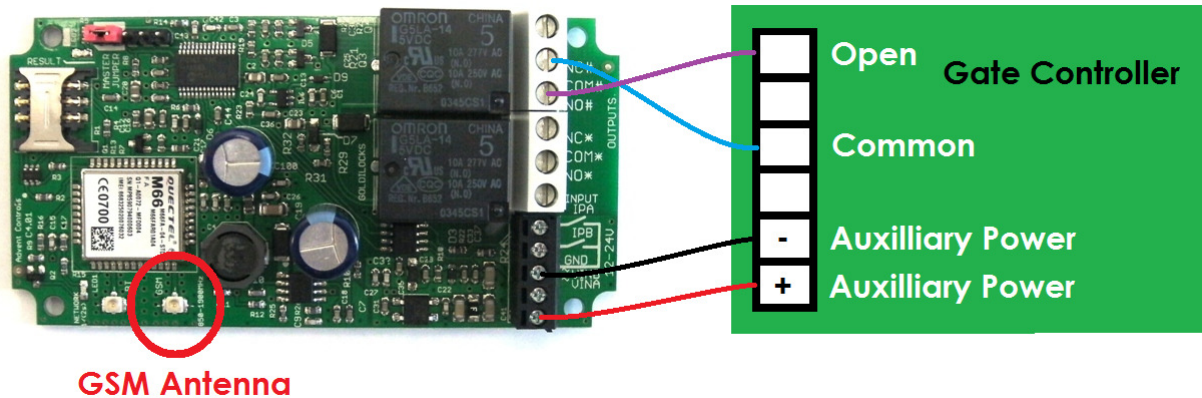


For gates and garage door openers with just one 'open' connection just the # terminals are used. Connections are made from the COM# terminal and NO~ terminal.

The following commands are used (sent in a SMS to the SIM card number):

Master <your number>.	...sets your phone up as with admin rights
Add <number>.	...adds more numbers to the system
Open	...open and closes the gate/door
Latch	...holds the door/gate open until 'OPEN' or 'OFF#' sent

Gate or Garage Door with Open and Close Terminals

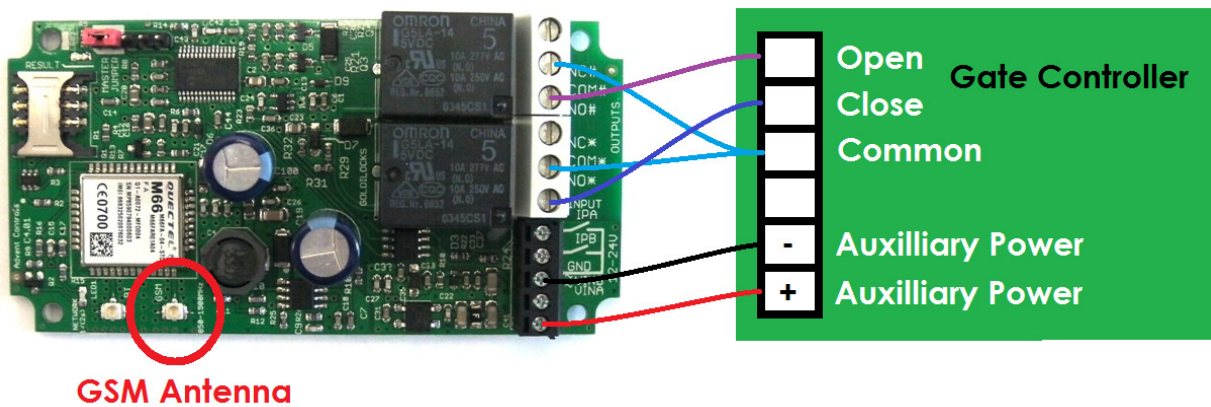

For gates, roller shutters and garage doors with an open and a close terminal the second relay is used. This allows the GSM unit to close the entry also.

The following commands are used (sent in a SMS to the SIM card number):

Master <your number>.	...sets your phone up as with admin rights
Add <number>.	...adds more numbers to the system
Channel alt	...allows first call to open shutter, second call to close it
Open	...opens the gate/door
Close	...closes the gate/door

Rlymode ring	...activates output relays whilst phone is ringing
Rlytime xxx.	...sets the relay output pulse time to xxx seconds