

Power Converters

- ST-LA108-TPQ** 0.8A@12VDC
- ST-LA115-TPQ** 1.5A@12VDC
- ST-LA130-TTQ** 3A@12VDC, 1.5A@24VDC

ENFORCER® Power Converters “step down” voltage, converting low-voltage AC or DC into regulated DC outputs. These converters are useful for DC CCTV cameras, access controls, and many other applications where low-voltage DC output is required.

Features:

- Three models available, providing varying degrees of low-voltage DC output
- Built-in overload protection
- Regulated and filtered output
- Green LED indicates power input

ST-LA108-TPQ and **ST-LA115-TPQ** only:

- 2.1mm DC Plug with pigtail for simple and quick installations

ST-LA130-TTQ only:

- Red and Blue LEDs indicate power output



ST-LA108-TPQ /
ST-LA115-TPQ




ST-LA130-TTQ

Specifications:


Model	ST-LA108-TPQ	ST-LA115-TPQ	ST-LA130-TTQ
Input connector	Terminal block		
Output connector	2.1mm DC Plug		Terminal block
Input voltage	16~28 VAC/VDC	18~28 VAC/VDC	18~24 VAC/VDC for 12VDC 24~28 VAC or 26~28 VDC for 24VDC
Output voltage	12VDC		12/24 VDC
Output current	0.8A	1.5A	3A@12VDC, 1.5A@24VDC
LED Indicators	Green: Power input		Green: Power input Red: 12VDC Power output Blue: 24VDC Power output
Current protection	Built-in		3A PTC Fuse
Overheat protection	Built-in		
Overload protection	Built-in		
Dimensions	1 ¹⁵ / ₁₆ "x1 ⁷ / ₁₆ "x1 ⁵ / ₁₆ " (50x37x24 mm)		2 ¹ / ₂ "x1 ⁷ / ₈ "x1 ⁵ / ₁₆ " (64x48x24 mm)

Sample Applications:

ST-LA108-TPQ / ST-LA115-TPQ

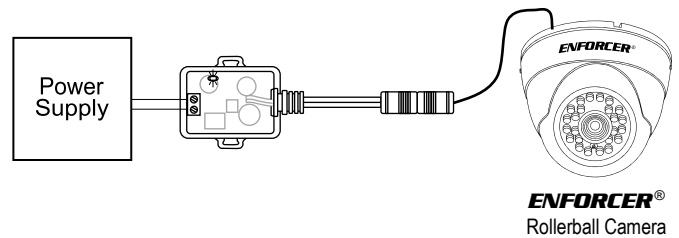

ST-LA130-TTQ

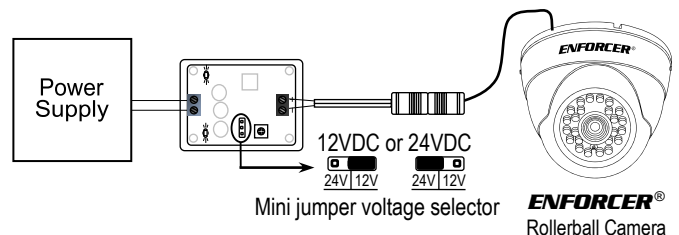

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2014 © SECO-LARM U.S.A., Inc. All rights reserved. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PiST-LAxxx-TxQ_1407.docx