





# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### MV AGUSTA BRUTALE MY17

#### FENDER ELIMINATOR

- 1 With 4mm allen key or socket, remove (2) bolts to take seat off (picture 1)
- 2 With 4mm allen key or socket, remove (2) bolts to loosen side pods, but do not remove side pod (picture 2)
- 3 With a 2.5mm allen key or socket and Philips screw driver, remove (2) bolts and (1) screw. This filler panel will expose harness where you will route harness from swing arm (picture 3)
- 4 Lift up on side pod to sneak connector through and slide NRC turn signal tab through and sandwich between seat frame and side pod (picture 4)
- 5 Reinstall stock bolts to tighten turn signals down
- 6 Remove wiring harness cover along swing arm (picture 5)
- 7 Unplug (3) connectors inside swing arm

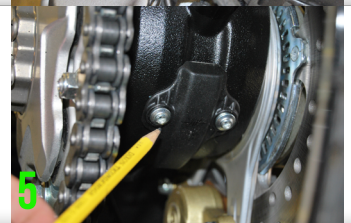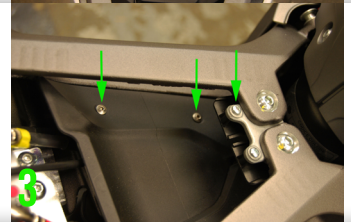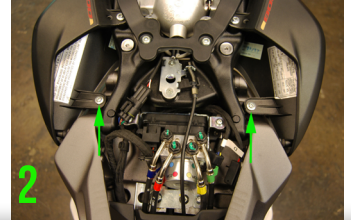
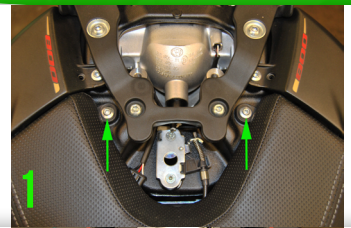


# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### FENDER ELIMINATOR

- 8 Remove (3) bolts to take off shield on inside of swing arm (pictures 6,7,8)
- 9 Reroute harness up swing arm, through filler panel, and up underneath seat (picture 9)
- 10 To install NRC license plate bracket, loosen (2) lower bolts and remove (1) upper bolt on both sides of the passenger pegs with a 6mm allen key or socket (picture 10)
- 11 Under bike, use a 2.5mm allen key or socket to remove (1) screw (picture 11)
- 12 Take NRC license plate, sandwich sides between top bolt on passenger pegs and take new 3mm screw and thread into top (pictures 12/13)
- 13 Use stock bolts and reinstall on swing arm using provided steel spacers (picture 14)
- 14 Run plate light connector up through plastics
- 15 Plug in (3) connectors and test before putting seat back on

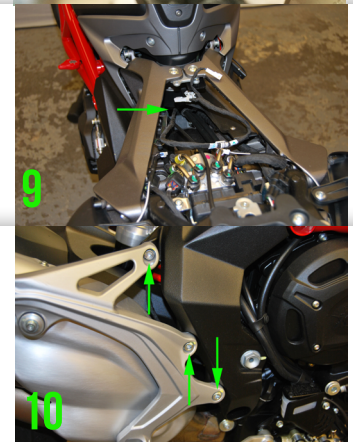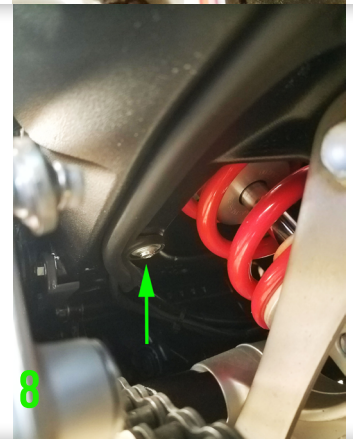



# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### FENDER ELIMINATOR

- 16 Zip tie excess wires if necessary
- 17 Reinstall filler panel using stock hardware
- 18 Reinstall seat with stock hardware

