
## **JACK MASON**

# JM-A502

# Avigator Meca-Quartz - 42MM

Quartz Chronograph

## Time Module Caliber No. VK63 Chronograph Function

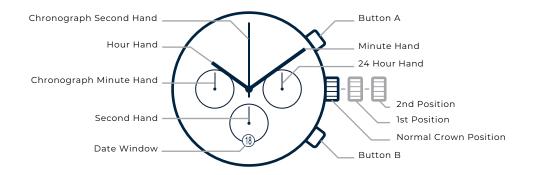

### Setting The Time

- 1. Pull the crown out to the 2nd position.
- 2. Turn the crown to set **Hour and Minute Hands**. (Check that am/pm is set correctly.)
- 3. When the crown is pushed back to the **Normal position**.
  - \*If the crown is pulled to the second position while the chronograph is started, the chronograph hands will continue to move. This is not a malfunction.

#### Setting The Date

- 1. Pull the crown out to 1st position.
- 2. Turn the crown clockwise to set the date.
  - \*Set the date between the hours of 2:00 am to 8:00 pm to ensure the date changes the following day.
- 3. After the date has been set, push the crown back to **Normal position**.

## Using The Chronograph Function

The chronograph can measure up to 60 min and will stop after that measurement.

Measuring time with a Chronograph:

- 1. Press **Button** A to start the chronograph. The **Chronograph Second Hand** will start moving.
- 2. Press Button A again to stop the chronograph. The chronograph hands stop to indicate the elapsed time.
- 3. Press **Button B** to reset the chronograph. All chronograph hands will reset to "0".
- 4. Restart and stop of the chronograph can be repeated as mand times as necessary by pressing Button A

### Circut Reset (After Battery Change)

- 1. Pull the crown to the **2nd Position**.
- 2. Press Button B for two seconds and release the button.
- 3. Push the crown back to normal position
- 4. The Small Second Hand will move at two-second intervals for 10 seconds

It is not necessary to set the chronograph hands after the battery is exchanged.