


JACK MASON

JM-AOPA

AOPA Pilot's Chronograph - 45MM

Quartz Chronograph

Ronda Caliber No. 5030.D Chronograph Function

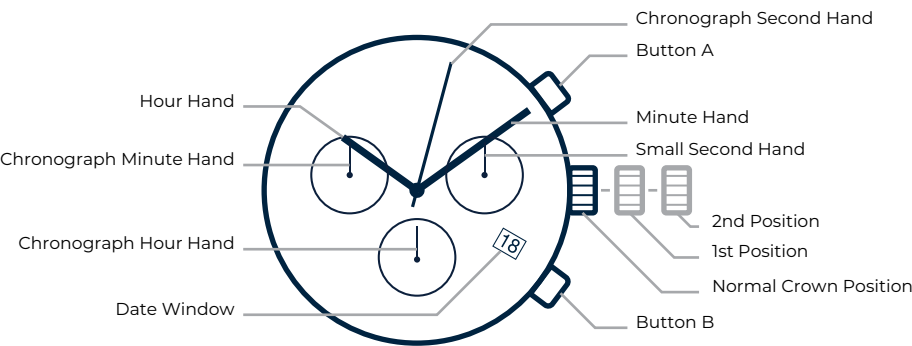

Setting The Time

1. Pull the crown out to the **2nd position**.
2. Turn the crown to set **Hour and Minute Hands**.
3. When the crown is pushed back to the **Normal position**, **Small Second Hand** begins to run.

Setting The Date

1. Pull the crown out to **1st position**.
2. Turn the crown clockwise to set the date.
* Set the date between the hours of 2:00 am to 8:00 pm to ensure the date changes to the following day.
3. After the date has been set, push the crown back to **Normal position**.

Using The Chronograph Function

This chronograph will measure and display time in 1/1 second units up to a maximum of 11 hours 59 minutes 59 seconds. The chronograph second hand keeps continuously for 11 hours 59 minutes 59 seconds after starting.

Measuring time with a Chronograph:

1. The chronograph can be started and stopped each time **Button A** is pressed.
2. Pressing **Button B** resets the chronograph and the **Chronograph Second Hand** and **Chronograph Minute Hand**, and **Chronograph Hour Hand** return to zero position.

Chronograph Reset

This Procedure should be performed when any of the **Chronograph Hands** do not return to their zero position after the chronograph has been reset, and including after the battery has been replaced.

1. Pull the crown to the **2nd Position**.
2. Hold down both **Button A** and **Button B** until the Center Second Hand makes one complete rotation.
3. Press or hold **Button A** until the **Center Second Hand** is at its zero position.
4. Press **Button B** to adjust the next hand (**Chronograph Hour Hand**).
5. Press or hold **Button A** until the **Chronograph Hour Hand** is at its zero position.
6. Press **Button B** to adjust the next hand (**Chronograph Minute Hand**).
7. Press or hold **Button A** until the **Chronograph Minute Hand** is at its zero position.
8. Return the crown to its normal position.