



PIXIE MULTI-WAY SWITCH G3 S2W/BTAS

SMART HOME - digital multi-way switch or dimming control

Application


Ideal for residential designs, commercial interior spaces requiring multiple location device control

Design Specifications

- Digital remote push button control to enable 2 way or 3 way switch or dimming control, 350 watt LED lighting load (minimum 9 watt)
- Complimentary key caps provided to suit most branded switch plates
- Complies to AS/NZS 60669.2, easy to retrofit, dim and switch with ease, with no messy additional wiring circuits required.
- Switch and dimming control is achieved only in conjunction with PIXIE (master) switch or dimmer. All devices must be paired once installed, for functionality.
- Fully compatible with the PIXIE app and PIXIE PLUS app, so with the inclusion of the SAL Gateway and the internet, you can control your PIXIE devices from anywhere in the world.




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Body Colour	Dim (mm)
	S2W/BTAS	240	WHITE	42(L) x 24(W) x 24(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

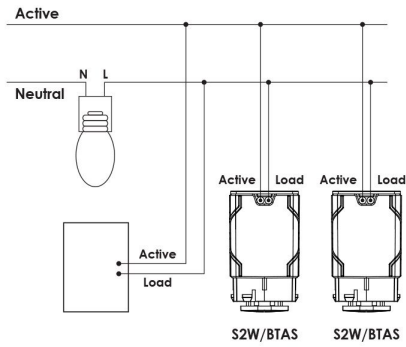

Case Issue	Suggestions
The LED Indicator of S2W/BTAS doesn't light up when pressing the button.	<ul style="list-style-type: none"> Please check the wiring and ensure the wiring is correct Check the connected load and ensure the load is within the power rating Press the button of connected PXE dimmer or switch, ensure it is functioning
The LED Indicator of S2W/BTAS doesn't flash after quickly pressing the button 4 times.	<ul style="list-style-type: none"> Please check the wiring and ensure the wiring is correct Check the connected load and ensure the load is within the power rating Press the button of connected PXE dimmer or switch, ensure it is functioning Ensure the PXE dimmer or switch is at OFF state (the light is off)
The LED Indicator of S2W/BTAS flashes after quickly pressing the button 4 times, but it doesn't pair in the end.	<ul style="list-style-type: none"> Ensure both the PXE dimmer or switch and the PXE Multway Control are in the pairing mode Ensure the S2W/BTAS is within wireless signal coverage of PXE dimmer or switch (within 15 meters in open space, may require closer proximity depending on the installation environment) Try pairing in the App with the phone as this is recommended
The LED Indicator of S2W/BTAS shows it's paired successfully, but it doesn't do multway control.	<ul style="list-style-type: none"> Ensure the S2W/BTAS is within wireless signal coverage of the PXE dimmer or switch (within 15 meters in open space, may require closer proximity depending on installation environment) If S2W/BTAS has to be beyond wireless coverage, please add a PXE signal booster between S2W/BTAS and PXE dimmer or switch to enhance signal coverage

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

