



# REMOTE CONTROLLER

ITEM NO.: **DAX-5049 / DAX-5002**

**DESCRIPTION:**


Working voltage: DC12V/24V

Control current: 18A

Total power: 216 W

Receiving range: 20M


Connecting method: common anode

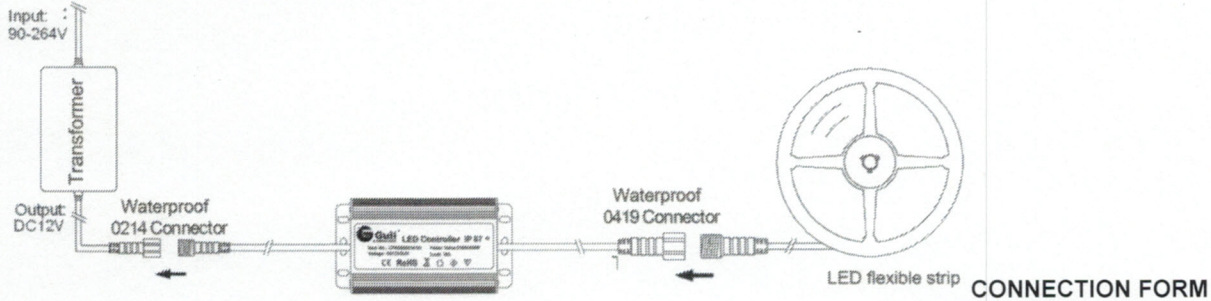

**CONTROLLING FORM:**

1. Functions of Keys:

- Key 1: on/off
- Key 2: single colors mode(7modes)
- Key 3: color changing mode(7modes))/ blue tooth music mode
- Key 4: color modes choice/ music choice
- Key 5: color modes choice/ music choice
- Key 6: turn up(brightness/ speed/ music volume)
- Key 7: turn down(brightness/ speed/ music volume)

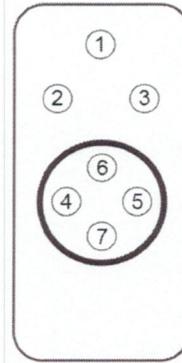

2. How to use

- a. Press Key 1 to turn on/off in any state.
- b. Press Key 2 to activate light single color changing mode..
- c. Press Key 3 once to activate color changing models, changing moles by pressing Key 4/Key 5, changing speed by pressing Key 6/ Key 7.
- d. Press Key 3 twice to activate blue tooth music modes, changing music by pressing Key 4/Key 5 and changing music volume by pressing Key 6/ Key 7.
- e. Matching Code  
 Press Key 2 once within 3 seconds when power on, the light will blink 3 times if matching is successful.  
 Press Key 2 again within 3 seconds when power on again, the light will blink 3 times if matching is released.

No.	Single color modes	Color changing modes
1	red	seven colors gradual change
2	green	white colors gradual change
3	blue	red, green and blue gradual change
4	white	seven colors jump to change
5	yellow	red, green and blue jump to change
6	cyan	red colors gradual change + jump to change
7	purple	green colors gradual change + jump to change
8		blue colors gradual change + jump to change

**ATTENTION:**

- 1. The controller's working voltage is DC12V and it couldn't work with AC voltage..
- 2. The rompte controller's working voltage is 12V(batteries of12V 23A). It will be better if you Pull out antenna to control the lights.