

# JACK MASON


## HALYARD

Nautical Chronograph 42mm

JM-N102-337



### Miyota Caliber No. 0S20 Chronograph Function

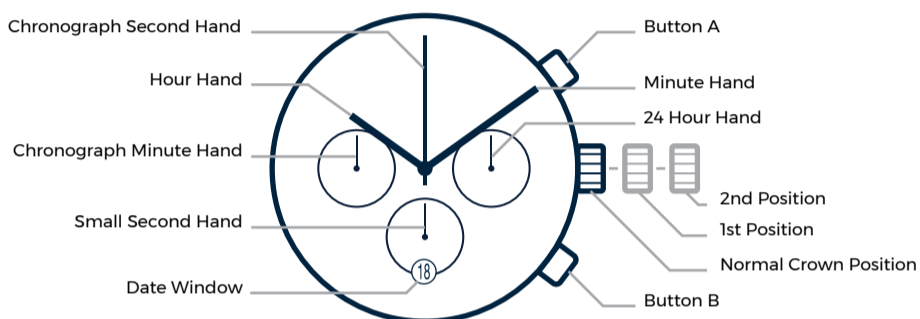

#### Setting The Time

1. Pull the crown out to the **2nd position**.
2. Turn the crown to set **Hour and Minute Hands**.
3. When the crown is pushed back to the **Normal position**, **Small Second Hand** begins to run.

#### Setting The Date

1. Pull the crown out to **1st position**.
2. Turn the crown counter-clockwise to set the date.  
\*Set the date between the hours of 2:00 am to 8:00 pm to ensure the date changes the following day.
3. After the date has been set, push the crown back to **Normal position**.

#### Using The Chronograph Function

This chronograph will measure and display time in 1/1 second units up to a maximum of 59 minutes 59 seconds. The chronograph second hand keeps continuously for 59 minutes 59 seconds after starting.

Measuring time with a Chronograph:

1. The chronograph can be started and stopped each time **Button A** is pressed.
2. Pressing **Button B** resets the chronograph and the **Chronograph Second Hand** and **Chronograph Minute Hand** return to zero position.

#### Chronograph Reset

This Procedure should be performed when the **Chronograph Second Hand** does not return to zero position after the chronograph has been reset, and including after the battery has been replaced.

1. Pull the crown to the **2nd Position**.
2. Press **Button A** to set the chronograph second hand to the zero position. The chronograph hand can be advanced rapidly by continuously pressing **Button A**.
3. Once the hands have been zeroed, return the crown to **Normal Position**.

\*Do not push crown to **Normal Position** while the **Chronograph Second Hand** returns to zero position. It stops on the way when crown are returned to **Normal Position** and its position is recognized as zero position.