


LED current selection

DIP switch for multi optional currents' quick selection (see the table below).




SE-12-100-400-W1A	DIP Switch	↓ ↓ ↑	↓ ↓ ↓	↓ ↑ ↑	↑ ↓ ↓	↑ ↓ ↑	↑ ↑ ↓	↑ ↑ ↑	↑ ON ↓ OFF
	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA	
	Output Voltage	10-42V	10-42V	10-42V	10-42V	10-40V	10-34V	10-30V	
	Output Power	1-4.2W	1.5-6.3W	2-8.4W	2.5-10.5W	3-12W	3.5-12W	4-12W	

SE-12-350-700-W1A	DIP Switch	↓ ↓ ↓	↓ ↓ ↑	↓ ↑ ↓	↓ ↑ ↑	↑ ↓ ↓	↑ ↓ ↑	↑ ↑ ↓	↑ ↑ ↑	↑ ON ↓ OFF
	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	3-24V	3-24V	3-24V	3-24V	3-22V	3-20V	3-18.5V	3-17V	
	Output Power	1.05-8.4W	1.2-9.6W	1.35-10.8W	1.5-12W	1.65-12.1W	1.8-12W	1.95-12W	2.1-12W	

* After current setting by DIP switch, power off and then power on to make the new current effective.

Dimensions

Unit : mm

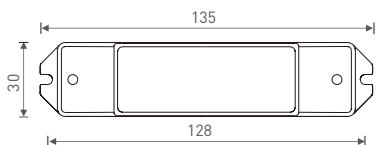

Wiring diagram

