




Description:

Zircoflex[®] is a flexible ceramic heat shield that offers excellent thermal barrier protection at minimal weight and thickness. This product can be easily bent and manipulated to suit various jobs.

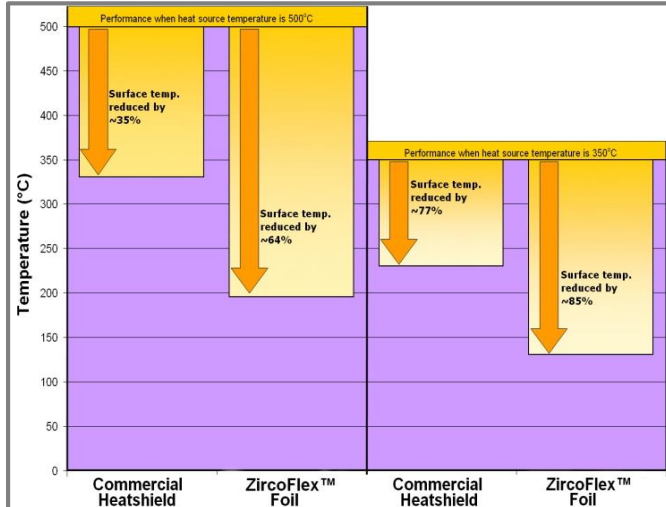

Key Benefits:

- Can be purchased in self adhering
- Available in two sizes
- Lightweight and Thin
- Ease of assembly

Property Data:

Zircoflex [®] I			Zircoflex [®] III		
Characteristics	Metric	English	Characteristics	Metric	English
Thickness	.25-.30 mm	.025cm-.030cm	Thickness	.85-.95mm.	.085cm - .095cm
Mass	460g/m ²	16.2 oz.	Mass	1590g/m ²	56.09 oz.
Continuous Temp Max	500 °C	932 °F	Continuous Temp Max	500 °C	932 °F
Radiant Heat Max	900 °C	1652 °F	Radiant Heat Max	900 °C	1652 °F
Melting Point	660 °C	1220 °F	Melting Point	660 °C	1220 °F
Color/Coating		Plasma Sprayed Zirconium	Color/Coating		Plasma Sprayed Zirconium
Max. Operating Temp. for Adhesive	260 °C	500 °F	Max. Operating Temp. for Adhesive	260 °C	500 °F

All statements herein are expressions of opinion that we believe to be accurate and reliable, but are presented without guaranty or responsibility on our part. Statements concerning possible use of our products are not intended as recommendations for their use alone or in combination with any materials or elements to infringe any patents. No patent warranty of any kind, express or implied, is made or intended.

