

saunas.com

saunas

TECHNOLOGY

Dual stage filter using high-efficiency resin and ultra-high porosity carbon.

PERFORMANCE

- Reduces Scale Build-Up on Heating Elements and the Steam Distribution Systems.
- Reduces scale build-up on the steam room interior, walls, benches, doors, and glass.
- Reduces musty odor smell and discoloration of tile, grout, doors, and glass.
- Reduces build-up on thermostat sensor probe ensuring generator's reliable temperature performance.

BENEFITS

- Significant reduction of steam room down-time and member satisfaction.
- Significant life extension of element and thermostat sensor probe.
- Steam room interior and components look better longer.
- Significant reduction of mineral and musty smells commonly found in commercial steam rooms.
- Cleaner steam creates a cleaner, healthier, more pleasant steam bath experience.
- Reduced cleaning and maintenance.






Steam SHIELD 8000

Health industry's first filter designed specifically for steam boiler and steam generator applications. The Steam SHIELD 8000 has been independently tested by an E.P.A approved laboratory to ANSI/NFS Standard 42 specifications for the reduction of Particulate Class II, Chlorine, Chloramines, Taste and Odor. Industry's best five -year warranty.




General Performance Specifications			
Filter capacity @5 gal:	20,000 Chlorine	Pressure min/max:	40/125 psi
	6,000 Chlorine	Temp min/max:	40/100 deg F
Scale Reduction:	1,500 @ 10 grains	Flow Rate:	1.0 gpm

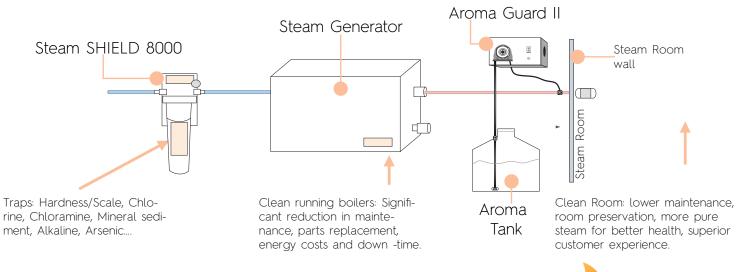





US National Water Hardness Map

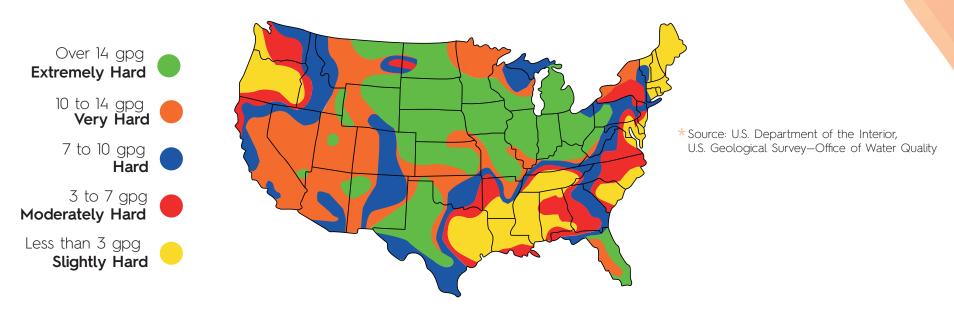

Filter Sizing Guide Over 14 gpg Steam SHIELD 12000 10 to 14 gpg Steam SHIELD 8000 7 to 10 gpg Steam SHIELD 8000 3 to 7 gpg Steam SHIELD 8000 Less than 3 gpg Steam SHIELD 4000











info@saunas.com

1.888.503.8157

