



FUEL MANAGEMENT SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

# A60 / A140 ATEX

## FEATURES

- AUTOMATIC
- READY TO USE
- STURDY DESIGN

Expressly engineered to meet the strictest requirements of the ATEX/IECEX regulations, the PIUSI A60/A140 ATEX is an automatic nozzle suitable to dispense fluids - such as gasoline, kerosene, diesel and others - in potentially explosive atmospheres. It is fitted with a structural component that automatically stops dispensing when the tank is full.



### PERFORMANCE

UP TO <b>140 L/MIN</b>	<b>1" BSP</b>
FLOW RATE	INLET
<b>A60</b> <b>Ø21MM</b>	<b>A140</b> <b>Ø29MM</b>
SPOUT	SPOUT



II 2 G



A60 ATEX



II 2 G



A140 ATEX

### PACKAGING

CODE		WEIGHT		PACKAGING			BOXES/EUROPALLET	
WITHOUT SWIVEL	WITH SWIVEL	KG	LBS	MM	INCH	PCS/BOX		
<b>A60 ATEX</b>								
-	<b>F00613020</b>	1,25	2,76	460X200X80	181X78X31	1	-	-
<b>A140 ATEX</b>								
F22675000	-	2,00	4,41	460X200X80	181X78X31	1	-	-



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

## CHART

### A60 / A140 ATEX

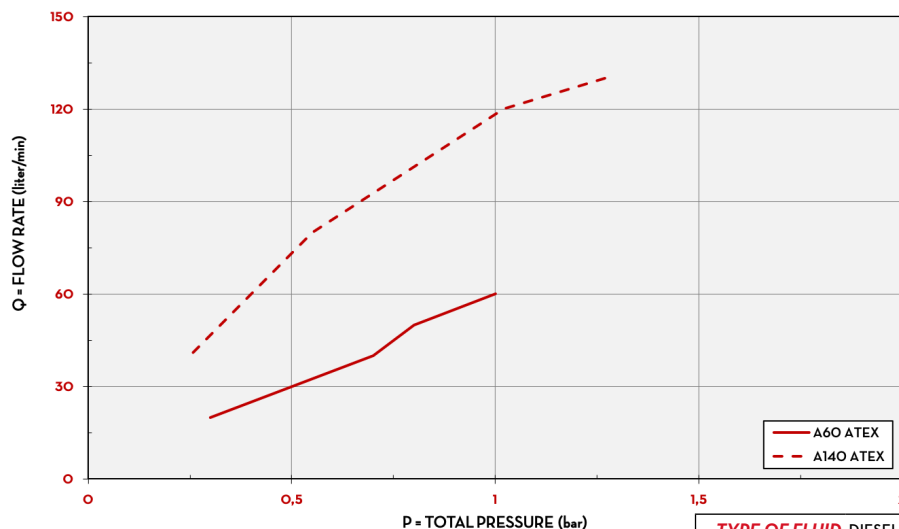

TYPE OF FLUID DIESEL  
TEMPERATURE 20°C



## IN THE BOX

- A60 / A140 ATEX NOZZLE
- INSTRUCTION MANUAL

## DETAILS



## DIMENSIONS

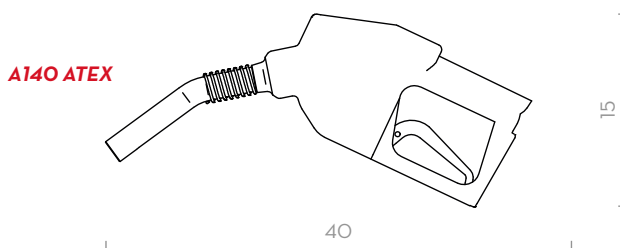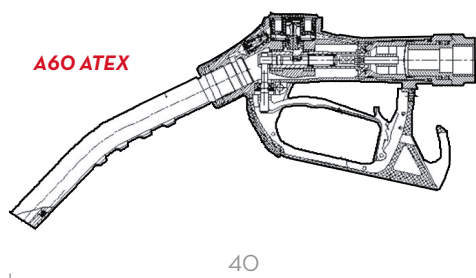

Dimensions expressed in millimeters

## MATERIALS

- BODY: ALUMINIUM
- SEAL: NBR



## TECHNICAL DATA

CODE		DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET		SPOUT
WITHOUT SWIVEL	WITH SWIVEL			L/MIN	GPM	WITHOUT SWIVEL BSP	WITH SWIVEL BSP	EXT. Ø MM
<b>A60 ATEX</b>								
-	FOO613020	A60 ATEX	D G K	60	16	-	F1"	21
<b>A140 ATEX</b>								
F22675000	-	(EX) AUTOMATIC NOZZLE A140 W/OUT SWIVEL	D G K	140	37	F1"	-	28,7

# A60 / A140 ATEX