

TECHNICAL SHEET

FILTER FT600A

Filter 60l/min 25µ with water removal



FEATURES

Filter type	paper + water removal
Efficiency [µm]	25
Flow [l/min]	60
Max pressure [bar]	12
Temperature [°C]	-25/+120
Sealing	NBR
Fluid Compatibility	diesel, oil, vegetable oil, gasoline
Interchangeable with Filter CIM-TEK CT70067	yes

HEAD FT001

- 60l/min 25µ
- in/out 1" BSP
- water removal



MANOMETER FT003


- saturation level indicator
- **BAR** (black line)
- **PSI** (red line)



DIMENSIONS [mm]

A [mm]	96
B [mm]	1" - 12 UNF
C [mm]	213

Flow chart to ISO 3968 (class B)

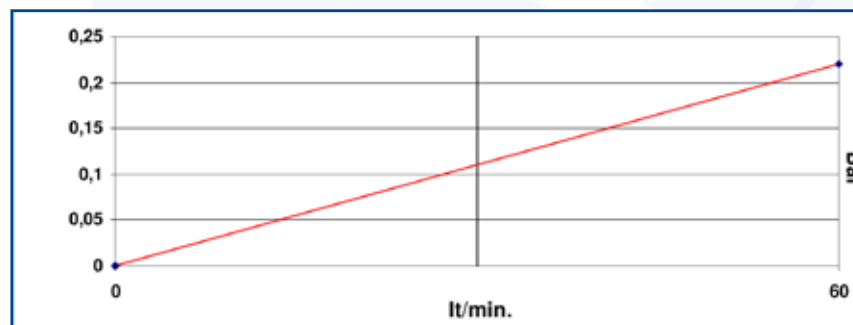

KIT FILTER FT60TA

- head FT001
- cartridge FT600A
- manometer FT003 (optional)

